
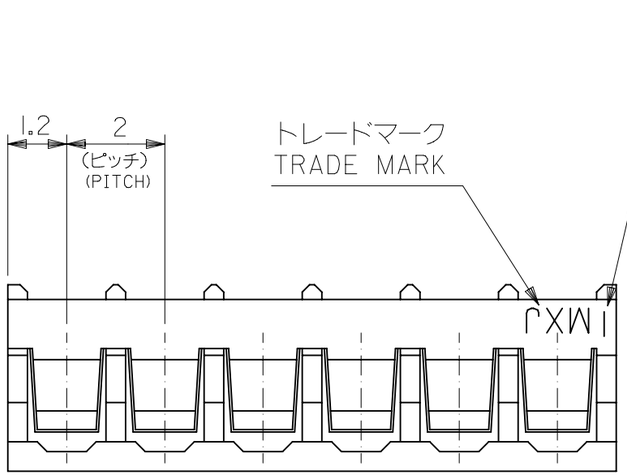
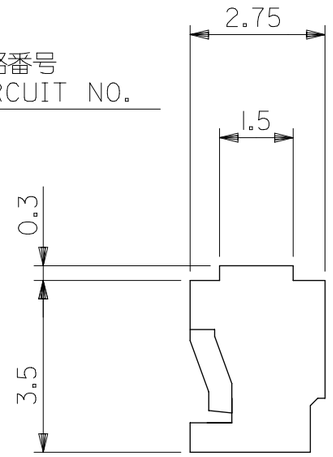
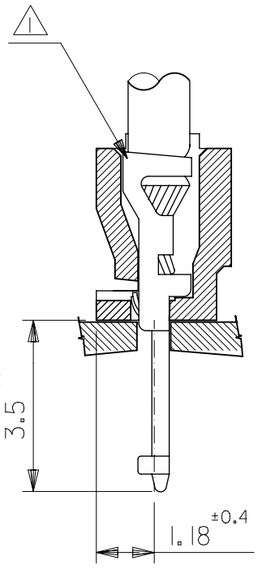


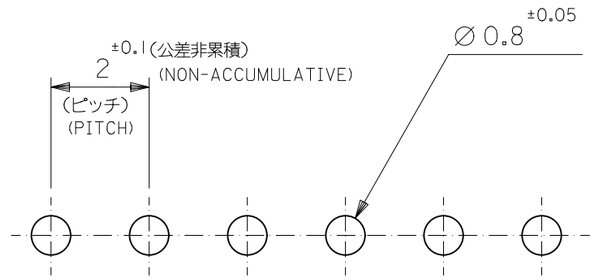


基板取付穴推奨寸法

(基板厚：t＝1～1。6mm)

RECOMMENDED PC BOARD
HOLE DIMENSION
(THICKNESS:t=1～1.6mm)

注記
NOTE

⚠ 適合ターミナル：50034 8*00


APPLICABLE TERMINAL:50034 8*00

2. 材料　ハウジング：　ポリアミド，UL94V-0
色：　ナチュラル（白）

MATERIAL　HOUSING: POLYAMIDE, UL94V-0
COLOR: NATURAL(WHITE)

3. ELV 及び RoHS　適合品

ELV AND RoHS COMPLIANT.

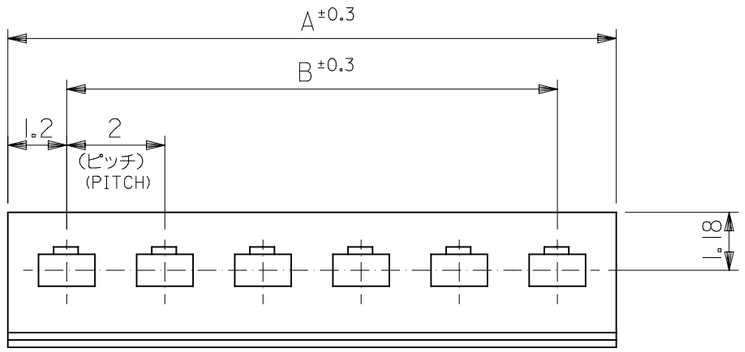


| | | | |
|---|---|---|---|
| 18 | 20.4 | 51015 1000 | 10 |
| 16 | 18.4 | 0900 | 9 |
| 14 | 16.4 | 0800 | 8 |
| 12 | 14.4 | 0700 | 7 |
| 10 | 12.4 | 0600 | 6 |
| 8 | 10.4 | 0500 | 5 |
| 6 | 8.4 | 0400 | 4 |
| 4 | 6.4 | 0300 | 3 |
| 2 | 4.4 | 51015 0200 | 2 |
| B | A | ORDER No. | 極数 NO. OF CKT |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| GENERAL TOLERANCES (UNLESS SPECIFIED) | |
|---|---|
| $10^{UNDER}$ | ±0.2 |
| $10^{OVER}$ $30^{UNDER}$ | ±0.25 |
| $30^{OVER}$ | ±0.3 |
| ANGULAR ±3° | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | |

| DIMENSION UNITS | SCALE |
|---|---|
| mm | 8:1 |

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | |
|---|---|
| ANGULAR TOL | ± ° |
| 4 PLACES | ± |
| 3 PLACES | ± |
| 2 PLACES | ± |
| 1 PLACE | ± |
| 0 PLACES | ± |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: OBSOLETED PART NUMBER AS PER PCN#509988

EC NO: 704776
DRWN: SUGEEB 2022/04/08
CHK'D: GGA 2022/05/24
APPR: GGA 2022/05/24

INITIAL REVISION:
DRWN: RFC_PLMIMP 2018/11/28
APPR: YOITO 2013/04/10

THIRD ANGLE PROJECTION | DRAWING: A3-SIZE | SERIES: 51015

molex

2.0 BOARD IN CONN HSG

PRODUCT CUSTOMER DRAWING

| DOCUMENT NUMBER | DOC TYPE | DOC PART | REVISION |
|---|---|---|---|
| SD-51015-XX00 | PSD | 020 | D |

| MATERIAL NUMBER | CUSTOMER | SHEET NUMBER |
|---|---|---|
| SEE TABLE | GENERAL MARKET | 1 OF 1 |

| DOCUMENT STATUS | P1 | RELEASE DATE | 2022/05/24 10:34:36 |
|---|---|---|---|

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01