
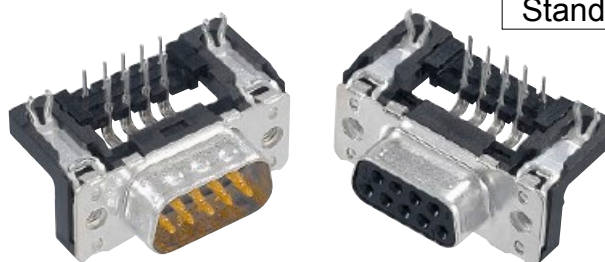


Number of contacts

9–37

Mounting height



Standard Versions

SMC stamped solder pins, angled with grounding board locks

Identification	No. of contacts	Part number	
Performance levels Explanations see page 05.176 Other performance levels on request		Performance level 3	Performance level 2
Male connector metal shell with dimples	9 15 25 37 9 15 25 37	2.84 mm pitch 09 65 167 781 . 1) 09 65 267 781 . 1) 09 65 367 781 . 1) 09 65 467 781 . 1) 2.54 mm pitch 09 65 166 781 . 09 65 266 781 . 09 65 366 781 . 09 65 466 781 .	2.84 mm pitch 09 65 167 681 . 1) 09 65 267 681 . 1) 09 65 367 681 . 1) 09 65 467 681 . 1) 2.54 mm pitch 09 65 166 681 . 09 65 266 681 . 09 65 366 681 . 09 65 466 681 .
Female connector metal shell	9 15 25 37 9 15 25 37	2.84 mm pitch 09 66 157 761 . 1) 09 66 257 761 . 1) 09 66 357 761 . 1) 09 66 457 761 . 1) 2.54 mm pitch 09 66 156 761 . 09 66 256 761 . 09 66 356 761 . 09 66 456 761 .	2.84 mm pitch 09 66 157 661 . 1) 09 66 257 661 . 1) 09 66 357 661 . 1) 09 66 457 661 . 1) 2.54 mm pitch 09 66 156 661 . 09 66 256 661 . 09 66 356 661 . 09 66 456 661 .
Please insert digit for flange thread or fitted female screw locks Ø 3.1 mm hole ▶ 0 ¹⁾ M3 ▶ 1 4-40 UNC ▶ 2 fitted screw locks 4-40 UNC ▶ 3			