

## FOR 5 x 20 mm FUSES

### 5 x 20 mm Low Amperage P.C. Board Type



**APPROVALS:** Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.

**SPECIFICATIONS:**

**Electrical:** Rated for 3.15 amperes at 250 volts.

**Dielectric Strength:** 3000 volts minimum.



**Terminals:** Tin plated copper alloy.

**Base:** Gray thermoplastic with UL 94V0 flammability rating.

**Ambient Temperature:** 60°C maximum.

**ORDERING INFORMATION:**

| Catalog Number | Number of Poles |
|----------------|-----------------|
| 354 252        | 1               |

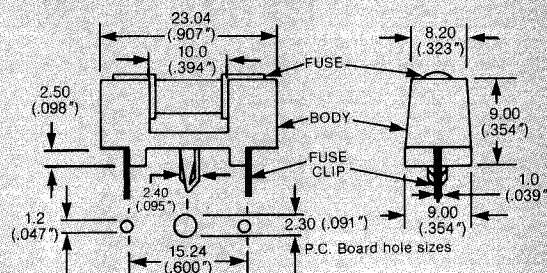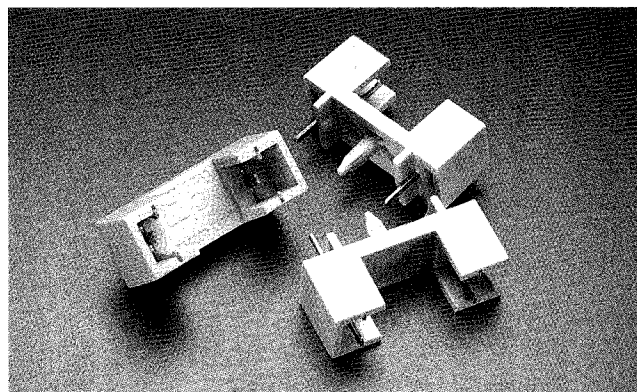

Note: Metric dimensions are shown. Inches are in parentheses.

### 5 x 20 mm P.C. Board Type

**SPECIFICATIONS:**

**Electrical:** Rated for currents up to 6.3 amperes, 250 volts.



**Clip/Terminals:** Tin plated spring brass. Ear type.

**Base:** Phenolic laminate. UL 94V0 flammability rating.

**Ambient Temperature:** 120°C maximum.

**ORDERING INFORMATION:**

| Catalog Number | Number of Poles |
|----------------|-----------------|
| 520 002        | 1               |

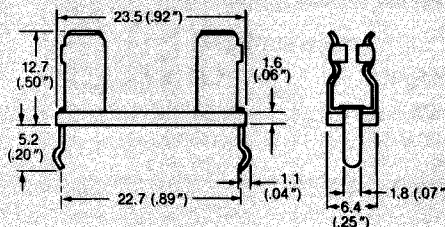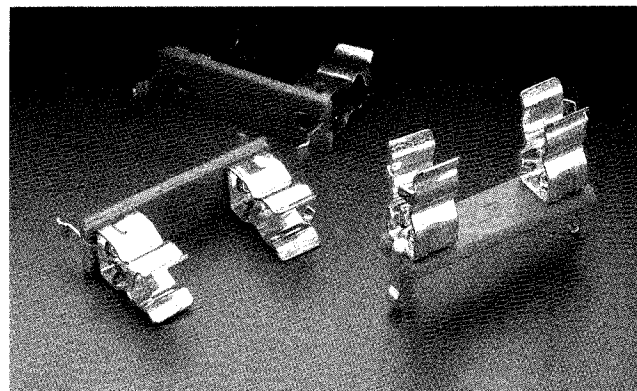

Note: Metric dimensions are shown. Inches are in parentheses.