
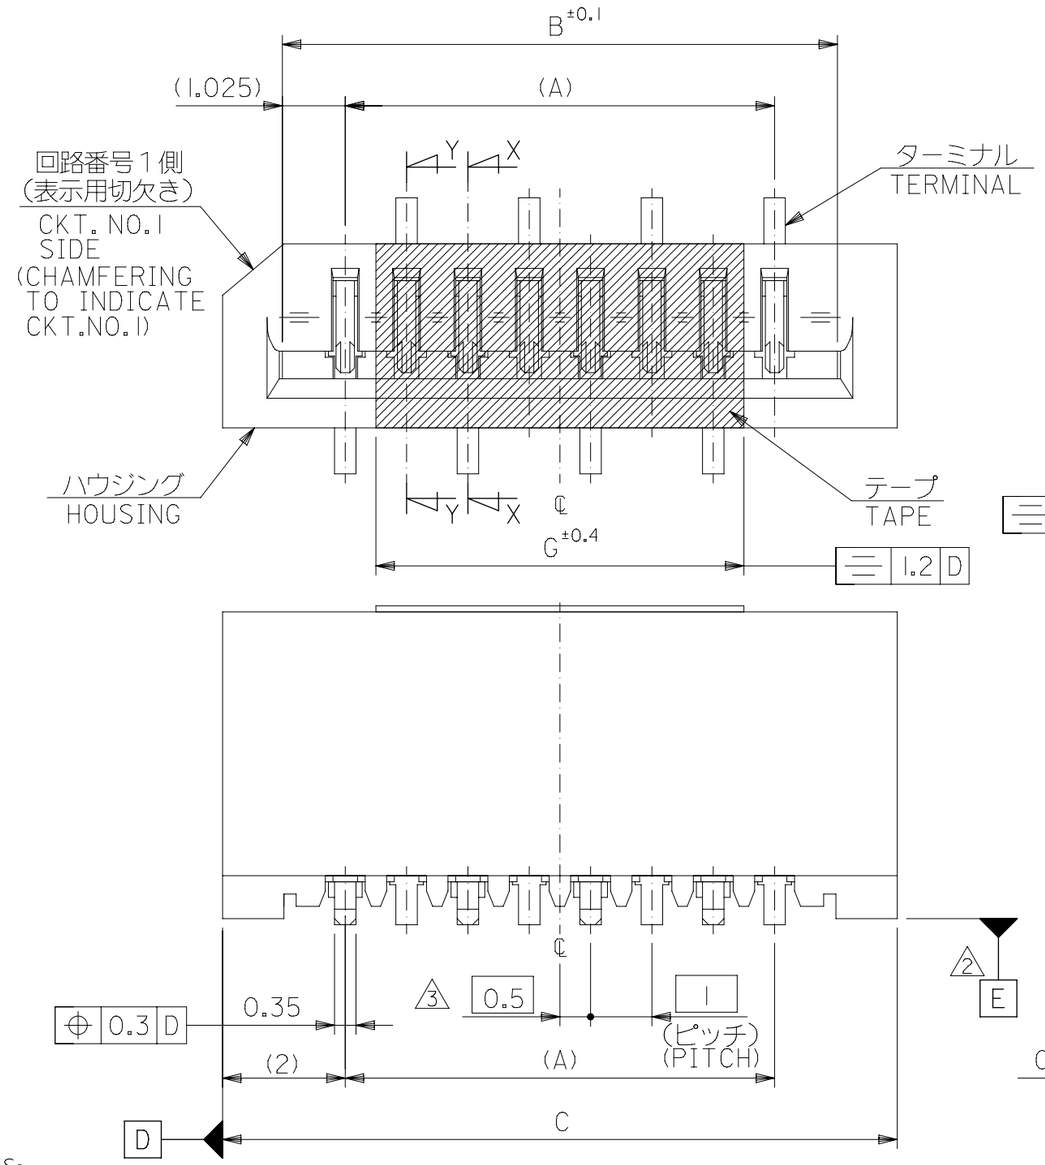
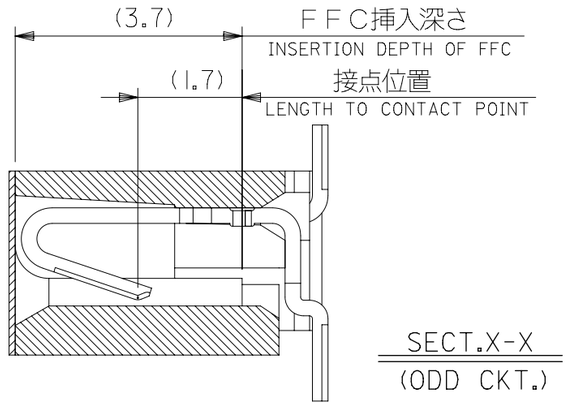



SECT.X-X
(ODD CKT.)

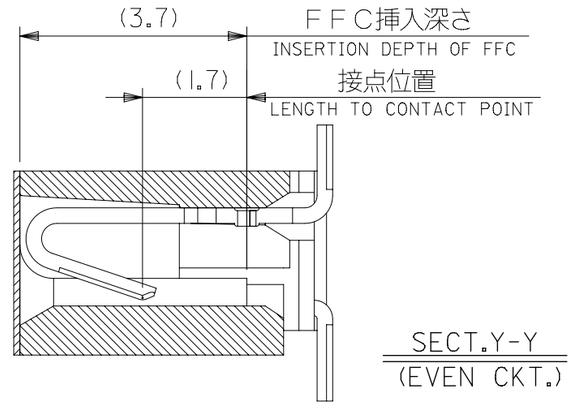


SECT.Y-Y
(EVEN CKT.)

| | | | | | |
|---|---|---|---|---|---|
| | 33 | 31.05 | 29 | 52808-3029 | 30 |
| | 32 | 30.05 | 28 | -2929 | 29 |
| | 31 | 29.05 | 27 | -2829 | 28 |
| | 30 | 28.05 | 26 | -2729 | 27 |
| | 29 | 27.05 | 25 | -2629 | 26 |
| | 28 | 26.05 | 24 | -2529 | 25 |
| | 27 | 25.05 | 23 | -2429 | 24 |
| | 26 | 24.05 | 22 | -2329 | 23 |
| | 25 | 23.05 | 21 | -2229 | 22 |
| | 24 | 22.05 | 20 | -2129 | 21 |
| | 23 | 21.05 | 19 | -2029 | 20 |
| | 22 | 20.05 | 18 | -1929 | 19 |
| 6 | 21 | 19.05 | 17 | -1829 | 18 |
| | 20 | 18.05 | 16 | -1729 | 17 |
| | 19 | 17.05 | 15 | -1629 | 16 |
| | 18 | 16.05 | 14 | -1529 | 15 |
| | 17 | 15.05 | 13 | -1429 | 14 |
| | 16 | 14.05 | 12 | -1329 | 13 |
| | 15 | 13.05 | 11 | -1229 | 12 |
| | 14 | 12.05 | 10 | -1129 | 11 |
| | 13 | 11.05 | 9 | -1029 | 10 |
| | 12 | 10.05 | 8 | -0929 | 9 |
| | 11 | 9.05 | 7 | -0829 | 8 |
| | 10 | 8.05 | 6 | -0729 | 7 |
| | 9 | 7.05 | 5 | -0629 | 6 |
| 4 | 8 | 6.05 | 4 | -0529 | 5 |
| | 7 | 5.05 | 3 | 52808-0429 | 4 |
| G | C | B | A | MATERIAL NO. | 極数 CIRCUIT |

注記
NOTES:

1. 使用材料 MATERIAL

| | |
|---|---|
| ハウジング：PPS,UL94V-0 | HOUSING :PPS, UL94V-0 |
| ターミナル：リン青銅 | TERMINAL :PHOSPHOR BRONZE |
| メッキ：ニッケル下地　錫ビスマスメッキ | PLATING :TIN-BISMUTH OVER NICKEL PLATING |
| テープ：ポリイミド（t＝50μm） | TAPE :PI (t=50μm) |

2. 基準面 E からのソルダーテールの半田付け面のズレ量は、
上方向に0．1MAX．下方向0．15MAX．とする。
MISALIGNMENT OF SOLDER TAIL FROM E
: UPPER DIRECTION 0.1 MAX. , LOWER DIRECTION 0.15 MAX.
3. 偶数極に適用。
APPLY FOR EVEN CKT.
4. 本製品は　52808-**20　の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52808-**20.

ＦＰＣについて：
打抜き方向は導体側から補強板を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。
ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL :
STIFFENER FILM : POLYIMIDE
BONDING AGENT : THERMOSETTING BONDING AGENT

| GENERAL TOLERANCES (UNLESS SPECIFIED) | | | |
|---|---|---|---|
| 0.25 UNDER | | UNDER | ±0.03 |
| 0.25 OVER | 0.5 | UNDER | ±0.05 |
| 0.5 OVER | 1.0 | UNDER | ±0.1 |
| 1.0 OVER | 10 | UNDER | ±0.2 |
| 10 OVER | 30 | UNDER | ±0.25 |
| 30 OVER | | | ±0.3 |

| | |
|---|---|
| DIMENSION UNITS | mm |
| SCALE | 10:1 |
| GENERAL TOLERANCES (UNLESS SPECIFIED) | |
| ANGULAR TOL ± | 3.0 ° |
| 4 PLACES ± | |
| 3 PLACES ± | |
| 2 PLACES ± | |
| 1 PLACE ± | |
| 0 PLACES ± | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

CURRENT REV DESC:

EC NO: 760212
DRWN: RAJMOK 2023/08/03
CHK'D: HSHIMOYAMA 2023/08/21
APPR: YNAITO 2023/08/21

INITIAL REVISION:
DRWN: MNINOMIYA 2004/02/18
APPR: MSASAO 2004/02/19

THIRD ANGLE PROJECTION | DRAWING: A3-SIZE | SERIES: 52808

molex

1.0 FFC CONN. NON ZIF
SMT ST (WITH TAPE) -LEAD FREE-


PRODUCT CUSTOMER DRAWING

| DOCUMENT NUMBER | DOC TYPE | DOC PART | REVISION |
|---|---|---|---|
| SD-52808-025 | PSD | 001 | F |


| MATERIAL NUMBER | CUSTOMER | SHEET NUMBER |
|---|---|---|
| SEE TABLE | GENERAL MARKET | 1 OF 2 |

| DOCUMENT STATUS | P1 | RELEASE DATE | 2023/08/21 09:52:47 |
|---|---|---|---|

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01

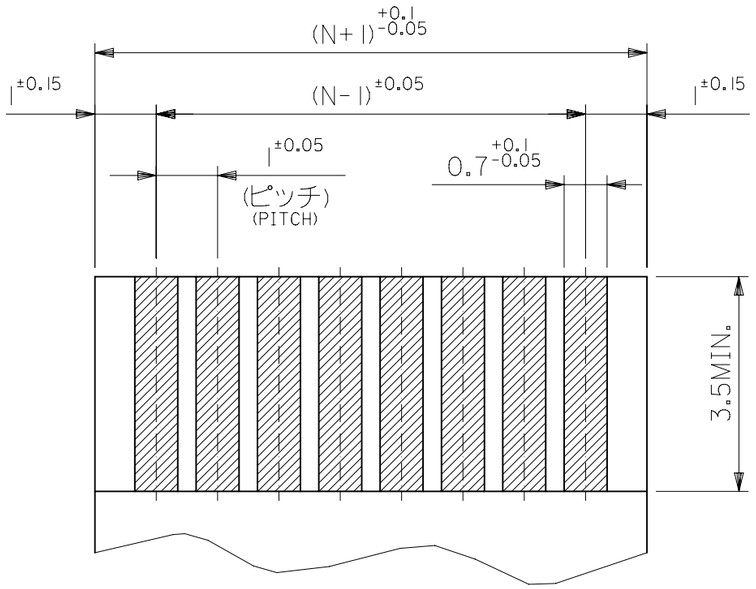


（仕上がり厚さ0.3±0.03）
THICKNESS
適合ＦＰＣ／ＦＦＣ推奨寸法
APPLICABLE FPC/FFC
RECOMMENDED DIMENSION.

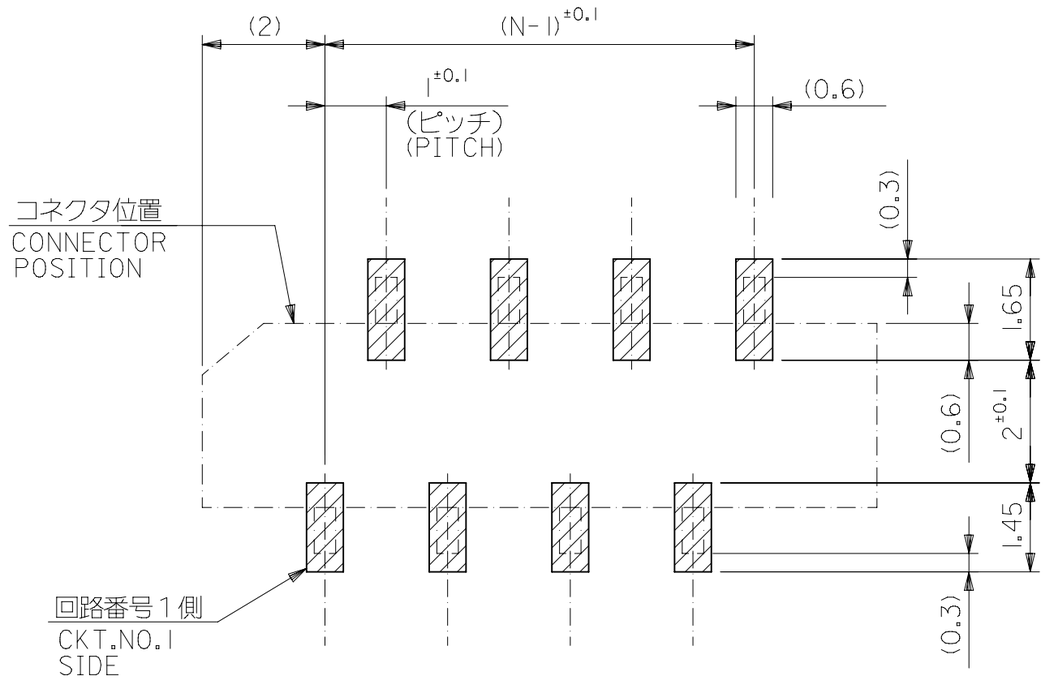


参考基板レイアウト（マウント面）
RECOMMENDED P.C.BOARD
PATTERN DIMENSION.(REF.)
(MOUNTING AREA)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| GENERAL TOLERANCES (UNLESS SPECIFIED) | | | |
|---|---|---|---|
| 0.25 UNDER | | UNDER | ±0.03 |
| 0.25 OVER | 0.5 | UNDER | ±0.05 |
| 0.5 OVER | 1.0 | UNDER | ±0.1 |
| 1.0 OVER | 10 | UNDER | ±0.2 |
| 10 OVER | 30 | UNDER | ±0.25 |
| 30 OVER | | | ±0.3 |

| | |
|---|---|
| DIMENSION UNITS | mm |
| SCALE | 10:1 |
| GENERAL TOLERANCES (UNLESS SPECIFIED) | |
| ANGULAR TOL | ± 3.0 ° |
| 4 PLACES | ± |
| 3 PLACES | ± |
| 2 PLACES | ± |
| 1 PLACE | ± |
| 0 PLACES | ± |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | |

CURRENT REV DESC:

EC NO: 760212
DRWN: RAJMOK 2023/08/03
CHK'D: HSHIMOYAMA 2023/08/21
APPR: YNAITO 2023/08/21

INITIAL REVISION:
DRWN: MNINOMIYA 2004/02/18
APPR: MSASAO 2004/02/19

molex

1.0 FFC CONN. NON ZIF
SMT ST (WITH TAPE) -LEAD FREE-


PRODUCT CUSTOMER DRAWING

| DOCUMENT NUMBER | DOC TYPE | DOC PART | REVISION |
|---|---|---|---|
| SD-52808-025 | PSD | 001 | F |

| THIRD ANGLE PROJECTION | DRAWING | SERIES | MATERIAL NUMBER | CUSTOMER | SHEET NUMBER |
|---|---|---|---|---|---|
| | A3-SIZE | 52808 | SEE SHEET-1 | GENERAL MARKET | 2 OF 2 |

| DOCUMENT STATUS | P1 | RELEASE DATE | 2023/08/21 09:52:47 |
|---|---|---|---|


FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01

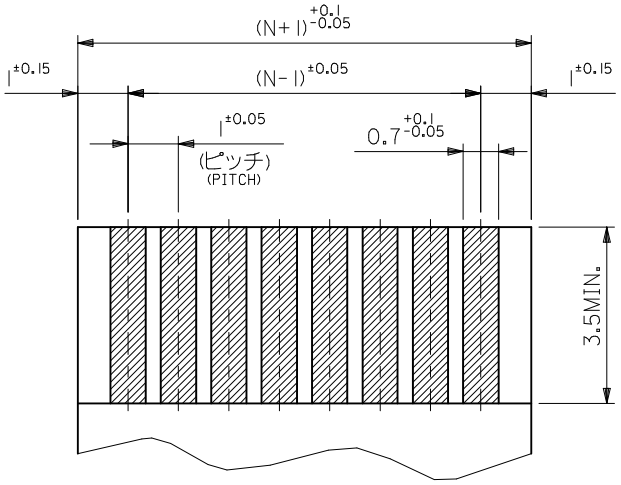


(仕上がり厚さ0．3 ±0.03 THICKNESS)

適合ＦＰＣ／ＦＦＣ推奨寸法

APPLICABLE FPC/FFC RECOMMENDED DIMENSION.

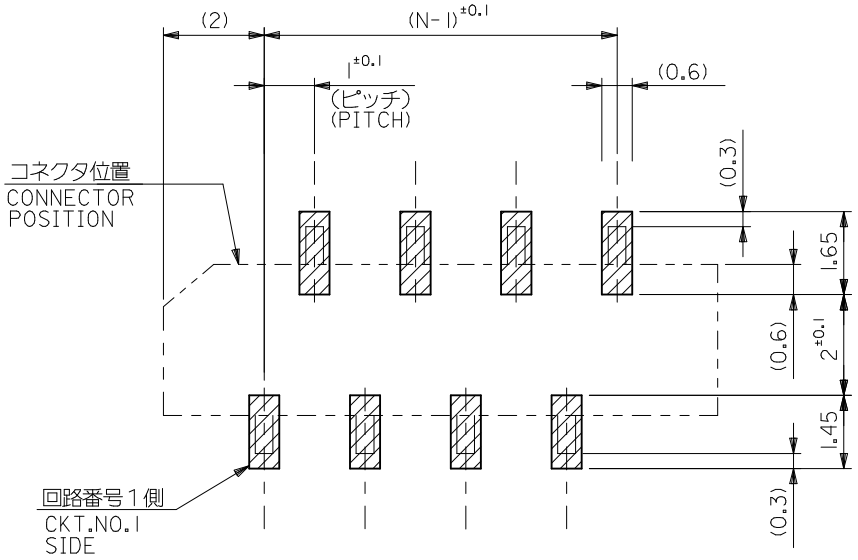


参考基板レイアウト（マウント面）

RECOMMENDED P.C.BOARD PATTERN DIMENSION.(REF.) (MOUNTING AREA)

SEE SHEET 1 OF 2

EC NO: J2015-0830 2014/12/19

DRWN:NASANUMA 2015/02/06

CH'KD:KTAKAHASHI 2015/02/23

APPR:YNOGAWA

DESCRIPTION


REV D

| GENERAL TOLERANCES (UNLESS SPECIFIED) | | | | |
|---|---|---|---|---|
| 0.25 | UNDER | | UNDER | ±0.03 |
| 0.25 | OVER | 0.5 | UNDER | ±0.05 |
| 0.5 | OVER | 1.0 | UNDER | ±0.1 |
| 1.0 | OVER | 10 | UNDER | ±0.2 |
| 10 | OVER | 30 | UNDER | ±0.25 |
| 30 | OVER | | | ±0.3 |
| ANGULAR ±3 ° | | | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS


| | |
|---|---|
| DIMENSION STYLE | MM ONLY |
| SCALE | 10:1 |
| DESIGN UNITS | METRIC |
| | THIRD ANGLE PROJECTION |
| DRAWN BY / DATE | MNINOMIYA 2004/02/09 |
| CHECKED BY / DATE | KTOJO 2004/02/09 |
| APPROVED BY / DATE | MSASAO 2004/02/09 |
| MATERIAL NO. | SEE SHEET 1 OF 2 |
| TITLE | 1.0 FFC CONN. NON ZIF SMT ST (WITH TAPE) -LEAD FREE- |
| | molex |
| DOCUMENT NO. | SD-52808-025 |
| SHEET NO. | 2 OF 2 |
| SIZE | A3 |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

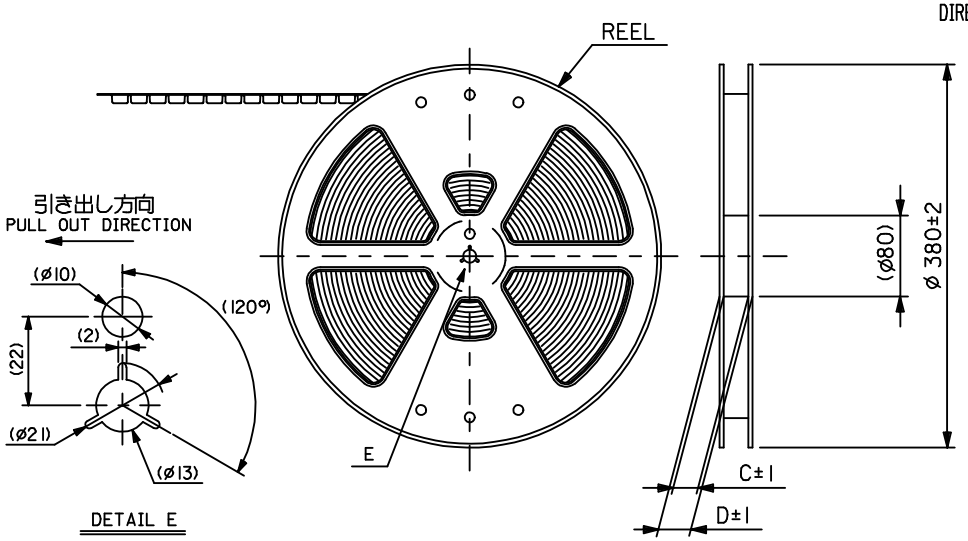



NOTES

1. 製品詳細寸法については図面 SD-52808-025 を参照下さい。
   RE DETAILED DIMENSION, SEE SD-52808-025.
2. 梱包数量：1000個／リール
   NUMBER OF CONNECTORS : 1000PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

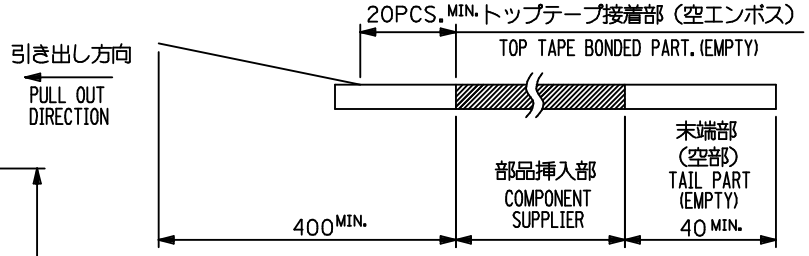


4. トップテープの剥離強度： 0.1N ～ 1.3N{10gf ～ 130gf}
   （剥離方向は下図参照）
   尚、本規格値は出荷時に適用。（但し、輸送時に剥離が発生しないこと。）
   PEELING OFF FORCE OF TOP TAPE : 0.1N ～ 1.3N{10gf ～ 130gf}
   (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
   THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
   PEEL OFF SHOULD NOT BE ALLOWED , DURING TRANSPORTATION.




5. 材料(MATERIAL)
   キャリアテープ(CARRIER TAPE)：ポリプロピレン(POLYPROPYLENE)
   トップテープ(TOPTAPE)： PET , PE , PEF
   リール(REEL)：ポリスチレン（PS）<リサイクル材を含む>
   POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>
6. MXI製造製品は紙リールを使用すること。
   ONLY MXI PRODUCT ITEM SHOULD USE CARD BOARD REEL.
7. 本製品は 52808-**91 の鉛フリー品である。
   THIS PRODUCT IS LEAD FREE OF 52808-**91.


| REVISED | EC NO: | DESCRIPTION | REV |
|---|---|---|---|
| DRWN:NASANUMA | J2015-0830 | 2014/12/18 | C |
| CH'KD:KTAKAHASHI | | 2015/02/06 | |
| APPR:YNOGAWA | | 2015/02/23 | |

GENERAL TOLERANCES (UNLESS SPECIFIED)


| | | | | |
|---|---|---|---|---|
| 0.25 | UNDER | | UNDER | ±0.03 |
| 0.25 | OVER | 0.5 | UNDER | ±0.05 |
| 0.5 | OVER | 1.0 | UNDER | ±0.1 |
| 1.0 | OVER | 10 | UNDER | ±--- |
| 10 | OVER | 30 | UNDER | ±--- |
| 30 | OVER | | | ±--- |
| ANGULAR | | ±--- ° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS


| | | | |
|---|---|---|---|
| MODEL NO. | | 52808-**71 | |
| DIMENSION STYLE | SCALE | DESIGN UNITS | THIRD ANGLE PROJECTION |
| MM ONLY | --- | METRIC | |
| DRAWN BY: MNINOMIYA DATE: 2004/02/09 | TITLE: 1.0 FFC CONN NON ZIF SMT ST WITH TAPE EMBSTP PKG -LEAD FREE- | | |
| CHECKED BY: KTOJO DATE: 2004/02/09 | | | |
| APPROVED BY: DATE | molex | | |
| MATERIAL NO.: SEE CHART | DOCUMENT NO.: SD-52808-026 | SHEET NO.: 1 OF 6 | |
| SIZE: A3 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | |

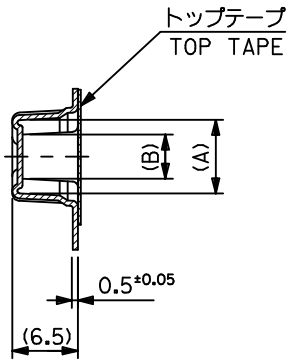


SECT:Y-Y

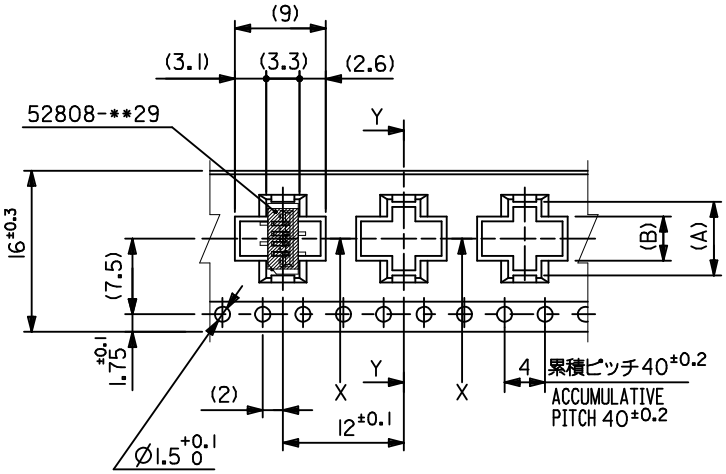


引き出し方向
PULL OUT DIRECTION

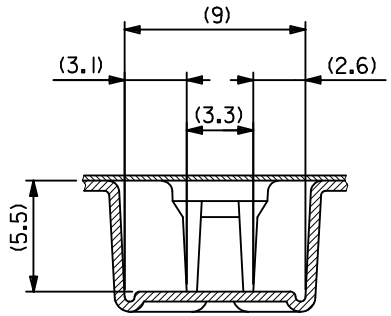


SECT:X-X

16mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

| | | | | | | |
|---|---|---|---|---|---|---|
| 16 | 21.4 | 17.4 | 5.4 | 8.3 | 52808-0571 | 5 |
| | | | 4.4 | 7.3 | 52808-0471 | 4 |
| キャリアテープ幅 CARRIER TAPE WIDTH | D | C | (B) | (A) | MATERIAL NO. | 極数 CKT. |
| MODEL NO. | | | 52808-**71 | | | |

SEE SHEET 1 OF 6
EC NO: J2015-0830 2014/12/18
DRWN:NASANUMA 2015/02/06
CH'KD:KTAKAHASHI 2015/02/23
APPR:YNOGAWA
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | | | |
|---|---|---|---|
| 0.25 | UNDER | UNDER | ±0.03 |
| 0.25 | OVER 0.5 | UNDER | ±0.05 |
| 0.5 | OVER 1.0 | UNDER | ±0.1 |
| 1.0 | OVER 10 | UNDER | ±--- |
| 10 | OVER 30 | UNDER | ±--- |
| 30 | OVER | | ±--- |
| ANGULAR | ±--- ° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


DRAWN BY: MNINOMIYA DATE: 2004/02/09
CHECKED BY: KTOJO DATE: 2004/02/09
APPROVED BY: DATE

TITLE: 1.0 FFC CONN NON ZIF SMT ST WITH TAPE EMBSTP PKG -LEAD FREE-


molex


MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-52808-026
SHEET NO.: 2 OF 6
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

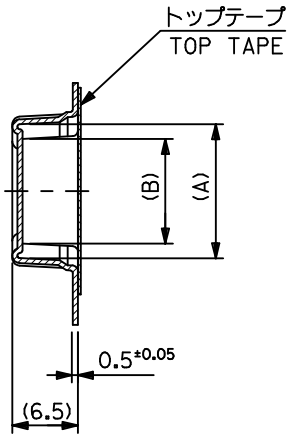


SECT:Y-Y

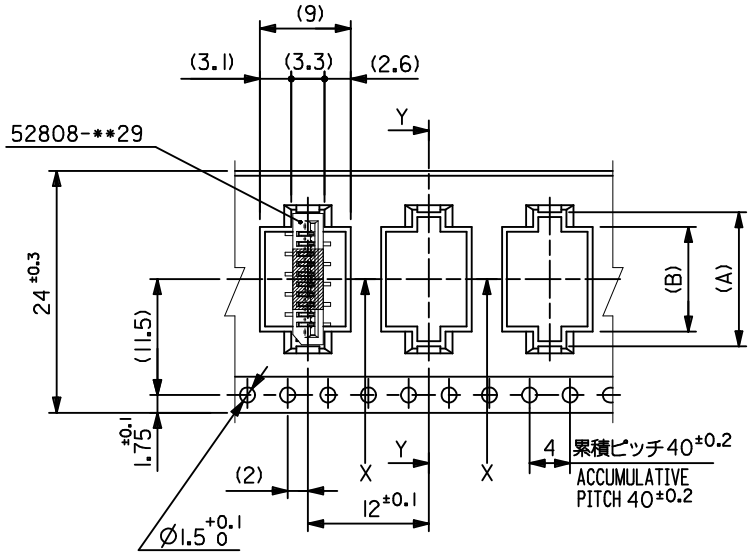

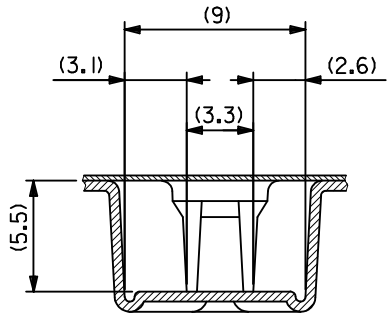
SECT:X-X

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

| キャリアテープ幅 CARRIER TAPE WIDTH | D | C | (B) | (A) | MATERIAL NO. | 極数 CKT. |
|---|---|---|---|---|---|---|
| 24 | 29.4 | 25.4 | 10.4 | 13.3 | 52808-1071 | 10 |
| | | | 9.4 | 12.3 | 52808-0971 | 9 |
| | | | 8.4 | 11.3 | 52808-0871 | 8 |
| | | | 7.4 | 10.3 | 52808-0771 | 7 |
| | | | 6.4 | 9.3 | 52808-0671 | 6 |
| MODEL NO. | | | 52808-**71 | | | |

SEE SHEET 1 OF 6
EC NO: J2015-0830 2014/12/18
DRWN:NASANUMA 2015/02/06
CH'KD:KTAKAHASHI 2015/02/23
APPR:YNOGAWA
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | | | |
|---|---|---|---|
| 0.25 | UNDER | UNDER | ±0.03 |
| 0.25 | OVER 0.5 | UNDER | ±0.05 |
| 0.5 | OVER 1.0 | UNDER | ±0.1 |
| 1.0 | OVER 10 | UNDER | ±--- |
| 10 | OVER 30 | UNDER | ±--- |
| 30 | OVER | | ±--- |
| ANGULAR | ±--- ° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


DRAWN BY: MNINOMIYA DATE: 2004/02/09
CHECKED BY: KTOJO DATE: 2004/02/09
APPROVED BY: DATE:

TITLE: 1.0 FFC CONN NON ZIF SMT ST WITH TAPE EMBSTP PKG -LEAD FREE-

molex

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-52808-026
SHEET NO.: 3 OF 6
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

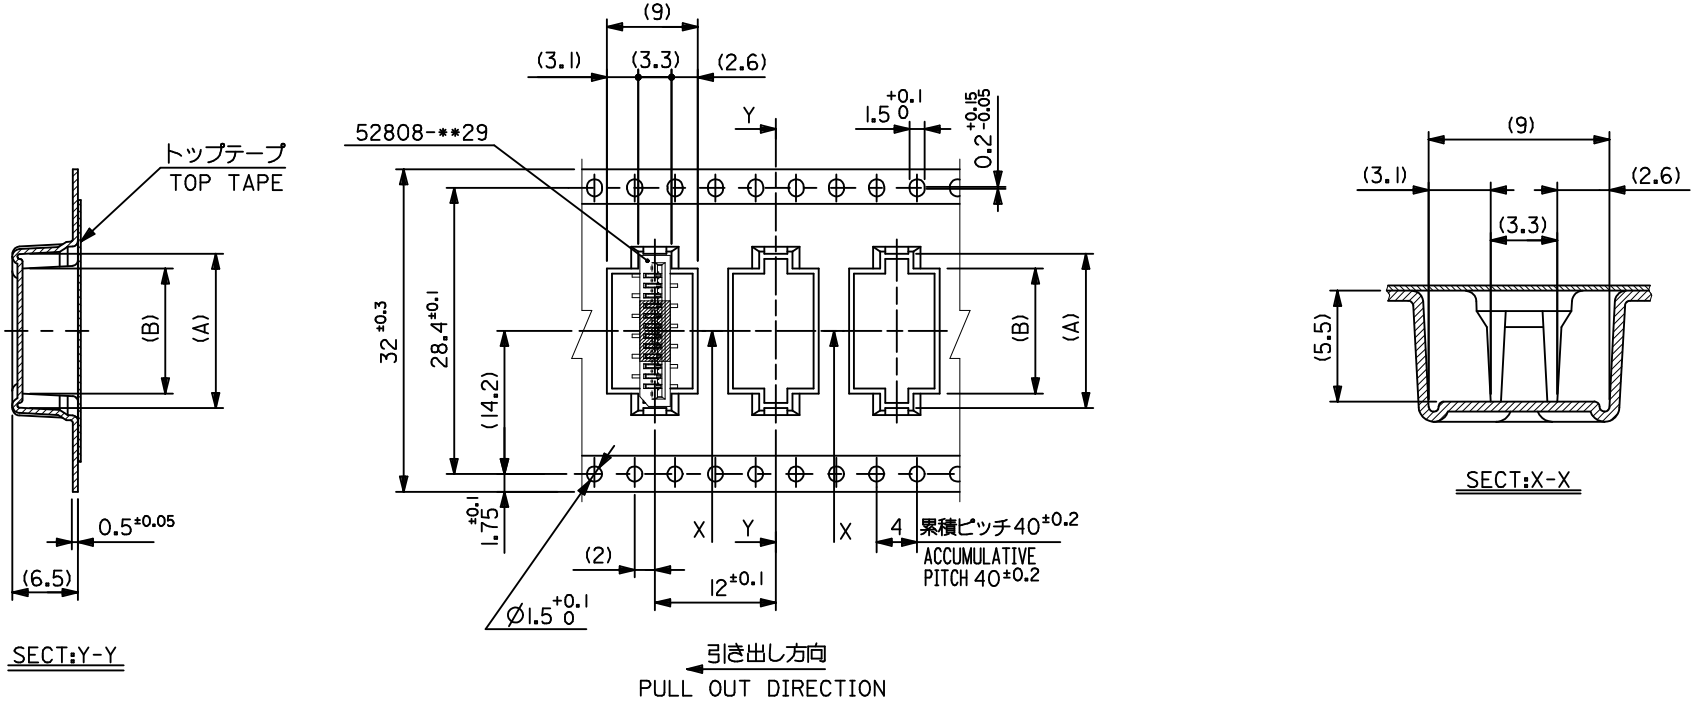


32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

| キャリアテープ幅 CARRIER TAPE WIDTH | D | C | (B) | (A) | MATERIAL NO. | 極数 CKT. |
|---|---|---|---|---|---|---|
| 32 | 37.4 | 33.4 | 15.4 | 18.3 | 52808-1571 | 15 |
| | | | 14.4 | 17.3 | 52808-1471 | 14 |
| | | | 13.4 | 16.3 | 52808-1371 | 13 |
| | | | 12.4 | 15.3 | 52808-1271 | 12 |
| | | | 11.4 | 14.3 | 52808-1171 | 11 |
| MODEL NO. | | | 52808-**71 | | | |

SEE SHEET 1 OF 6
EC NO: J2015-0830 2014/12/18
DRWN:NASANUMA 2015/02/06
CH'KD:KTAKAHASHI 2015/02/23
APPR:YNOGAWA
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | | | |
|---|---|---|---|
| 0.25 | UNDER | UNDER | ±0.03 |
| 0.25 | OVER 0.5 | UNDER | ±0.05 |
| 0.5 | OVER 1.0 | UNDER | ±0.1 |
| 1.0 | OVER 10 | UNDER | ±--- |
| 10 | OVER 30 | UNDER | ±--- |
| 30 | OVER | | ±--- |
| ANGULAR | ±--- ° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


DRAWN BY: MNINOMIYA DATE: 2004/02/09
CHECKED BY: KTOJO DATE: 2004/02/09
APPROVED BY: DATE

TITLE: 1.0 FFC CONN NON ZIF SMT ST WITH TAPE EMBSTP PKG -LEAD FREE-


molex

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-52808-026
SHEET NO.: 4 OF 6
SIZE: A3


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

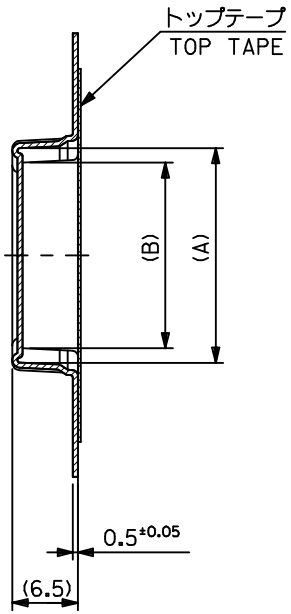


SECT:Y-Y

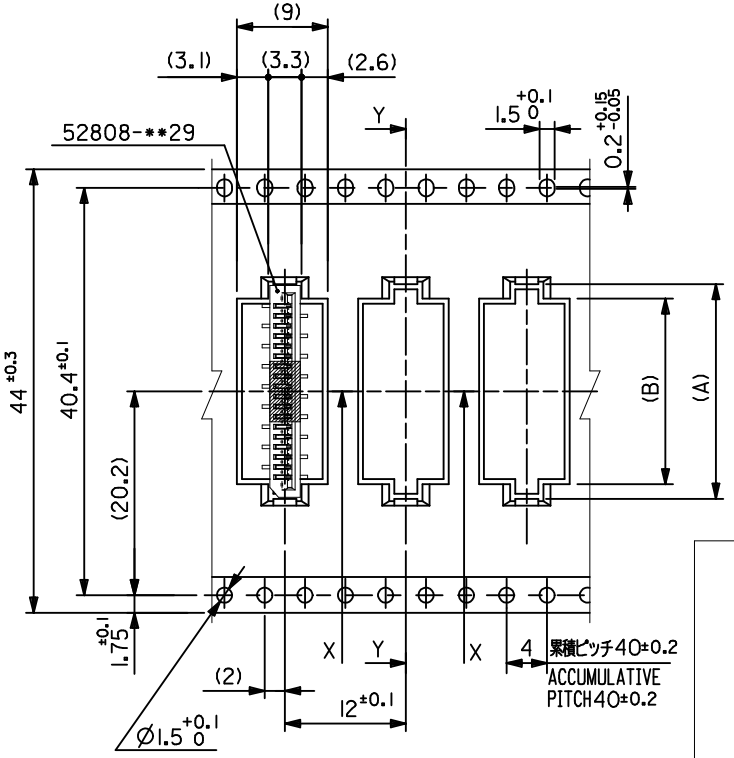


引き出し方向
PULL OUT DIRECTION

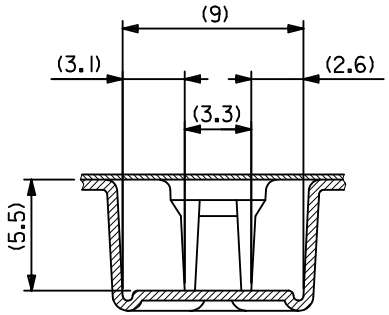


SECT:X-X

44mm幅キャリアテープ
44mm WIDTH CARRIER TAPE

| キャリアテープ幅 CARRIER TAPE WIDTH | D | C | (B) | (A) | MATERIAL NO. | 極数 CKT. |
|---|---|---|---|---|---|---|
| 44 | 49.4 | 45.4 | 28.4 | 31.3 | 52808-2871 | 28 |
| | | | 27.4 | 30.3 | 52808-2771 | 27 |
| | | | 26.4 | 29.3 | 52808-2671 | 26 |
| | | | 25.4 | 28.3 | 52808-2571 | 25 |
| | | | 24.4 | 27.3 | 52808-2471 | 24 |
| | | | 23.4 | 26.3 | 52808-2371 | 23 |
| | | | 22.4 | 25.3 | 52808-2271 | 22 |
| | | | 21.4 | 24.3 | 52808-2171 | 21 |
| | | | 20.4 | 23.3 | 52808-2071 | 20 |
| | | | 19.4 | 22.3 | 52808-1971 | 19 |
| | | | 18.4 | 21.3 | 52808-1871 | 18 |
| | | | 17.4 | 20.3 | 52808-1771 | 17 |
| | | | 16.4 | 19.3 | 52808-1671 | 16 |
| MODEL NO. | | | 52808-**71 | | | |

SEE SHEET 1 OF 6
EC NO: J2015-0830 2014/12/18
DRWN:NASANUMA 2015/02/06
CH'KD:KTAKAHASHI 2015/02/23
APPR:YNOGAWA
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | | | |
|---|---|---|---|
| 0.25 | UNDER | UNDER | ±0.03 |
| 0.25 | OVER 0.5 | UNDER | ±0.05 |
| 0.5 | OVER 1.0 | UNDER | ±0.1 |
| 1.0 | OVER 10 | UNDER | ±--- |
| 10 | OVER 30 | UNDER | ±--- |
| 30 | OVER | | ±--- |
| ANGULAR | ±--- ° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


DRAWN BY: MNINOMIYA DATE: 2004/02/09
CHECKED BY: KTOJO DATE: 2004/02/09
APPROVED BY: DATE:
MATERIAL NO.: SEE CHART

TITLE: 1.0 FFC CONN NON ZIF SMT ST WITH TAPE EMBSTP PKG -LEAD FREE-


molex

DOCUMENT NO.: SD-52808-026
SHEET NO.: 5 OF 6
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

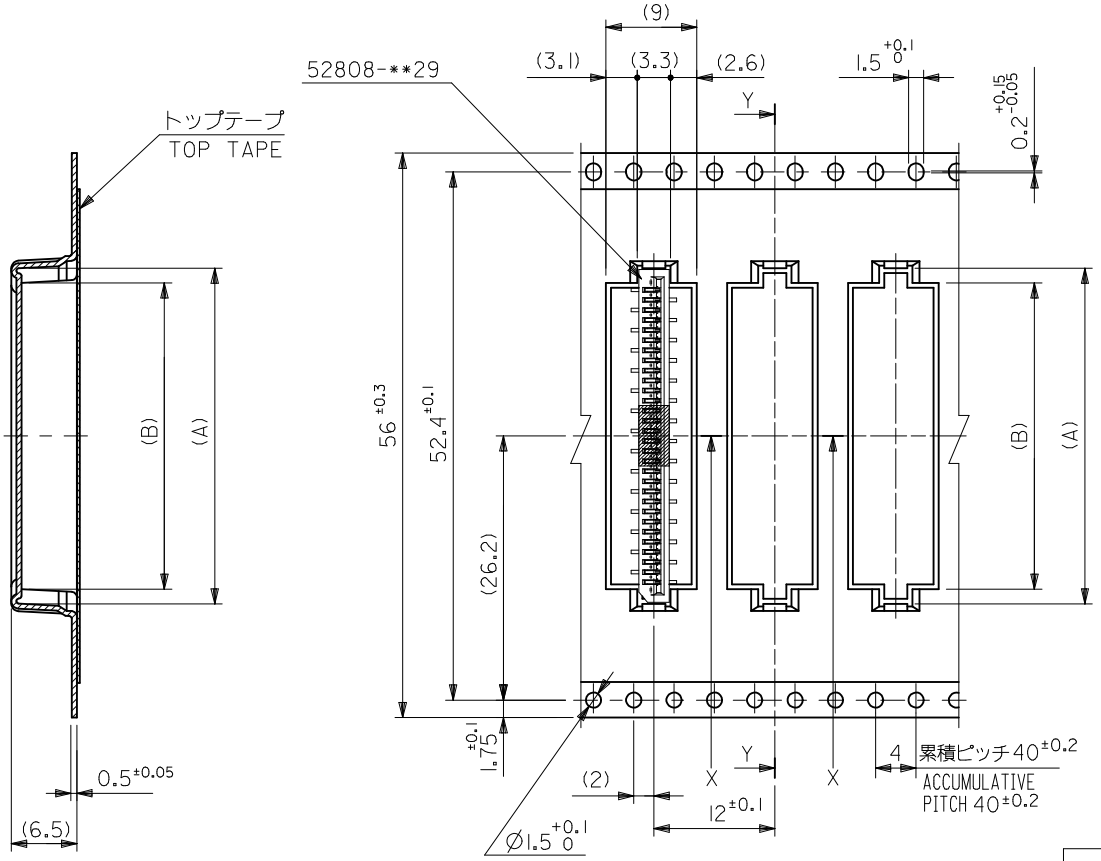


SECT:Y-Y

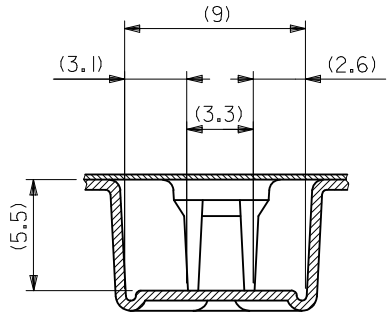


SECT:X-X

56mm幅キャリアテープ

56mm WIDTH CARRIER TAPE

| | | | | | | |
|---|---|---|---|---|---|---|
| 56 | 61.4 | 57.4 | 30.4<br>29.4 | 33.3<br>32.3 | 52808-3071<br>52808-2971 | 30<br>29 |
| キャリアテープ幅 CARRIER TAPE WIDTH | D | C | (B) | (A) | MATERIAL NO. | 極数 CKT. |
| MODEL NO. | | | 52808-**71 | | | |

SEE SHEET 1 OF 6

EC NO: J2015-0830 2014/12/18

DRWN:NASANUMA 2015/02/06

CH'KD:KTAKAHASHI 2015/02/23

APPR:YNOGAWA

DESCRIPTION

REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | | | | |
|---|---|---|---|---|
| 0.25 | UNDER | | UNDER | ±0.03 |
| 0.25 | OVER | 0.5 | UNDER | ±0.05 |
| 0.5 | OVER | 1.0 | UNDER | ±0.1 |
| 1.0 | OVER | 10 | UNDER | ±--- |
| 10 | OVER | 30 | UNDER | ±--- |
| 30 | OVER | | | ±--- |
| ANGULAR | | ±--- ° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY

SCALE: ---

DESIGN UNITS: METRIC

THIRD ANGLE PROJECTION

DRAWN BY: MNINOMIYA DATE: 2004/02/09

CHECKED BY: KTOJO DATE: 2004/02/09

APPROVED BY: DATE:

TITLE: 1.0 FFC CONN NON ZIF SMT ST WITH TAPE EMBSTP PKG -LEAD FREE-

molex

MATERIAL NO.: SEE CHART

DOCUMENT NO.: SD-52808-026

SHEET NO.: 6 OF 6

SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION