

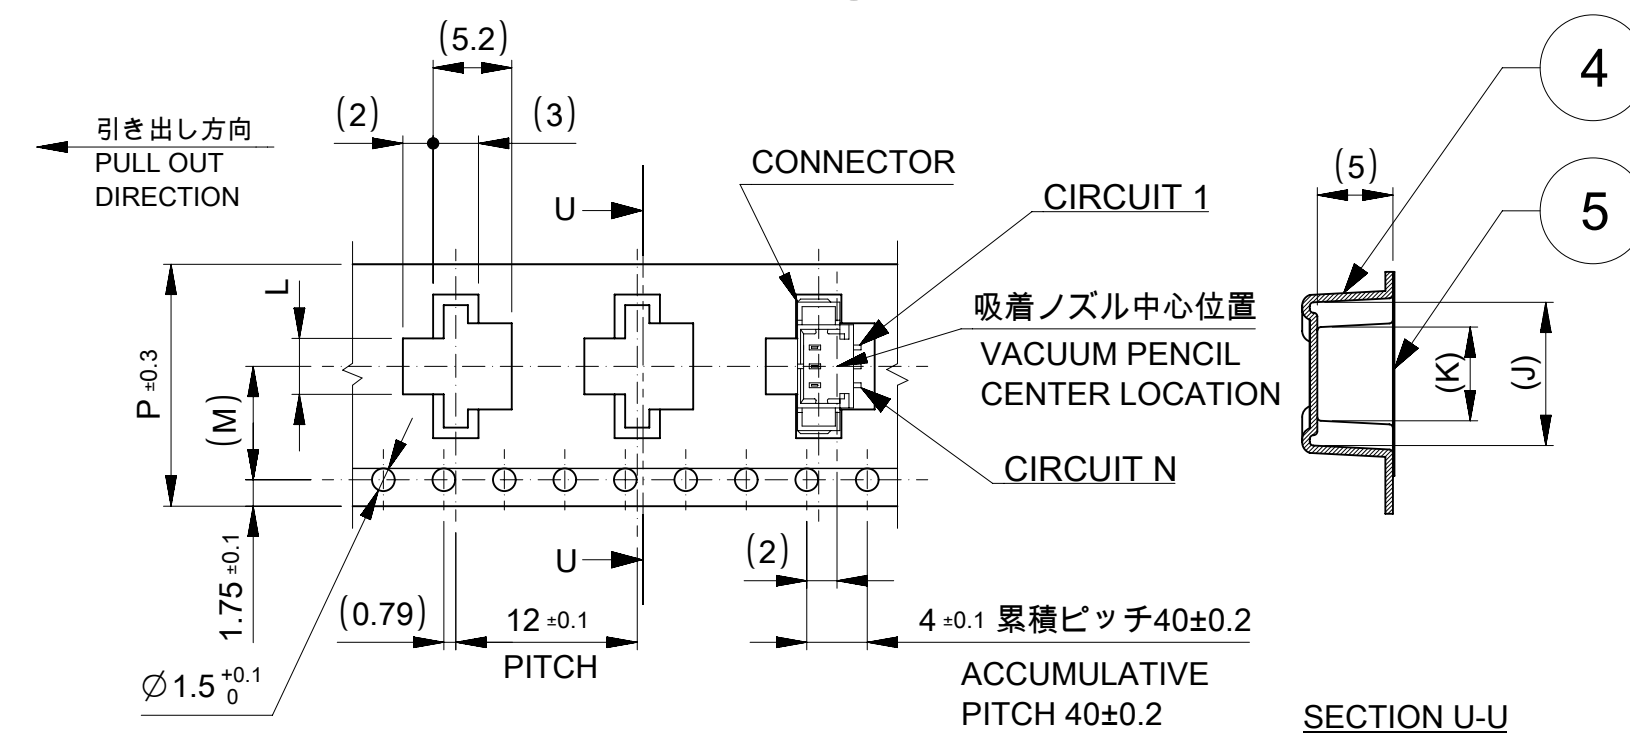


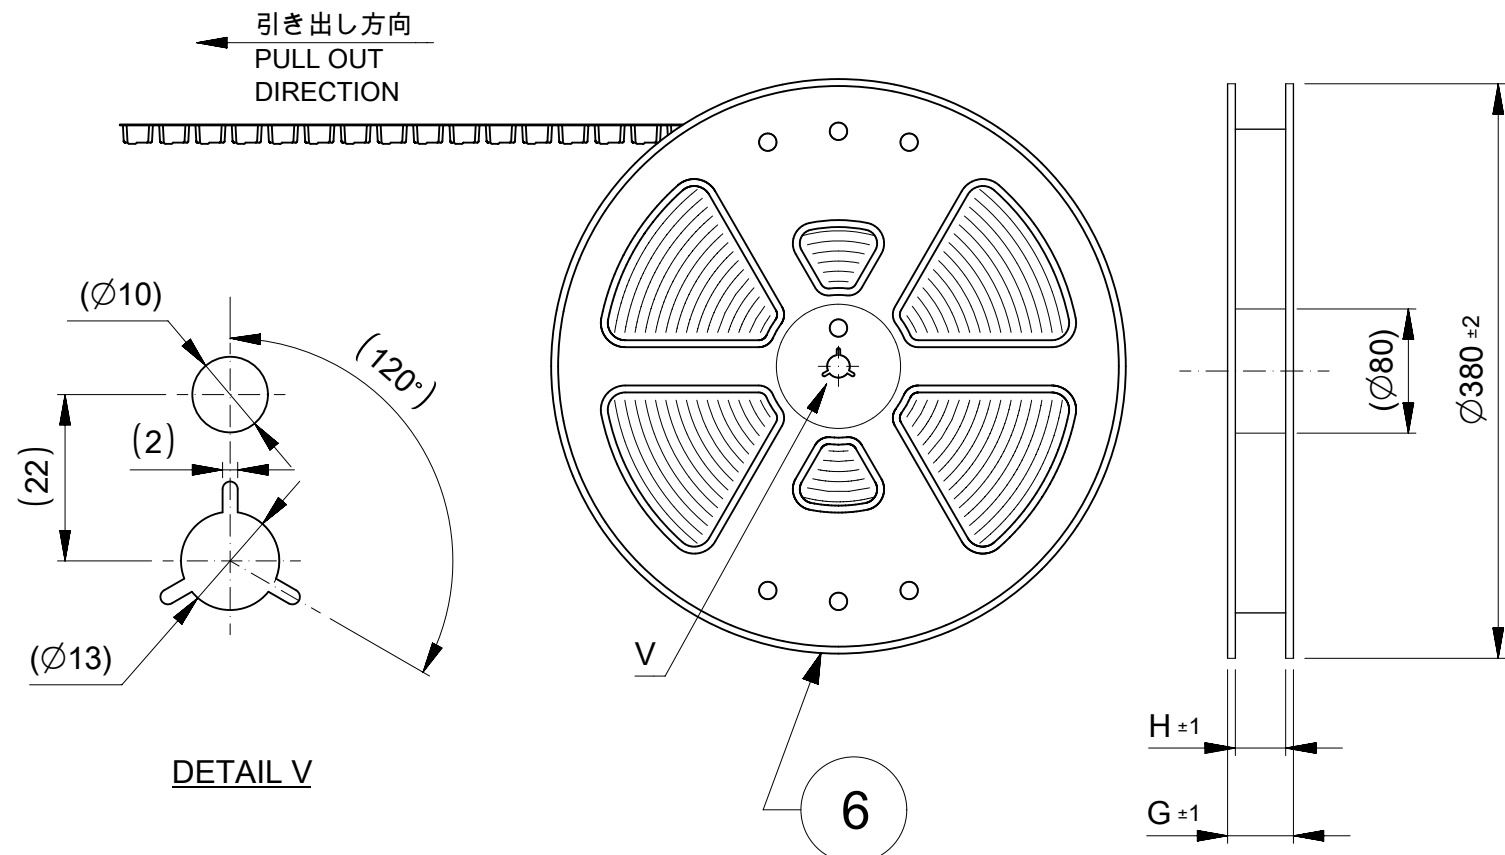


16mm幅(2~3極用) および24mm幅(4~10極用)キャリアテープ
16mm (FOR 2-3 CIRCUIT) OR 24mm (FOR 4-10 CIRCUIT) WIDTH CARRIER TAPE

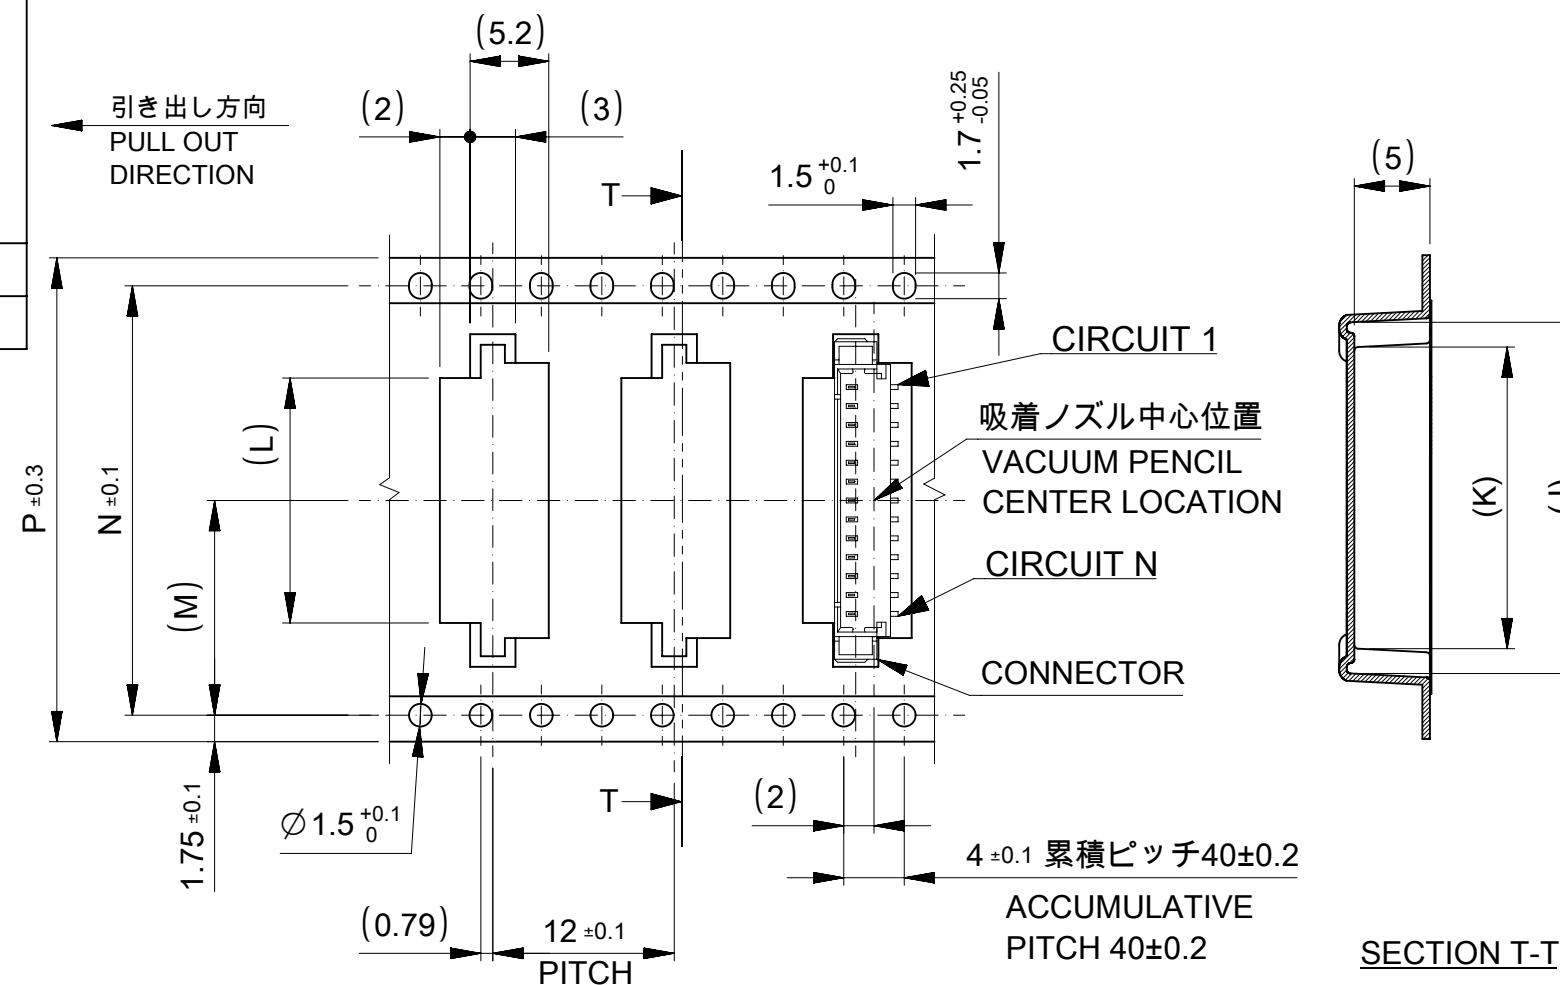

32mm幅(11~13極用) および44mm幅(13~15極用)キャリアテープ
32mm (FOR 11-13 CIRCUIT) OR 44mm (FOR 13-15 CIRCUIT) WIDTH CARRIER TAPE

NOTES

10. 梱包数量 : 1400個/リール
NUMBER OF CONNECTOR : 1400PCS / REEL
11. リードテープ長さ
LEAD TAPE LENGTH

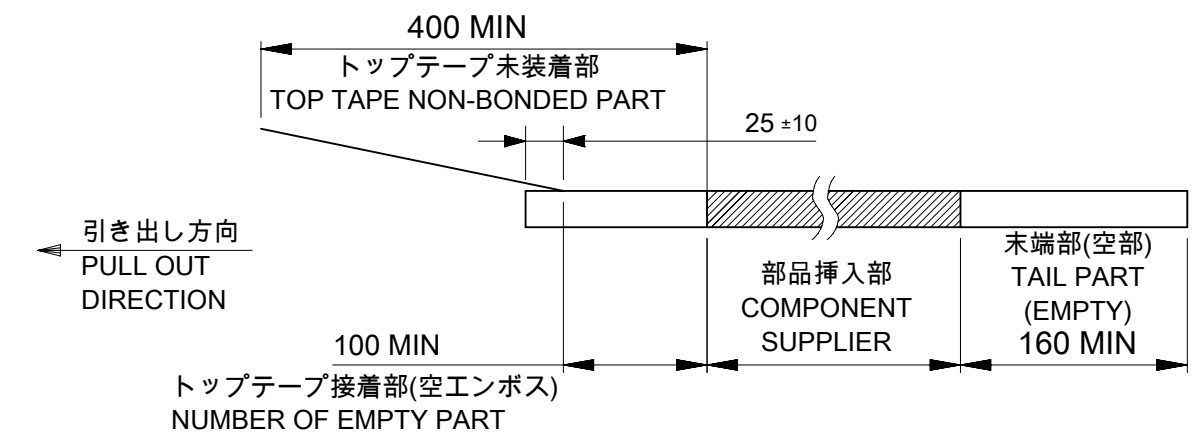

- △12. 材料：TABLE 2 参照
MATERIAL：REFER TO TABLE 2

13. トップテープの剥離強度はIEC60286-3に準拠
TOP TAPE PELING FORCE IS DEFINED BY IEC60286-3.

14. 本製品は乾燥剤入り、ハイバリア梱包仕様による納品となります。
THIS PRODUCT IS DELIVERED IN A HIGH BARRIER PACKAGE WITH DESICCANT.

12 TABLE 2


番号 NO.	部品 PART	材質 MATERIAL
④	エンボステープ EMBOSSSED TAPE	MXL生産分：ポリプロピレン(PP) PROCEED BY MXL: POLYPROPYLENE(PP) MXK生産分：ポリスチレン(PS) PROCEED BY MXK: POLYSTYRENE(PS)
⑤	トップテープ TOP TAPE	ポリエチレンテレフタレート(PET)、その他 POLYETHYLENE TEREPHTHALATE(PET), OTHER
⑥	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED >

44	40.4	20.2	18.7	20.8	24.5	45.4	49.4	15
			17.45	19.55	23.25			14
32	28.4	14.2	16.2	18.3	22	33.4	37.4	13
			14.95	17.05	20.75			12
			13.7	15.8	19.5			11
24	--	11.5	12.45	14.55	18.25	25.4	29.4	10
			11.2	13.3	17			9
			9.95	12.05	15.75			8
			8.7	10.8	14.5			7
			7.45	9.55	13.25			6
			6.2	8.3	12			5
			4.95	7.05	10.75			4
16	--	7.5	3.7	5.8	9.5	17.4	21.4	3
			2.45	4.55	8.25			2
キャリアテープ幅 p CARRIER TAPE WIDTH p	N	M	L	K	J	H	G	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex		
mm	NTS								
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 744677 DRWN: QHE31 2022/06/13 CHK'D: AIDA 2023/07/24 APPR: MARAI 2023/07/24 INITIAL REVISION: DRWN: QHE31 2020/08/03 APPR: KOMURAKAMI 2021/05/27			PICOBLADE 1.25 HEADER ASSY SMT VERTICAL GOLD PLATING TYPE				
ANGULAR TOL ± 3.0 °					PRODUCT CUSTOMER DRAWING				
4 PLACES ± 0.2	DOCUMENT NUMBER				DOC TYPE	DOC PART	REVISION		
3 PLACES ± 0.2	533980002-SD				PSD	000	B		
2 PLACES ± 0.2	THIRD ANGLE PROJECTION				MATERIAL NUMBER	CUSTOMER		SHEET NUMBER	
1 PLACE ± 0.2	DRAWING		SERIES	SEE CHART OF SHEET3		GENERAL		3 OF 4	
0 PLACES ± 0.2	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A2-SIZE		53398				

△15 発注番号
ORDER NUMBER

53398*0**

	番号	接点部 金めっき厚 CONTACT GOLD PLATING THICKNESS
	4	FLASH
	5	0.38 micro-meters MIN

B	533985015	533984015	15		
	533985014	533984014	14		
	533985013	533984013	13		
	533985012	533984012	12		
	533985011	533984011	11		
	533985010	533984010	10		
	533985009	533984009	9		
	533985008	533984008	8		
	533985007	533984007	7		
	533985006	533984006	6		
	533985005	533984005	5		
	533985004	533984004	4		
	533985003	533984003	3		
	533985002	533984002	2		
	A	GOLD PLATING THICKNESS 0.38micro-meters MIN	GOLD PLATING THICKNESS FLASH		極数 CIRCUIT
		発注番号 ORDER NO.			
梱包形態：エンボス梱包					
PACKAGING：EMBOSSD TAPE AND REEL					
DOCUMENT STATUS		P1	RELEASE DATE	2023/07/24	

