

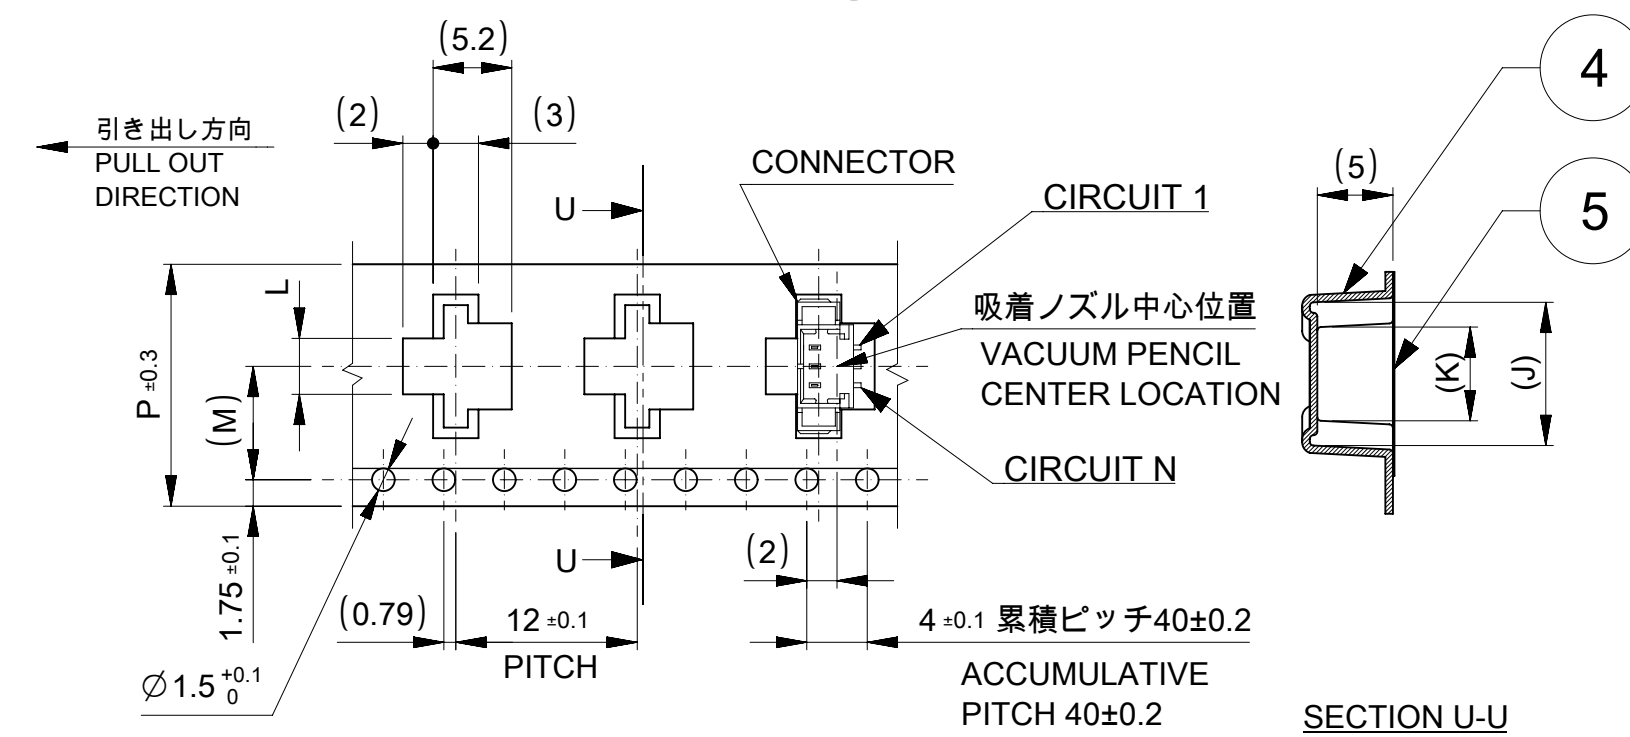


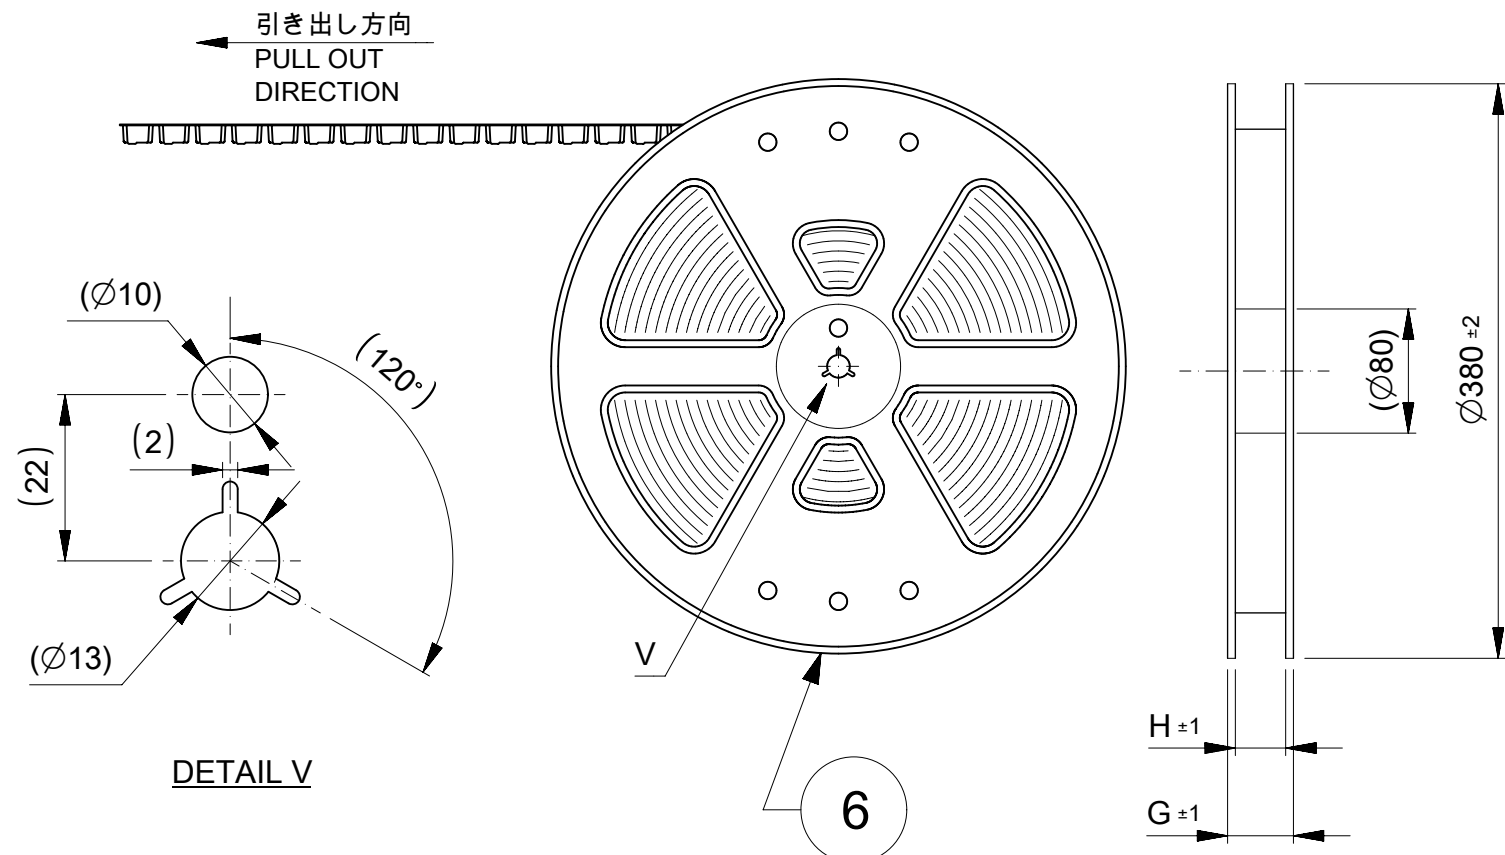


16mm幅(2~3極用) および24mm幅(4~10極用)キャリアテープ
16mm (FOR 2-3 CIRCUIT) OR 24mm (FOR 4-10 CIRCUIT) WIDTH CARRIER TAPE

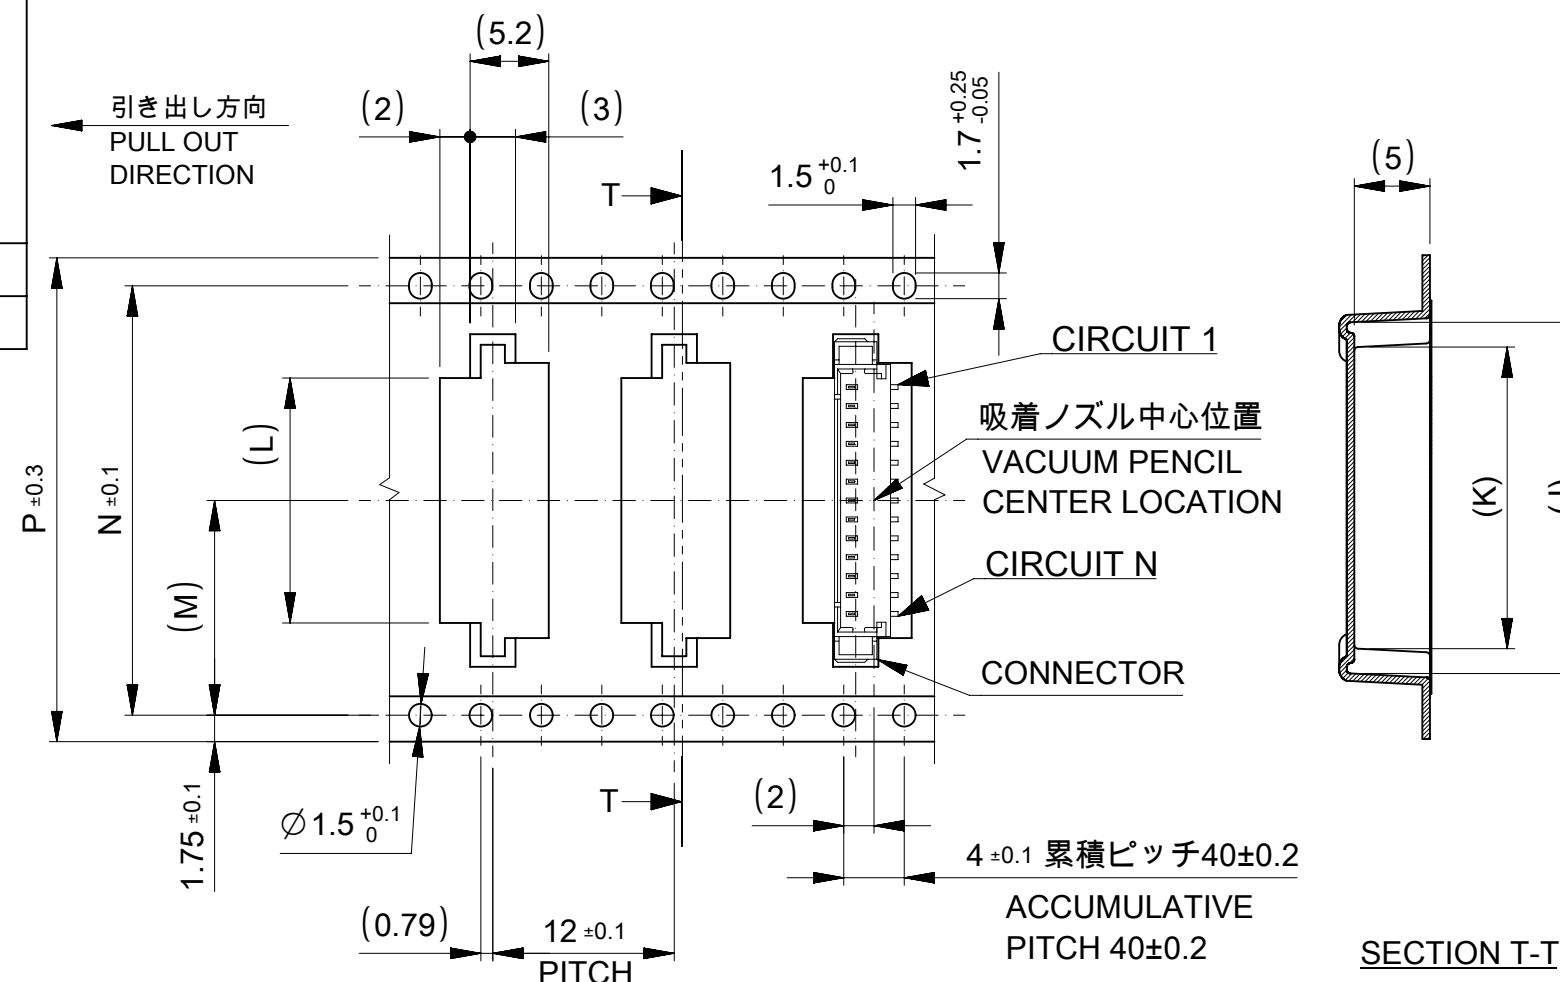

32mm幅(11~13極用) および44mm幅(13~15極用)キャリアテープ
32mm (FOR 11-13 CIRCUIT) OR 44mm (FOR 13-15 CIRCUIT) WIDTH CARRIER TAPE

NOTES

10. 梱包数量 : 1400個/リール
NUMBER OF CONNECTOR : 1400PCS / REEL
11. リードテープ長さ
LEAD TAPE LENGTH

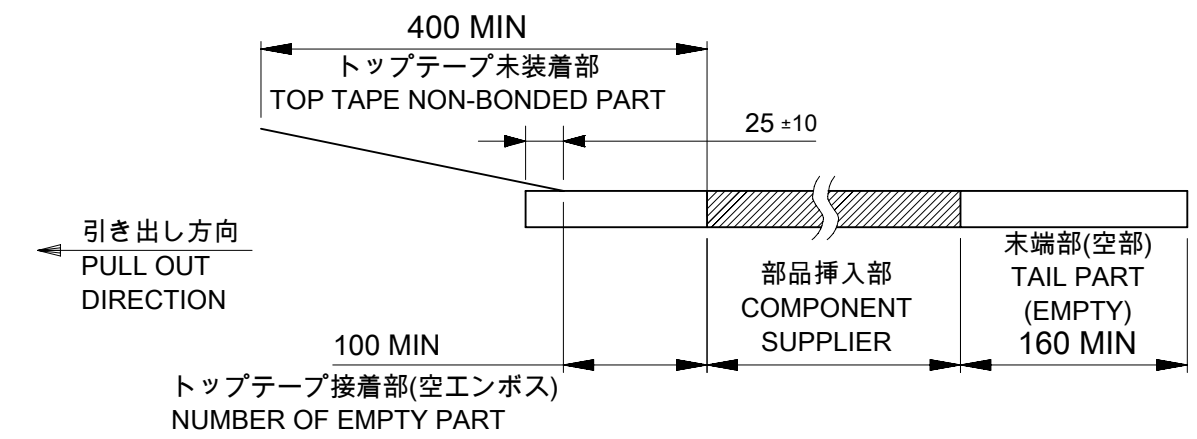

- △12. 材料：TABLE 2 参照
MATERIAL：REFER TO TABLE 2


13. トップテープの剥離強度はIEC60286-3に準拠
TOP TAPE PELING FORCE IS DEFINED BY IEC60286-3.

14. 本製品は乾燥剤入り、ハイバリア梱包仕様による納品となります。
THIS PRODUCT IS DELIVERED IN A HIGH BARRIER PACKAGE WITH DESICCANT.

12 TABLE 2

番号 NO.	部品 PART	材質 MATERIAL
④	エンボステープ EMBOSSSED TAPE	MXL生産分：ポリプロピレン(PP) PROCEED BY MXL: POLYPROPYLENE(PP) MXK生産分：ポリスチレン(PS) PROCEED BY MXK: POLYSTYRENE(PS)
⑤	トップテープ TOP TAPE	ポリエチレンテレフタレート(PET)、その他 POLYETHYLENE TEREPHTHALATE(PET), OTHER
⑥	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED >

44	40.4	20.2	18.7	20.8	24.5	45.4	49.4	15
			17.45	19.55	23.25			14
32	28.4	14.2	16.2	18.3	22	33.4	37.4	13
			14.95	17.05	20.75			12
			13.7	15.8	19.5			11
24	--	11.5	12.45	14.55	18.25	25.4	29.4	10
			11.2	13.3	17			9
			9.95	12.05	15.75			8
			8.7	10.8	14.5			7
			7.45	9.55	13.25			6
			6.2	8.3	12			5
			4.95	7.05	10.75			4
16	--	7.5	3.7	5.8	9.5	17.4	21.4	3
			2.45	4.55	8.25			2
キャリアテープ幅 p CARRIER TAPE WIDTH p	N	M	L	K	J	H	G	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)															
ANGULAR TOL								±		3.0 °					
4 PLACES		±						0.2		EC NO: 744677 DRWN: QHE312022/06/13 CHK'D: AIDA2023/07/24 APPR: MARAI2023/07/24					
3 PLACES		±		0.2											
2 PLACES		±		0.2											
1 PLACE		±		0.2		INITIAL REVISION: DRWN: QHE312020/08/03 APPR: KOMURAKAMI2021/05/27				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
0 PLACES		±		0.2						533980002-SD		PSD	000	B	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A2-SIZE		53398		SEE CHART OF SHEET3		GENERAL		3 OF 4	

</

△

2

適合製品および各種仕様書

APPLICABLE PRODUCTS AND SPECIFICATIONS

梱包仕様書 PACKING SPECIFICATION	PART NUMBER				SPECIFICATION NUMBER	
	53398****				SPK-53398-002	
適合嵌合相手 MATE WITH	HOUSING		CRIMP TREMINAL			
	51021****	WIRE SIZE (AWG)	GOLD PLATING THICKNESS		PART NUMBER	
		#28-32	FLASH		500588020	
			0.38 micro-meters		500588025	
		#26-28	FLASH		500798020	
			0.38 micro-meters		500798025	
製品仕様書 PRODUCT SPECIFICATION	510210001-PS PS 000					
アプリケーション仕様書 (取扱説明書) APPLICATION SPECIFICATION	510210000-AS PS 000					

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE	CURRENT REV DESC:				molex							
mm	NTS												
GENERAL TOLERANCES (UNLESS SPECIFIED)						PICOBLADE 1.25 HEADER ASSY SMT VERTICAL GOLD PLATING TYPE							
ANGULAR TOL	±	3.0 °	EC NO: 744677			PRODUCT CUSTOMER DRAWING							
4 PLACES	±	0.2	DRWN: QHE31										
3 PLACES	±	0.2	CHK'D: AIDA										
2 PLACES	±	0.2	APPR: MARAI										
1 PLACE	±	0.2	INITIAL REVISION:			DOCUMENT NUMBER		DOC TYPE	DOC PART				
0 PLACES	±	0.2	DRWN: QHE31			533980002-SD		PSD	000				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER					
					A2-SIZE	53398		GENERAL					
								SHEET NUMBER					
								4 OF 4					

DOCUMENT STATUS	P1	RELEASE DATE	2023/07/24	10:03:44
-----------------	----	--------------	------------	----------

4

13

12

11

10

9

8

7

6

5

4

3

2

1

A

B

C

D

E

F

G

H