
3mm
LED CBI® Circuit Board Indicator
Bi-level

Dialight

553-xxxx-300

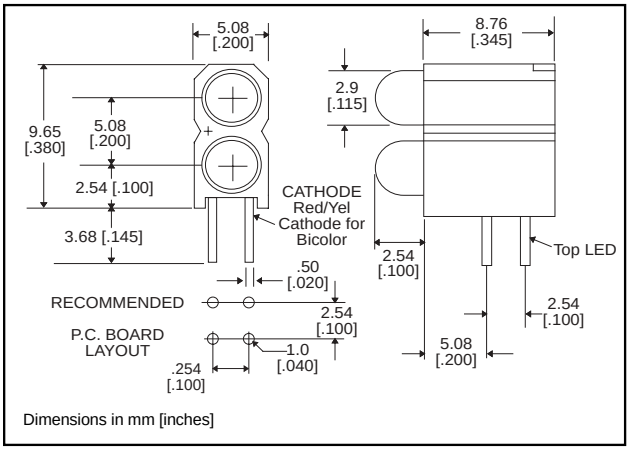

Standard Polarity shown in drawing: Cathode right

Features

- Multiple CBIs form horizontal LED arrays on 5.08mm (0.200") center-lines.
- High Contrast, UL 94 V-0 rated, black housing
- Oxygen index: 32%
- Polymer content: PBT, 0.405 g
- Housing stand-offs facilitate PCB cleaning
- Solderability per MIL-STD-202F, method 208F
- LEDs are safe for direct viewing per IEC 825-1, EN-60825-1
- Compatible with:
  553-xxxx-306 Bi-Level Array


Tolerance note: As noted, otherwise:

- LED Protrusion: ±0.04 mm [±0.016]
- CBI Housing: ±0.02mm[±0.008]

Custom Combinations

• Contact factory for information on custom bi-level arrays and color combinations.

PART NUMBER ORDERING CODE

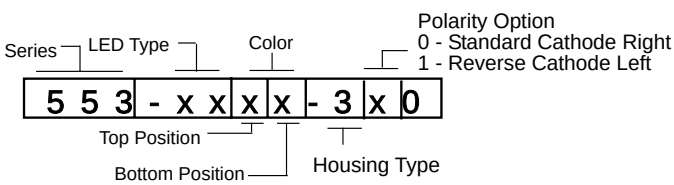

Color = 0) Blank 1) Red or Red/Green Bicolor 2) Green 3) Yellow 4) Yellow/Green Bicolor 7) Orange 8) Blue

PART NO.	COLOR*
HIGH EFFICIENCY - LED TYPE 01	
553-0111-300	Red
553-0122-300	Green
553-0133-300	Yellow
553-0177-300	Orange
553-0188-300	Blue[3] NEW
LOW CURRENT - LED TYPE 02	
553-0211-300	Red
553-0222-300	Green
553-0233-300	Yellow
RESISTOR 5 VOLTS - LED TYPE 03	
553-0311-300	Red
553-0322-300	Green
553-0333-300	Yellow
BI-COLOR - LED TYPE 07	
553-0711-300	Red/Green
553-0744-300	Yellow/Green
NON-DIFFUSED - LED TYPE 22	
553-2211-300	Red
553-2222-300	Green
553-2233-300	Yellow

* Top-Bottom LED

REVERSE POLARITY OPTION AVAILABLE
See Part Number Ordering Code below.



Typical Operating Characteristics (T_A=25°C)

See LED data sheet for additional information

See page 4-70 and 4-71 for Reference Only LED Drive Circuit Examples. See page 4-72 for Pin Out

HIGH EFFICIENCY

Part Number	Color	Peak Wavelength nm	I_V mcd	V_F Volts	Test Current (mA)	Viewing Angle $2\Theta_{½}$	LED Data sheet	Page #
553-0111-300	Red	650	10	2	10	45°	521-9427	4-64
553-0122-300	Green	563	16	2.1	10	45°	521-9408	4-64
553-0133-300	Yellow	585	6.3	2.1	10	45°	521-9428	4-64
553-0177-300	Orange	600	7	2.2	10	60°	521-9498	4-58
553-0188-300	Blue	428	12	3.5	10	70°	521-9831	4-57

LOW CURRENT

Part Number	Color	Peak Wavelength nm	I_V mcd	V_F Volts	Test Current (mA)	Viewing Angle $2\Theta_{½}$	LED Data sheet	Page #
553-0211-300	Red	635	1.6	1.7	2	60°	521-9324	4-60
553-0222-300	Green	565	1.6	1.9	2	60°	521-9326	4-60
553-0233-300	Yellow	585	1.6	1.8	2	60°	521-9325	4-60

INTEGRAL RESISTOR, 5 VOLTS

Part Number	Color	Peak Wavelength nm	I_V mcd	Test Voltage	Forward Current (mA)	Viewing Angle $2\Theta_{½}$	LED Data sheet	Page #
553-0311-300	Red	635	29	5	10	60°	521-9215	4-59
553-0322-300	Green	565	19	5	10	60°	521-9323	4-59
553-0333-300	Yellow	585	12.6	5	10	60°	521-9322	4-59

BI-COLOR

Part Number	Color	Peak Wavelength nm	I_V mcd	V_F Volts	Test Current (mA)	Viewing Angle $2\Theta_{½}$	LED Data sheet	Page #
553-0711-300	Red/Green	635/565	4.7/10	2/2.1	10	50°	521-9459	4-63
553-0744-300	Yellow/Green	585/565	4.3/6.3	2.1*/2.1*	10	80°	521-9478	4-62

** I_F = 20mA*

NON-DIFFUSED

Part Number	Color	Peak Wavelength nm	I_V mcd	V_F Volts*	Test Current (mA)	Viewing Angle $2\Theta_{½}$	LED Data sheet	Page #
553-2211-300	Red	635	29	2	10	45°	521-9432	4-61
553-2222-300	Green	565	50	2.1	10	45°	521-9430	4-61
553-2233-300	Yellow	585	20	2.1	10	45°	521-9431	4-61


** I_F = 20mA*

3mm Discrete LED
Tinted, Diffused

NEW

Dialight

521-9831

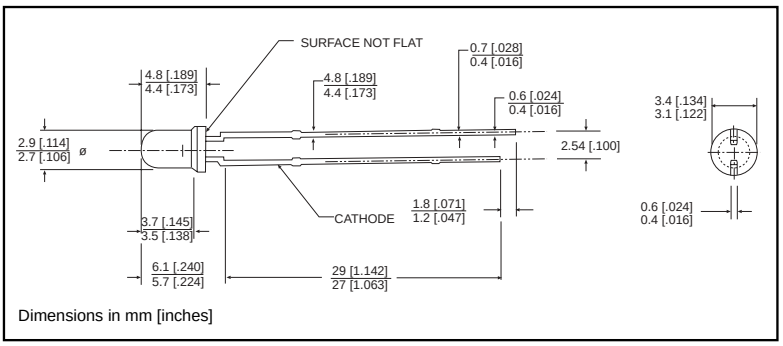

Dimensions in mm [inches]

PART NO.	COLOR
521-9831	Blue [3]

MOUNTING CLIP: 515-0006
located on page 4-65

[3]



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

4


ABSOLUTE MAXIMUM RATINGS (T_A=25°C)	Blue **-9831**
Power Dissipation (mW)	100
Forward Current (mA)	20
Derating (mA/°C) *From 55°C*	.44
Operating Temperature (°C)	-40/+100
Storage Temperature (°C)	-40/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS (T_A=25°C)		Blue **-9831**
Luminous Intensity (mcd)	Min.	6.3
I_F=10mA	Typical	12
Peak Wavelength (nm)	Typical	428
λ Peak		
Viewing Angle (2Θ½)	Typical	70°
Forward Voltage (V)	Typical	3.5
I_F=10mA	Max.	4.2
Reverse Voltage (V) IR=10µA	Min.	3

Θ½ is the off axis angle at which the luminous intensity is half the axial luminous intensity

3mm Discrete LED
High Efficiency
Diffused 521-9210, -9211, -9216, -9498, -9636

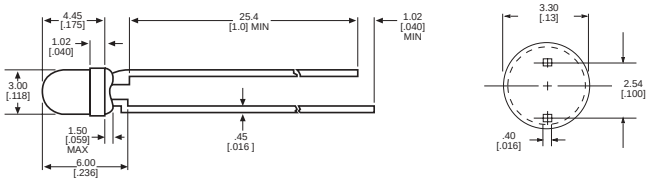

short lead cathode all colors except 521-9636 Red.
For 521-9636 Red, short lead is anode.

Dimensions in mm [inches]

PART NO.	COLOR
521-9210	Green
521-9211	Yellow
521-9216	Red
521-9498	Orange
521-9636	Red

NEW

MOUNTING CLIP: 515-0006
located on page 4-65

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)	Green **-9210**	Yellow **-9211**	Red **-9216**	Orange **-9498**	Red **-9636**
Power Dissipation (mW)	100	60	100	135	100
Forward Current (mA)	30	20	30	25	40
Derating (mA/°C) *From 50°C* [1] from 25°C	.4	.25	.4	.5	.5[1]
Operating Temperature (°C)	-55/+100	-55/+100	-55/+100	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from body				

Solder Adherence per MIL-STD-202E, Method 208C


OPERATING CHARACTERISTICS (T_A=25°C)		Green **-9210**	Yellow **-9211**	Red **-9216**	Orange **-9498**	Red **-9636**
Luminous Intensity (mcd)	Min.	4.7	7.4	7.4	3.4	8.7[1]
I_F=10mA [1] I_F=20mA	Typical	12.6	10	10	7	48[1]
Peak Wavelength (nm) λ Peak	Typical	565	585	635	600	660
Viewing Angle (2Θ ½)	Typical	60°	60°	60°	60°	60°
Forward Voltage (V)	Typical	2.1[1]	2.1[1]	2[1]	2.2	1.8[1]
I_F=10mA [1] I_F=20mA	Max.	2.8[1]	2.8[1]	2.8[1]	3	2.4[1]
Reverse Voltage (V), I_R=100µA	Max.	5	5	5	5	4

Θ ½ *is the off axis angle at which the luminous intensity is half the axial luminous intensity*

3mm Discrete LED
Integral Resistor, 5V
Diffused

Dialight

521-9215, -9322, -9323

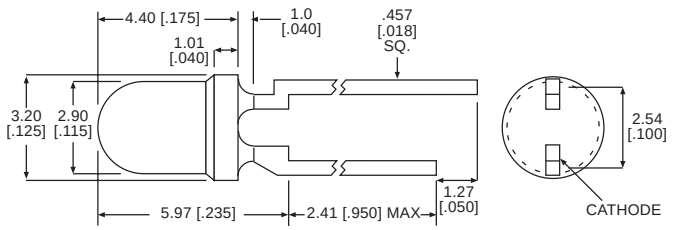

Dimensions in mm [inches]

PART NO.	COLOR
521-9215	Red
521-9322	Yellow
521-9323	Green

MOUNTING CLIP: 515-0006
located on page 4-65

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)	Red **-9215**	Yellow **-9322**	Green **-9323**
Forward Voltage (V)	7.5	7.5	7.5
Derating (V/°C) *From 50°C*	.086	.086	.071
Operating Temperature (°C)	-40/+85	-40/+85	-20/+85
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		


Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS (T_A=25°C)		Red **-9215**	Yellow **-9322**	Green **-9323**
Luminous Intensity (mcd)	Min.	8.7	3.7	5.6
V_F=5V	Typical	29	12.6	19
Peak Wavelength (nm)	Typical	635	585	565
λ Peak				
Viewing Angle (2Θ½)	Typical	60°	60°	60°
Forward Current (mA)	Typical	10	10	10
V_F=5V	Max.	20	20	20
Reverse Voltage (V), I_R=100µA	Min.	5	5	5

Θ½ *is the off axis angle at which the luminous intensity is half the axial luminous intensity*

3mm Discrete LED
Low Current
Diffused

521-9324, -9325, -9326

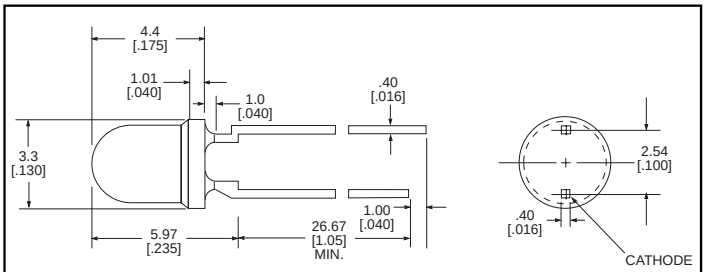

Dimensions in mm [inches]

PART NO.	COLOR
521-9324	Red
521-9325	Yellow
521-9326	Green

MOUNTING CLIP: 515-0006
located on page 4-65

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)	Red **-9324**	Yellow **-9325**	Green **-9326**
Power Dissipation (mW)	20	20	20
Forward Current (mA)	7	7	7
Derating (mA/°C) *From 90°C*	.7	.7	.7
Peak Current (mA) *Pulse width = 10 µs*	500	500	500
Operating Temperature (°C)	-55/+100	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		

Solder Adherence per MIL-STD-202E, Method 208C


OPERATING CHARACTERISTICS (T_A=25°C)		Red **-9324**	Yellow **-9325**	Green **-9326**
Luminous Intensity (mcd)	Min.	1	1	1
I_F=2mA	Typical	1.6	1.6	1.6
Peak Wavelength (nm) λ Peak	Typical	635	585	565
Viewing Angle (2Θ ½)	Typical	60°	60°	60°
Forward Voltage (V)	Typical	1.7	1.8	1.9
I_F=2mA	Max.	2.2	2.7	2.2
Reverse Voltage (V), I_R=50µA	Min.	5	5	5

Θ ½ *is the off axis angle at which the luminous intensity is half the axial luminous intensity*

3mm Discrete LED
High Efficiency
Tinted, Non-Diffused

Dialight

521-9430, -9431, -9432

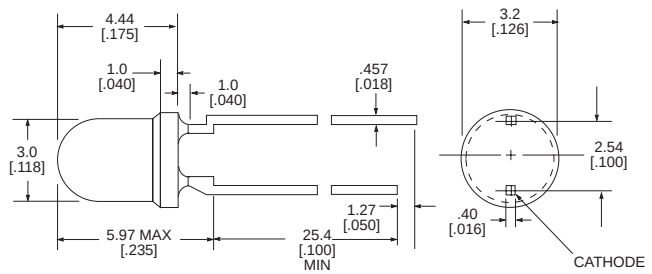

Dimensions in mm [inches]

PART NO.	COLOR
521-9430	Green
521-9431	Yellow
521-9432	Red

MOUNTING CLIP: 515-0006
located on page 4-65

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)	Green **-9430**	Yellow **-9431**	Red **-9432**
Power Dissipation (mW)	100	60	100
Forward Current (mA)	30	20	30
Derating (mA/°C) *From 50°C*	.4	.25	.4
Peak Current (mA) *Pulse width = 100µs*	120	80	120
Operating Temperature (°C)	-55/+100	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		

Solder Adherence per MIL-STD-202E, Method 208C


OPERATING CHARACTERISTICS (T_A=25°C)		Green **-9430**	Yellow **-9431**	Red **-9432**
Luminous Intensity (mcd)	Min.	32	10	8.7
I_F=10mA	Typical	50	20	29
Peak Wavelength (nm) λ Peak	Typical	565	585	635
Viewing Angle (2Θ½)	Typical	45°	45°	45°
Forward Voltage (V)	Typical	2.1	2.1	2
I_F=20mA	Max.	2.8	2.8	2.8

Θ½ *is the off axis angle at which the luminous intensity is half the axial luminous intensity*

3mm Discrete LED
Bi-Color
Non-Tinted, Diffused

Dialight

521-9478, -9628, -9768

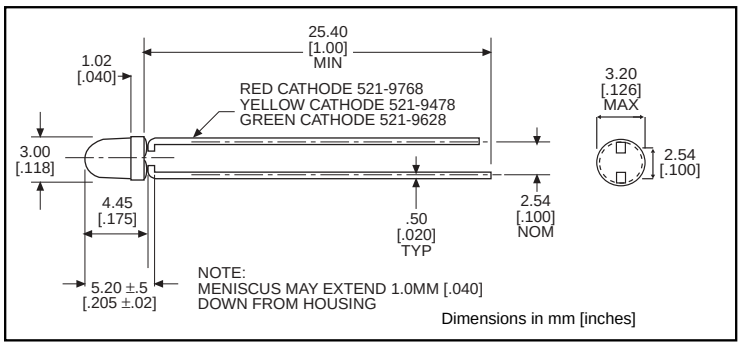

PART NO.	COLOR
521-9478	Yellow/Green
521-9628	Red/Green
521-9768	Red/Yellow

MOUNTING CLIP: 515-0006
located on page 4-65

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)	Yellow/Green **-9478**	Red/Green **-9628**	Red/Yellow **-9768**
Power Dissipation (mW)	60/100	140/100	100/60
Forward Current (mA)	20/30	40/30	30/20
Derating (mA/°C) *From 25°C [1] From 50°C*	.25[1]/.40[1]	.5/.4	.4[1]/.25[1]
Peak Current (mA) *Pulse width = 10µs*	80/120	200/120	120/80
Operating Temperature (°C)	-55/+100	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.66 mm from case		

Solder Adherence per MIL-STD-202E, Method 208C


OPERATING CHARACTERISTICS (T_A=25°C)		Yellow/Green **-9478**	Red/Green **-9628**	Red/Yellow **-9768**
Luminous Intensity (mcd)	Min.	2.5/2.5	3.7*/1.1*	1.7*/1.7*
I_F=10mA * I_F=20mA	Typical	4.3/6.3	12.6*/3.7*	5.6*/5.6*
Peak Wavelength (nm) λ Peak	Typical	585/565	660/565	630/585
Viewing Angle (2Θ ½)	Typical	80°	200°	80°
Forward Voltage (V)	Typical	2.1/2.1	1.8/2.1	2/2.1
I_F=20mA	Max.	2.8/2.8	2.4/2.8	2.8/2.8
Reverse Voltage (V) I_R=100ua	Min.	5	5	5

Θ ½ is the off axis angle at which the luminous intensity is half the axial luminous intensity

3mm Discrete LED
Bi-Color
Non-Tinted, Diffused

Dialight

521-9459

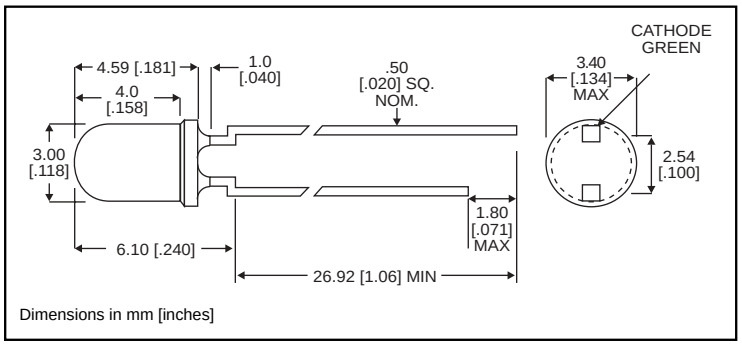

Dimensions in mm [inches]

PART NO.	COLOR
521-9459	Red/Green

MOUNTING CLIP: 515-0006
located on page 4-65

4

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)	Red/Green **-9459**
Power Dissipation (mW)	140
Forward Current (mA)	45
Derating (mA/°C) *From 25°C*	.6
Peak Current (mA) *Pulse width = 10µs*	1000
Operating Temperature (°C)	-55/+100
Storage Temperature (°C)	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case

Solder Adherence per MIL-STD-202E, Method 208C


OPERATING CHARACTERISTICS (T_A=25°C)		Red/Green **-9459**
Luminous Intensity (mcd)	Min.	2.5/3.7
I_F=10mA	Typical	4.7/10
Peak Wavelength (nm)	Typical	635/565
λ Peak		
Viewing Angle (2Θ½)	Typical	50°
Forward Voltage (V)	Typical	2/2.1
I_F=10mA	Max.	2.8/2.8

Θ ½ is the off axis angle at which the luminous intensity is half the axial luminous intensity

3mm Discrete LED
High Efficiency
Diffused

Dialight

521-94xx

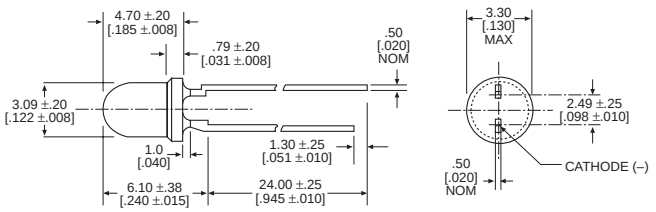

Dimensions in mm [inches]

TYPE	COLOR
521-9408	Green
521-9427	Red
521-9428	Yellow

MOUNTING CLIP: 515-0006
located on page 4-65

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)	Green **-9408**	Red **-9427**	Yellow **-9428**
Power Dissipation (mW)	75	60	60
Forward Current (mA)	25	20	20
Derating (mA/°C) *From 50°C*	.5	.5	.5
Peak Current (mA)	60	60	60
Operating Temperature (°C)	-25/+85	-25/+85	-25/+85
Storage Temperature (°C)	-30/+100	-30/+100	-30/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS (T_A=25°C)		Green **-9408**	Red **-9427**	Yellow **-9428**
Luminous Intensity (mcd)	Min.	5.6	3.6	2.2
I_F=10mA	Typical	16	10	6.3
Peak Wavelength (nm)	Typical	563	650	585
λ Peak				
Viewing Angle ($2\Theta_{1/2}$)	Typical	45°	45°	45°
Forward Voltage (V)	Typical	2.1	2	2.1
I_F=10mA	Max.	3	3	3
Reverse Voltage (V), I_R=10µA	Min.	3	3	3

$\Theta_{1/2}$ *is the off axis angle at which the luminous intensity is half the axial luminous intensity*