


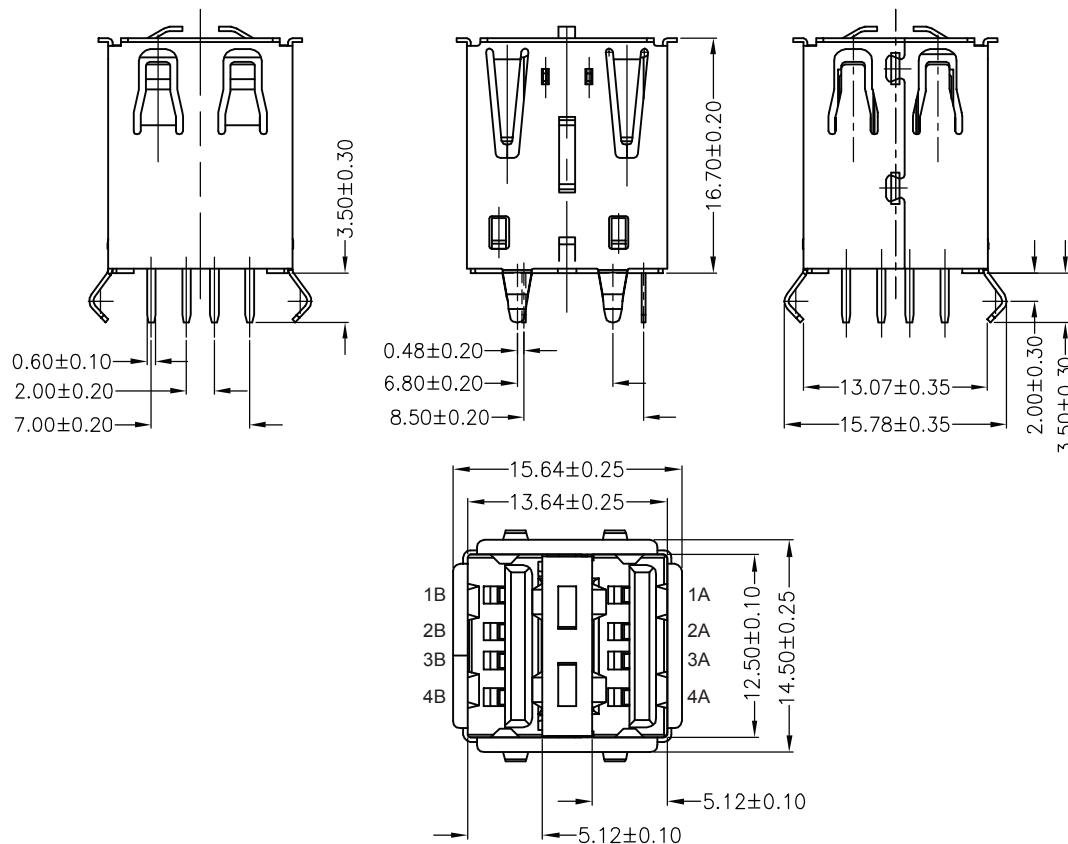

RECOMMENDED PCB LAYOUT TOL: ± 0.10
RECOMMENDED PCB THICKNESS : 1.6 mm

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PBT
FLAMMABILITY RATING: UL94-V0
COLOR: WHITE
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRASS Ni PLATED
QUALITY CLASS: 1500 MATING CYCLES

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO +105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5 A MAX
WORKING VOLTAGE: 30 VAC
INSULATOR RESISTANCE: >1000 MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC/MIN
CONTACT RESISTANCE: 20 mΩ MAX


STANDARD
UL CERTIFIED: E323964

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
TRAY

Pin NB.	Name
1	Vbus
2	D-
3	D+
4	GND

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = ± 0.2 .XX = ± 0.15		DESCRIPTION: DUAL USB 2.0 TYPE A VERTICAL	SIZE A4
L	25-JUL-16	PIN-OUT	AK					
K	23-DEC-15	PCN	AK	APPROVAL: NPr	UNIT: MM	WERI PART NO: 614 008 235 023		
J	01-SEP-15	TPK	AK		SCALE:			
I	09-AVR-15	PCB THICKNESS	QP		SHEET: 1/3			
H	27-OCT-14	REVIEW	QL		DRAW: AK			
REV	DATE	FILE	BY					

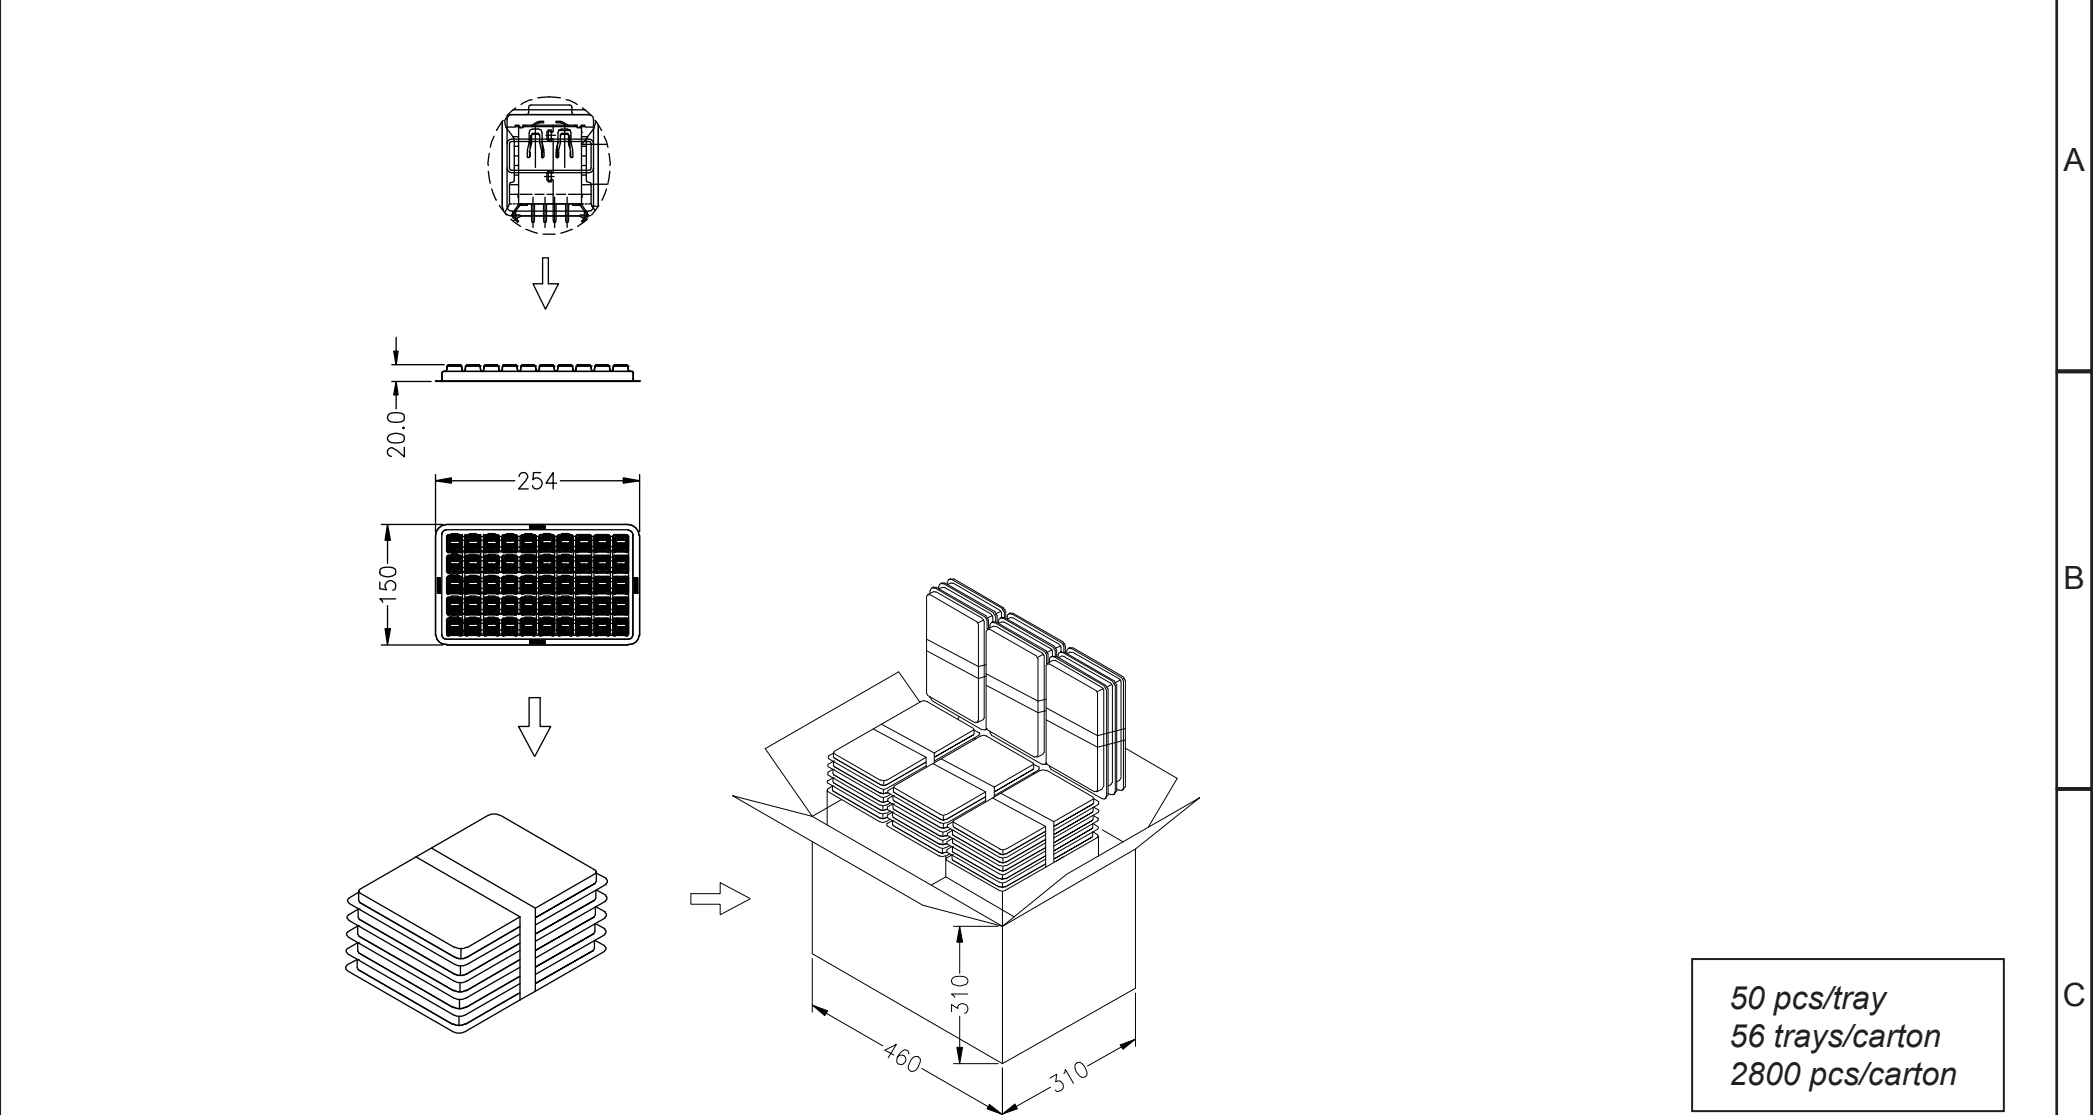

RoHS Compliant				PROJECTION:	GENERAL TOLERANCE .X = $\pm$_ 0.2 .XX = $\pm$_ 0.15			
				APPROVAL: NPr	UNIT: MM	DESCRIPTION: DUAL USB 2.0 TYPE A VERTICAL		SIZE A4
					SCALE:			
A					SHEET: 2/3	WERI PART NO: 614 008 235 023		
REV	DATE	FILE	BY		DRAW: AK			

