


| TOLERANCE UNLESS OTHERWISE SPECIFIED | |
|---|---|
| .X | ±0.25 |
| .XX | ±0.13 |
| .XXX | ±0.10 |


THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

| ISSUE NUMBER | |
|---|---|
| ORIGINAL | 1 |

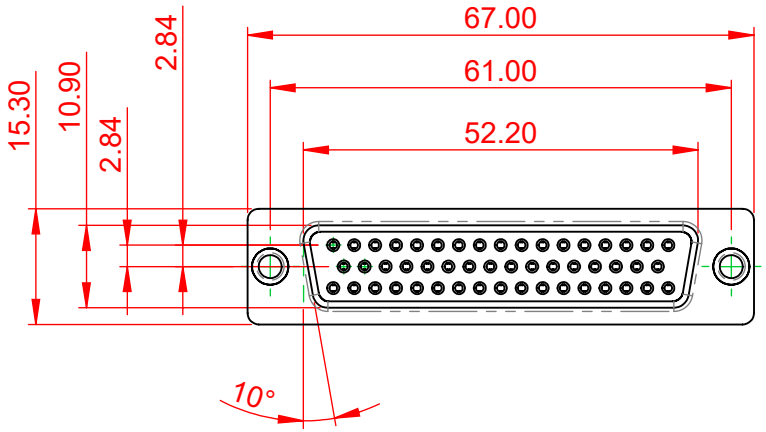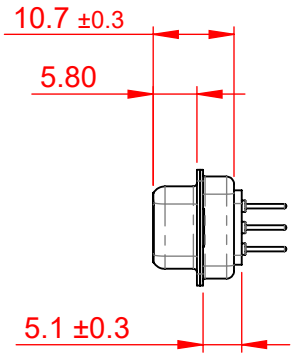

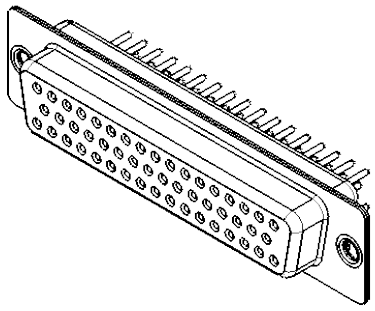


NOTES:

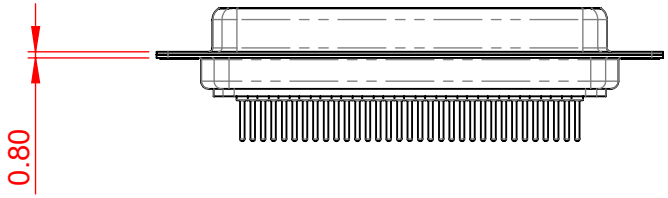MATERIAL:
HOUSING: BLUE THERMOPLASTIC POLYESTER, UL94V-0
SHELL: STEEL, TIN PLATED
CONTACT: COPPER ALLOY, 15µ GOLD PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

CURRENT RATING: 5A PER CONTACT
CONTACT RESISTANCE: 25mΩ MAX.
INSULATOR RESISTANCE: 5000MΩ min.
DIELECTRIC
WITHSTANDING VOLTAGE: 1000V AC rms

RoHS COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

# 628 SERIES D-SUB CONNECTOR

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

| | | | |
|---|---|---|---|
| SW REFERENCE NO.: | 628M ASSEMBLY | | |
| DRAWN: C.B | | DATE: AUG. 01/2018 | |
| CHECKED: | | DATE: | |
| SCALE: 1:1 | | SHEET 1 OF 1 | |
| DRAWING NUMBER: | 628-M50-321-LT1 | ISSUE | 1 |
| PART NUMBER: | 628-M50-321-LT1 | | |