


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274COLOR
BOOT: FLEXIBLE PVC. AVAILABLE IN TEN COLORS
CONTACT: STEEL
2. P/N: 9260COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: NICKEL PLATED BRASS.
CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-600/COLOR
18AWG TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
HANDS FREE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		
	DESCRIPTION	DATE	APPROVED

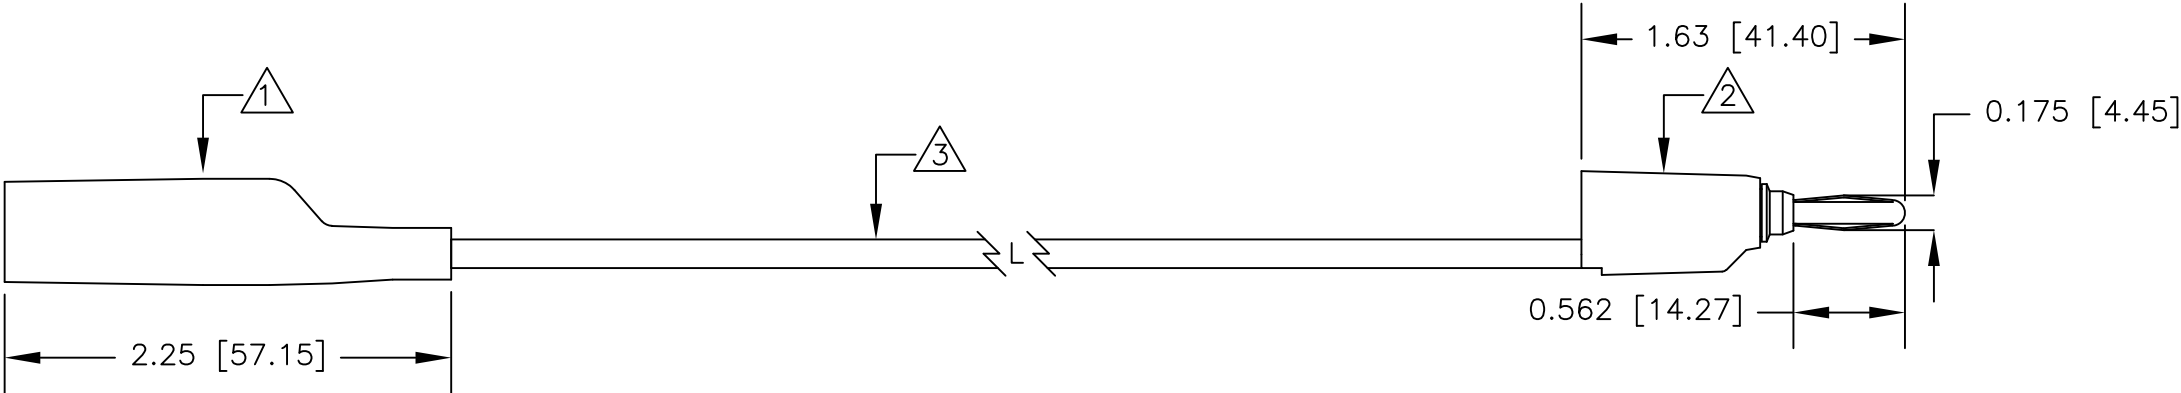

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK! DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.					
			APPROVALS	DATE						
				DRAWN	R.L.	5/13	DESCRIPTION STD ALLIGATOR CLIP (9274) TO STK BAN PLUG (9260)			
		MATERIAL SEE NOTE.	APPROVED BY							
		FINISH SEE NOTE.				SIZE	CODE IDENT NO.	DRAWING NO.		REV.
NEXT ASSY	USED ON					B	08505	681		
APPLICATION		DO NOT SCALE DRAWING				SCALE		1:1		SHEET 1 OF 1