



ISSUE NUMBER
RE–DWG. F.BRIONES APR.22/08 ⑤
RE–DWG. F.BRIONES SEP.14/08 ⑥
REMOVE 15u" GOLD R.STA.MONICA JUN.29/10 ⑦
TAILS DIM'S ADDED F.BRIONES JUN.22/11 ⑧
TOLERANCES ADDED F.BRIONES JUN.29/11 ⑨
ADD NOTES FORCES R.STA.MONICA JUN.26/14 ⑩
NEW METAL SHELL R.STA.MONICA SEPT.12/14 ⑪
ADD ELEC. SPECS R.STA.MONICA APR.11/2016 ⑫
NEW TOOLING R.STA.MONICA OCT.30/2016 ⑬

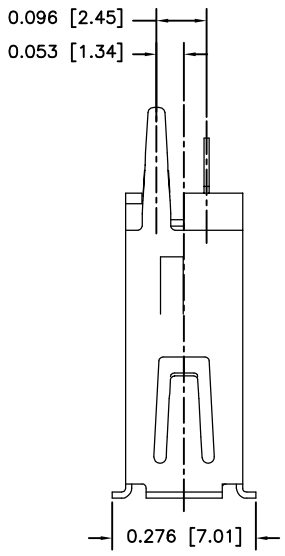

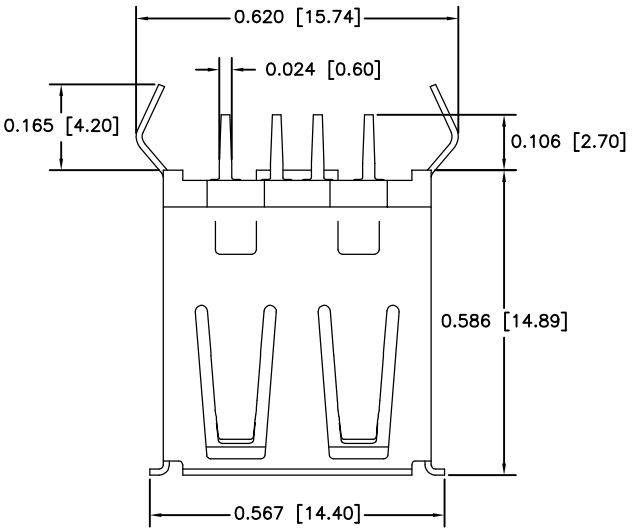

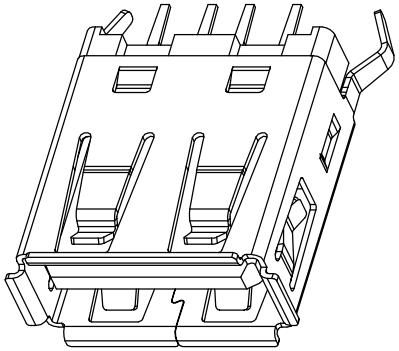

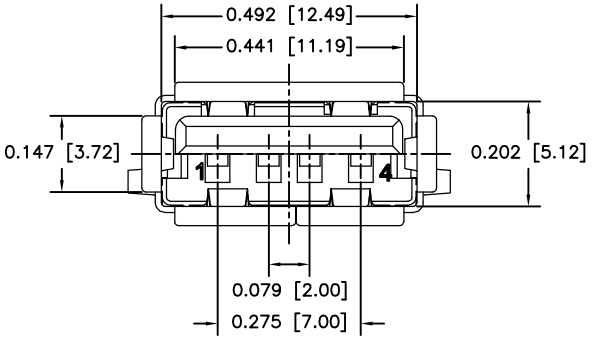

GENERAL TOLERANCES: ±.010(0.25) EXCEPT ON
PCB LAYOUT AND CONTACTS SPACING ±.006(0.15)

ELECTRICAL:

RATED CURRENT: 1.5A

RATED VOLTAGE: 30V (rms) MAX

FORCES:

MATING FORCE: 35N MAX

UNMATING FORCE: 10N MIN

MATERIALS:

SHELL: COPPER ALLOY, NICKEL PLATED


CONTACTS: COPPER ALLOY GOLD PLATE ON CONTACT AREA
TIN ON TAIL END

GOLD FLASH	260 CONTACT CODE
30 MICROINCHES OF GOLD	660 CONTACT CODE

INSULATOR: THERMOPLASTIC (HIGH TEMPERATURE RESISTANCE)

PART NUMBER: 690–004–260–013

CONTACT CODE

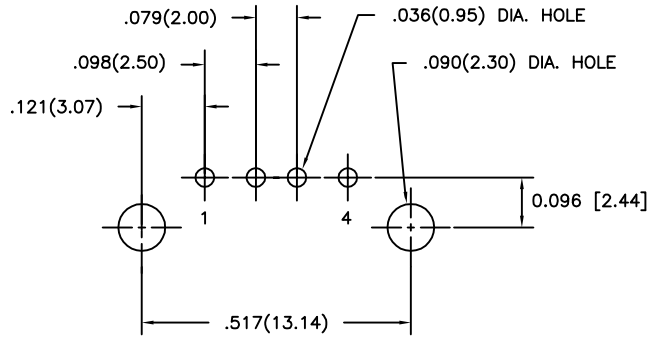

PC BOARD MOUNTING DIMENSIONS

RoHS COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

USB CONNECTOR A TYPE, VERTICAL, SINGLE DECK

ACAD REFERENCE NO. 690–004–260–013

DRAWN: J.CHOW | DATE: OCT 16/98

CHECKED: | DATE:

SCALE: (IN C.A.D. 1:1) | SHEET 1 OF 1

DRAWING NUMBER 690–004–260–013 | ISSUE 13

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.