
THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




TOLERANCE:

IN	MM
.XX ±0.01	.x: ±0.25
.XXX: ±0.006	.xx: ±0.15
.XXXX:±0.002	.xxx:±0.05

ISSUE NUMBER
ORIGINAL (1)
DIM: 0.612(15.55) WAS 0.63(16.0) 0.439(11.15) WAS 0.445(11.30) (6) 0.153(3.90) WAS 0.146(3.70) ADD DIM: 0.238(6.04), 0.207(5.25) 0.177(4.5), 0.078(2.0), 0.024(0.60) R.STA.MONICA JUN.10/2010

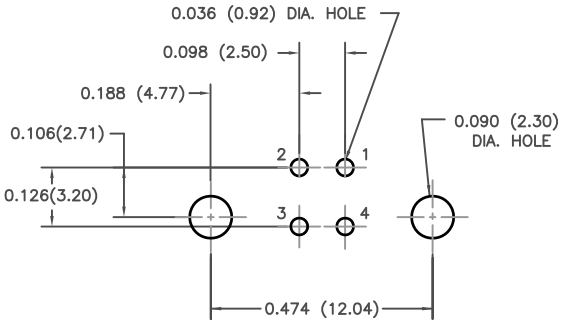

PC BOARD MOUNTING DIMENSIONS

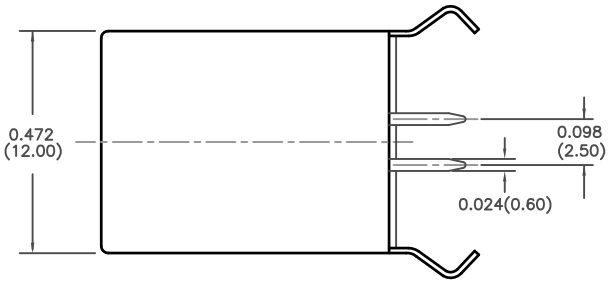



MATERIAL:
HOUSING: PBT GLASS FILLED, WHITE COLOR
CONTACTS: PHOSPHOR BRONZE, GOLD PLATED ON CONTACT AREA WITH TIN PLATING ON TAIL
SHELL: BRASS, NICKEL PLATED
BOTTOM COVER: PBT GLASS FILLED WHITE COLOR

CONTACT PLATING	GOLD PLATING PART NO.
GOLD FLASH	690-004-260-023
15 MICROINCHES OF GOLD	690-004-360-023
30 MICROINCHES OF GOLD	690-004-660-023

PART NUMBER: 690-004-260-023

CONTACT CODE

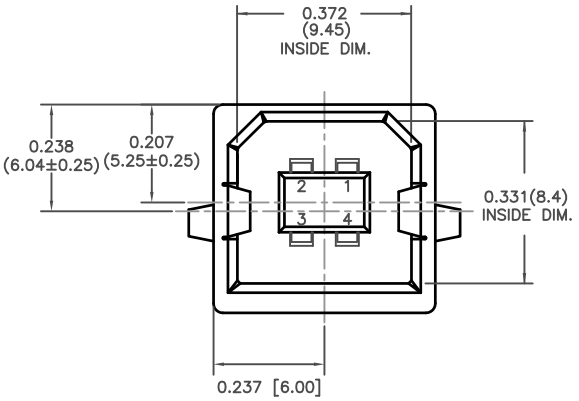

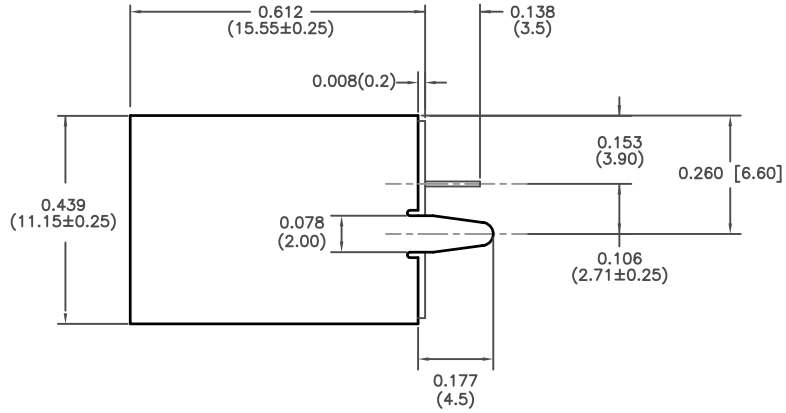

SPECIFICATIONS:
1. CONTACT RESISTANCE:
   30 mOHM MAX
2. INSULATION RESISTANCE:
   1000MOHM MIN AT 500VDC
3. RATED VOLTAGE AND CURRENT:
   1.5A @ 250VAC MIN.
4. DIELECTRIC WITHSTANDING VOLTAGE:
   500VAC (RMS) FOR 1MIN
5. INSERTION FORCE: 35N MIN
6. EXTRACTION FORCE: 10N MIN

RoHS COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCY.

USB CONNECTOR B TYPE, VERTICAL, SINGLE DECK

ACAD REFERENCE NO.	690-004-260-023
DRAWN: J.CHOW	DATE: OCT 16/98
CHECKED:	DATE:
SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 1
DRAWING NUMBER 690-004-260-023	ISSUE 6

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.