


SIGN	DATE	DESCRIPTION	APPROVER
1	8/07'06	Added VDE standard	黎仁松
2	1/27'07	Soldering temperature changed from 245° to 250°	Tony
3	2009.10.26	The material is changed from Brass to Copper	Jacke
4	2009.10.26	The operating temperature is changed	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



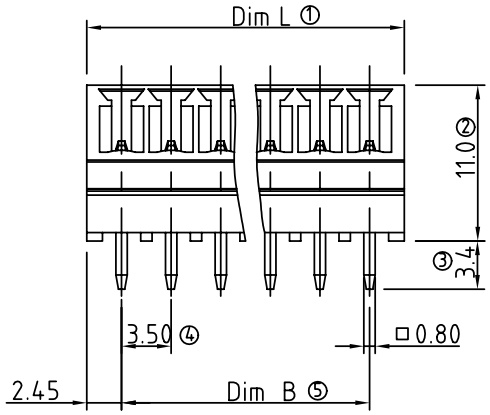




Material:

- ▲3 ● Item ⓐ Male contact pin: Copper Tin plated
- ● Item ⓑ Terminal (housing): Thermoplastic (UL94V-0)

▲1	Electrical:	cULus /VDE
●	Voltage rating:	300V/300V
●	Current rating:	8A/10A
●	Withstanding Voltage:	1.6 KV/2.5KV
▲4 ●	Operating temperature:	-40°C to +115°C
▲2 ●	Soldering temperature:	250°C±10°C/5 Sec
●	Safety Approval:	cULus VDE

VK xx 1 1 x 0 xxxx G

- xx — No. OF POLES: 02: 2 POLES … 24: 24 POLES
- x — COLOR: 0 Black (RAL9005); 2 Red (RAL3001/D); 3 Orange(RAL2011/P); 4 Yellow(RAL1018/A); 5 Green(RAL6018/T); 6 Blue (RAL5015/A); 8 Grey(RAL7035/D)
- xxxx — 0000: "@" Logo (Standard); 000A: "ANYTEK" Mark; Any special item by customer requst. please contact sales department.
- G: Pb<40000ppm

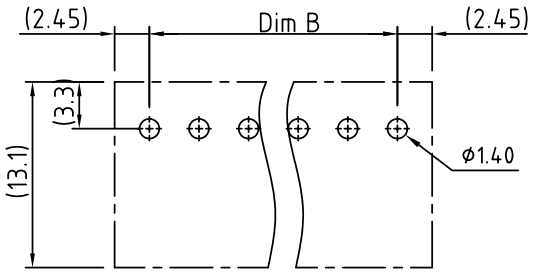

P.C.B LAYOUT

Dim.L = (N-1) x 3.5+4.9
Dim.B = (N-1) x 3.5
N= number of poles

Dim. \ poles	2P-6P	7P-12P	13P-18P	19P-24P
Dim.L	±0.15	±0.20	±0.25	±0.30
Dim.B	±0.15	±0.20	±0.25	±0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VK - 3.5mm Series (without flange)					
PART NO.	VKxx11x0xxxxG			DWG NO.	8VK0001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Jacke 2009.10.27	Jacke 2009.10.27	UNIT: mm		X. ±0.50
				SCALE: NONE		X.X ±0.30
				SHEET: 01/01	REV.: F	X.XX ±0.10 X° ±1°