



PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
01	PRELIMINARY	02/22	SEE PDM
02	PRELIMINARY	04/22	

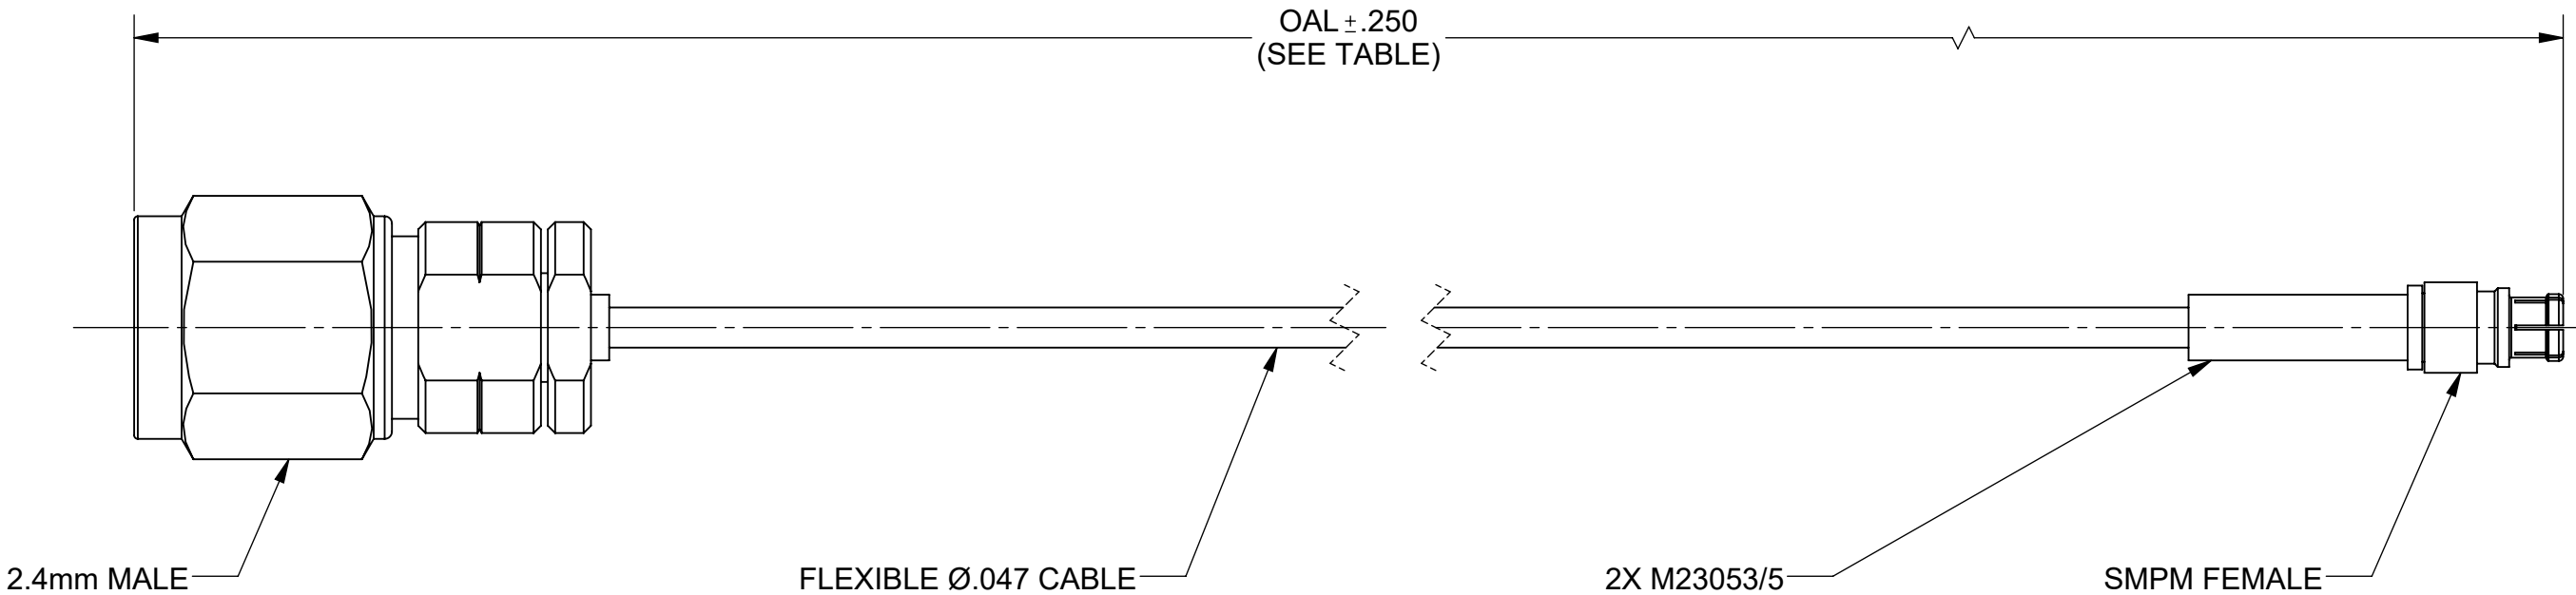

MATERIAL:	
CONNECTORS:	2.4mm MALE (SF1611-60001) SMPM FEMALE (3221-40007)
CABLE:	FLEXIBLE Ø.047 CABLE (200-70-214)
SHRINK TUBING:	M23053/5
PERFORMANCE:	
IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 50.0 GHz

SV P/N	OAL
7016-0129	6.000
7016-0130	12.000
7016-0131	24.000

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:		UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63+MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	 www.svmicrowave.com		
FINISH:	SEE NOTES	FRACTIONAL: ±1/64	ANGULAR: X° ±1°0' X°X' ±15'				
SURFACE AREA:	N/A	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994				
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION		DRAWN:	KRR 02/25/22		
				CHECKED:	SEE PDM		
				APPROVED:	SEE PDM		
				SIZE	DWG. NO.	SCALE: 4:1	
				B	7016-0129-0131		
						SHEET 1 OF 1	