

Units:mm

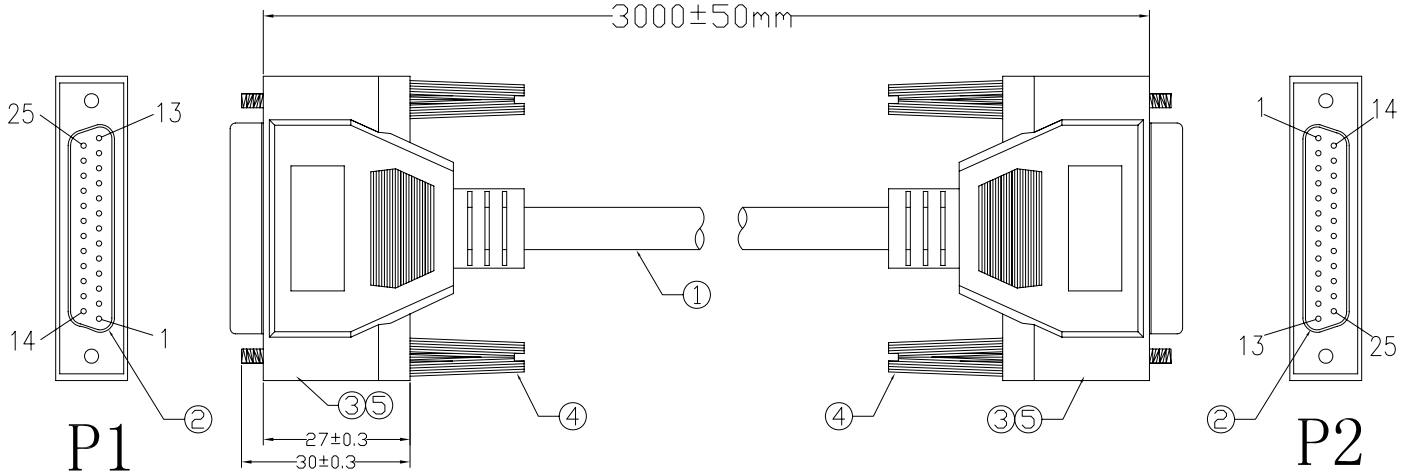

PIN ASSIGNMENT

P1		P2
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	PURPLE	8
9	GREY	9
10	WHITE	10
11	PINK	11
12	LIGHT GREEN	12
13	RED/BLACK	13
14	ORANGE/BLACK	14
15	YELLOW/BALCK	15
16	GREEN/BLACK	16
17	BLUE/BLACK	17
18	PURPLE/BLACK	18
19	WHITE/BLACK	19
20	RED/WHITE	20
21	ORANGE/WHITE	21
22	GREEN/WHITE	22
23	BLUE/WHITE	23
24	PURPLE/WHITE	24
25	BROWN/WHITE	25
SHELL	DRAIN WIRE	SHELL

Electrical test:
1.100% short,open,miswire test
2.Conduct resistance:2 0hm(max)
3.Insulation resistance:5Mohm(min)
4.dielectric test:DC 300V

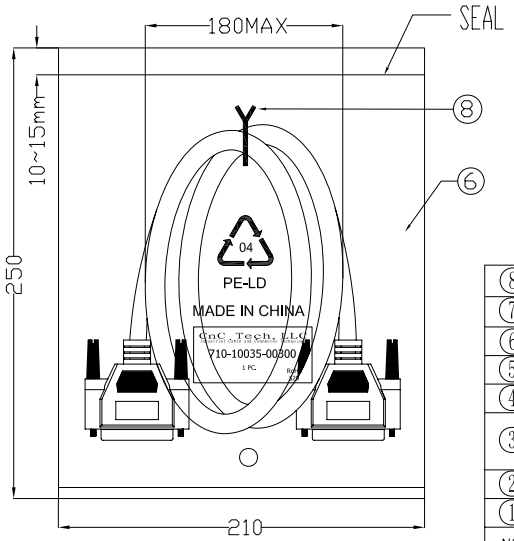

NO.	NAME	Q'TY	SPECIFICATION
⑧	TIE	1	WHITE L=120mm
⑦	PE BAG	1/5	CLEAR SIZE: 360*380*0.05mm PRINT BLACK"MADE IN CHINA"+"5PCS"
⑥	PE BAG	1	CLEAR SIZE:210*250*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*20MM
④	SCREW	4	#4-40UNC TYPE L=30mm,NICKEL PLATED,MOLD:BEIGE(IV-29) ABS
③	IN JACKET	18g	CLEAR LD-PE (Mould NO.:NM-33)
	OUT JACKET	60g	BEIGE(IV-29) 40P PVC(Mould NO.WM-017)
②	CONN	2	DB 25P FEMALE SODER TYPE PIN G/F SHELL NI-PLATED INSULATOR COLOR:BLUE
①	CABLE	1	NOUL 28AWG(7/0.12)*25C+D+AL/MY OD7.5mm JACKET BEIGE(IV-29) L=3000±15MM

CnC Tech, LLC

Industrial Cable and Connector Technology

DRAWED BY	YUFONG	DARWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	710-10035-00300
DECIDE BY		DATE	2012-02-06
VERSIONS/EDITEON	A/0	PROJECTION	