

UNIT:MM

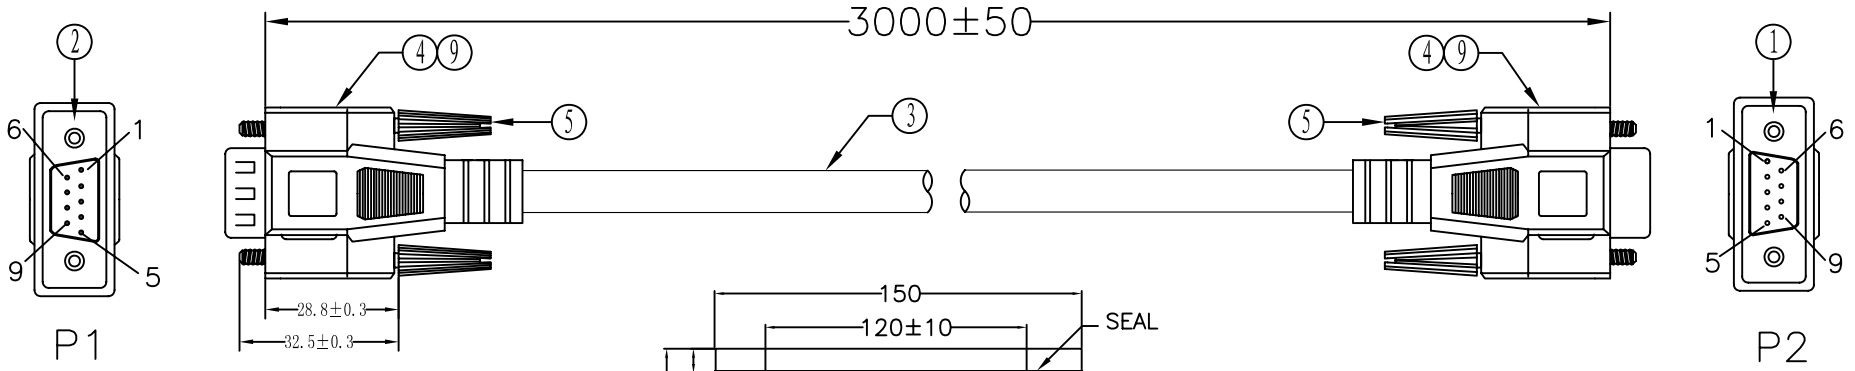

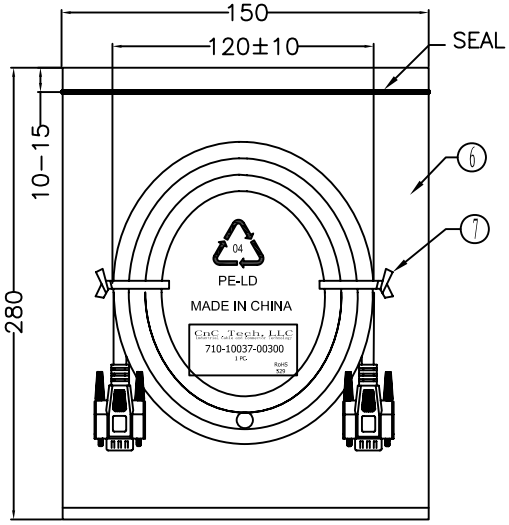

1PC/PE BAG

Electronic Test:
1.100% Test,(Open,Short,Miss Wire)
2.Contact Resistance:5 ohm max.
3.Insulation Resistance:5M ohm min.
4.Hi-Pot:300V DC.

PIN ASSIGNMENT

P1		P2
1	BLACK	1
2	GREY	2
3	YELLOW	3
4	PURPLE	4
5	ORANGE	5
6	RED	6
7	BROWN	7
8	GREEN	8
9	BLUE	9
SHELL	DRAIN	SHELL

NO.	NAME	Q'TY	SPECIFICATION
⑨	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*L15MM
⑧	PE BAG	1/10	CLEAR SIZE:360*380*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"印生产周期,有透气孔.
⑦	TIE	2	WHITE L=100mm
⑥	PE BAG	1	CLEAR SIZE:150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"印生产周期,有透气孔.
⑤	SCREW	4	SCREW:#4-40UNC D-E L32.5mm,NICKEL PLATED,INSULATION COLOR BEIGE(IV-29).
④	IN JACKET	8g	CLEAR LDPE(MOULD NO:NM-049)
	OUT JACKET	43.5g	BEIGE(IV-29#) 40P PVC(MOULD NO:WM-113)
③	CABLE	1	NOUL 30AWG*9C+D+AL OD5.0mm COLOR BEIGE(IV-29#)
②	CONN	1	DB 9P MALE SOLDER TYPE G/F ,BLUE INSULATION
①	CONN	1	DB 9P FEMALE SOLDER TYPE G/F ,BLUE INSULATION

CnC Tech, LLC
Industrial Cable and Connector Technology

DRAWED BY	ZHONGHS	DARWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	710-10037-00300
DECIDE BY		DATE	2012-02-17
VERSIONS/EDITEON	A/0	PROJECT	