

MATERIALS AND FINISHES

BODY,WASHER, RETAINING RING BRASS
PLATED NICKEL

CENTER CONTACT BRASS
PLATED GOLD

INSULATOR TEFLON

COUPLING NUT ZINC ALLOY
PLATED NICKEL

SPRING WASHER PHOSPHOR BRONZE
PLATED NICKEL


GASKET SILICONE RUBBER

CABLE ATTACHMENT:

INNER CONTACT: SOLDER OR CRIMP USING 4.29 (1.69) HEX
CRIMP TUBE: CRIMP USING 5.41 (.213) HEX

INTERFACE PER
MOLEX STANDARD
ES-73599-0000

RG58/RG141 CABLE



14.40
.567

23.00
.906

14.50
.570

13.02
.513

1.07
.042

2.50
.098

2.11
.083


3.20
.126

4.60
.181

13.00
.512

5.30
.209

6.30
.248

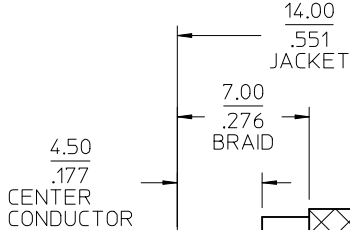

RECOMMENDED STRIP DIMENSION

PS-89675-1030

PRODUCT SPECIFICATION

SPECIFICATION

DESCRIPTION

CHG: CONTACT REAR
HOLE Ø.042
WAS Ø.039
DELETE REF FROM
DIMENSIONS
DELETE CABLE
ASSEMBLY SPEC
PS-89675-103 WAS
PS-73598-0024

EC NO: URF-2010-0237
2009/10/22
DRWN: JWIENER
2009/10/22
CHKD: SSHAH
2009/10/22
APPR: JWIENER
2009/10/22

QUALITY
SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
ANGULAR ± 2 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN
DRAWN BY DATE
KELLY 1992/06/20
CHECKED BY DATE
APPROVED BY DATE
MATERIAL NO.
SEE TABLE
SIZE C

SCALE
DESIGN UNITS
METRIC
THIRD ANGLE
PROJECTION
TITLE
BNC PLUG,STR FOR RG58,
RG141 CRIMP/CRIMP.50 OHM
BNC-PC
molex MOLEX INCORPORATED
DOCUMENT NO.
SD-73174-0093
SHEET NO.
1 OF 1