





MATERIALS AND FINISHES:

BODY, CAP: BRASS
PLATED: SEE TABLE


CENTER CONTACT: BRASS
PLATED: SEE TABLE

SNAP RING: BERYLLIUM COPPER
PLATED: SEE TABLE


INSULATOR: PTFE

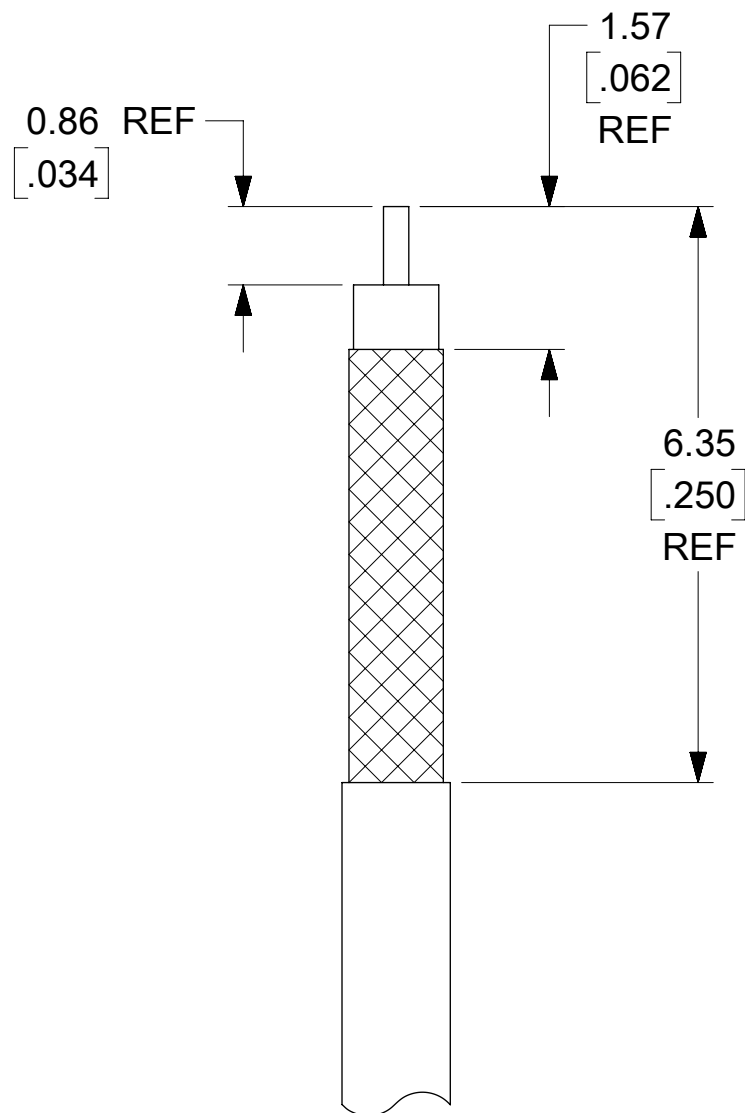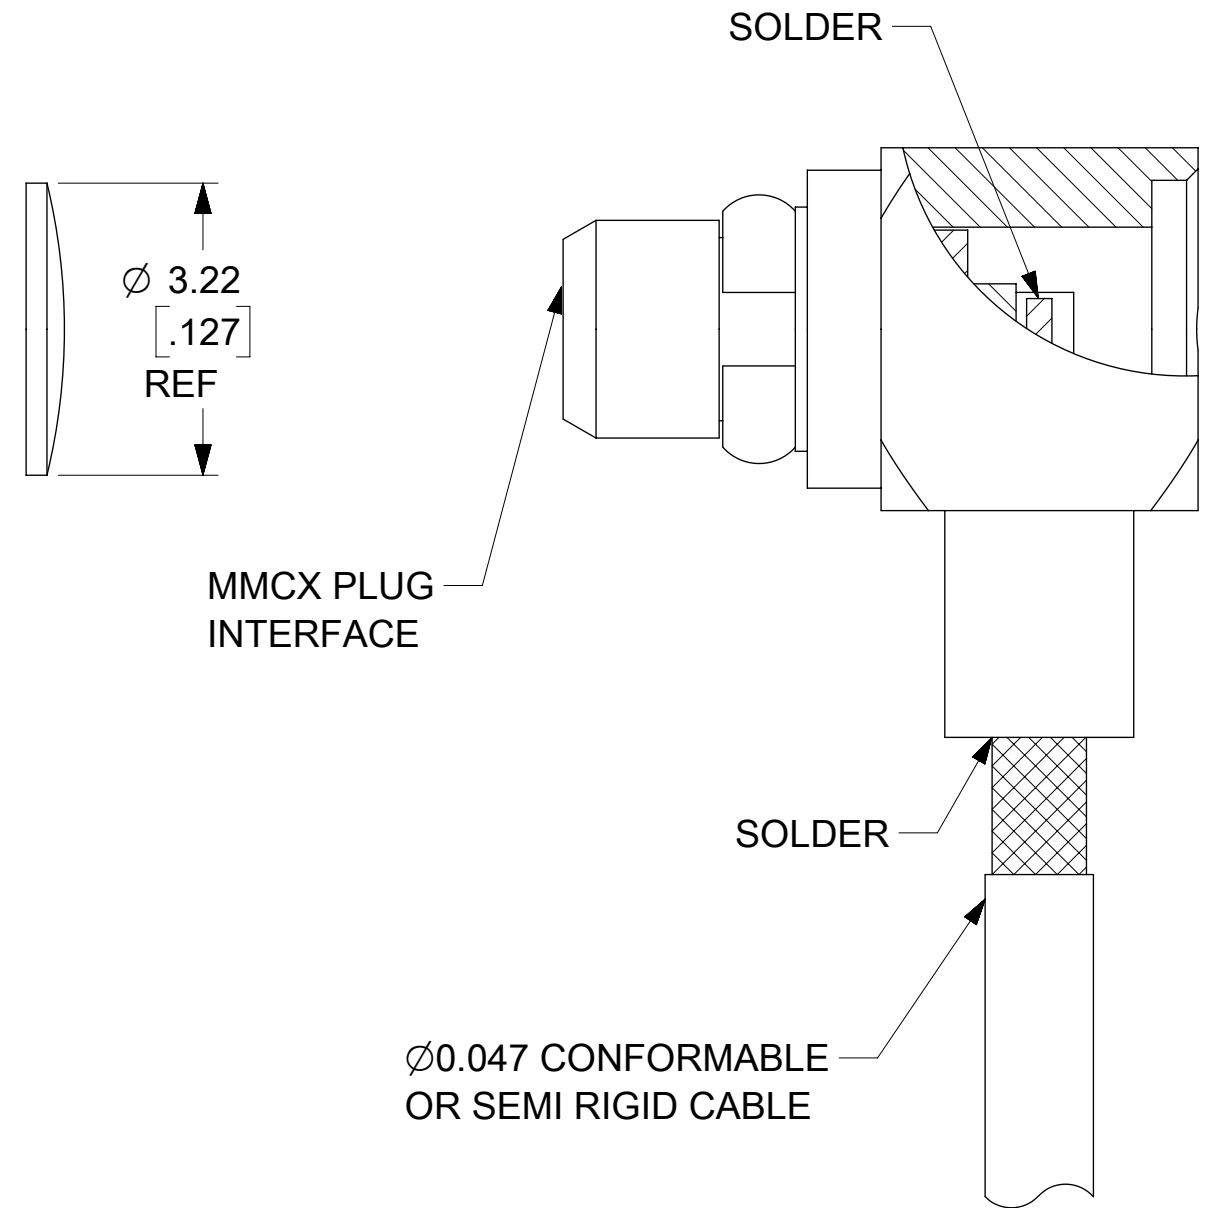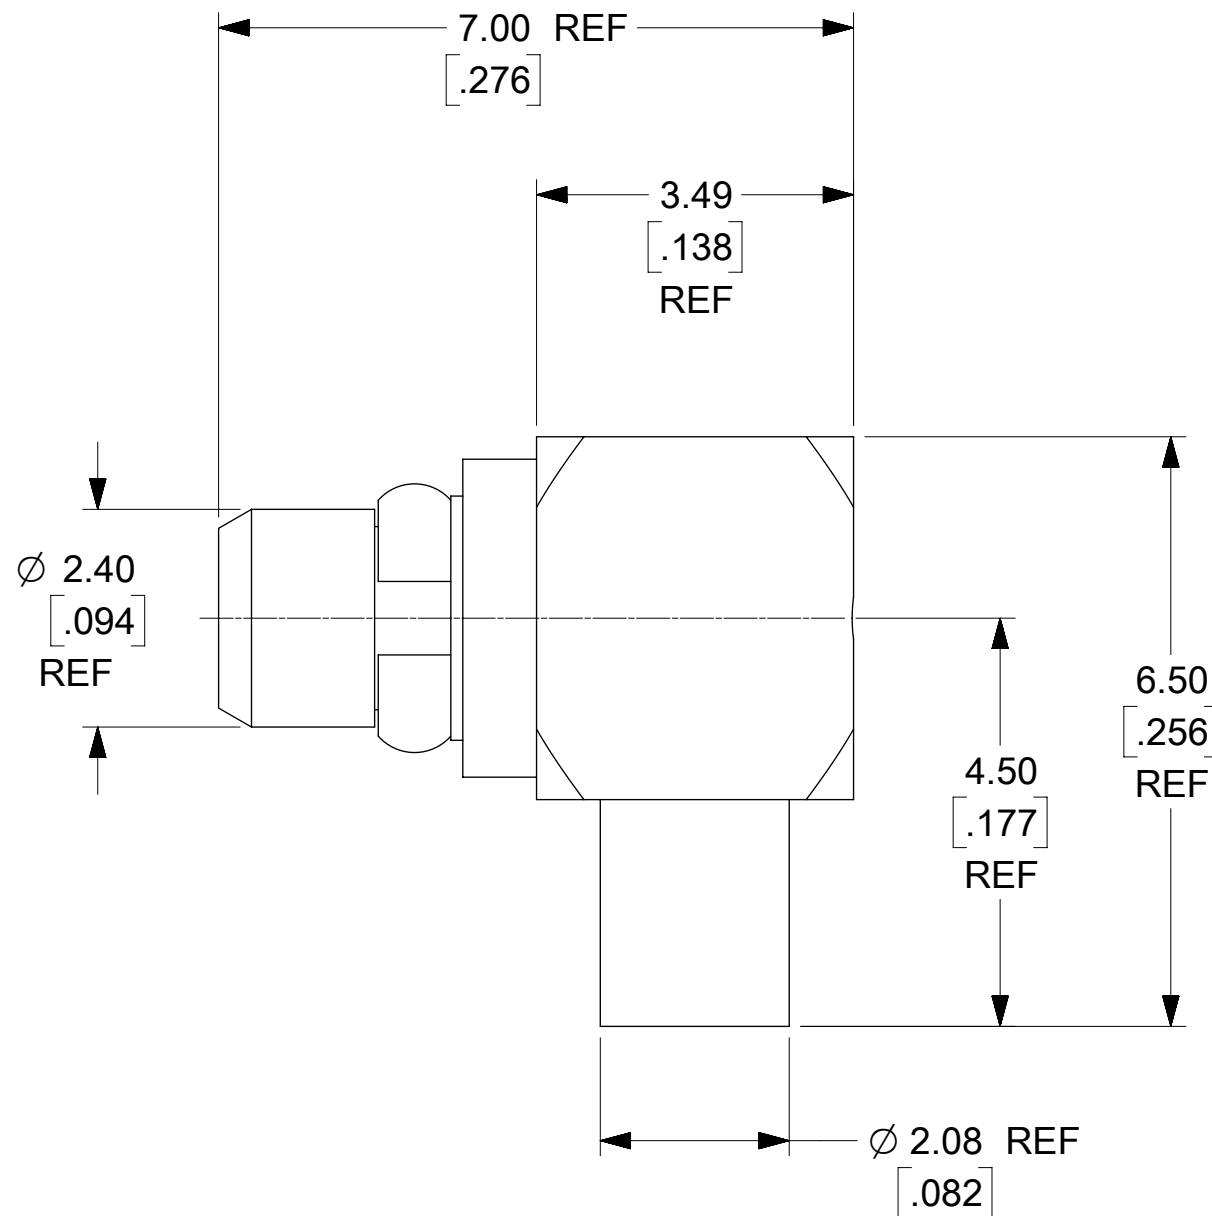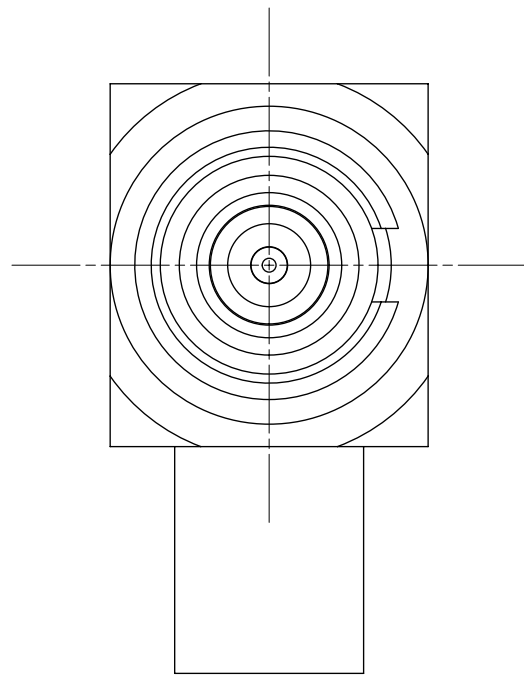

CABLE STRIP DIMENSIONS
FOR JACKETED CABLES

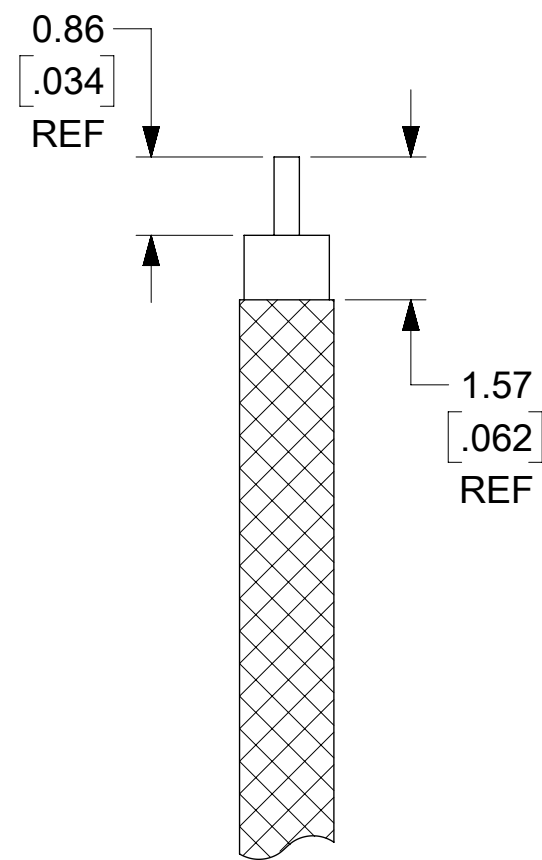

CABLE STRIP DIMENSIONS
FOR NON-JACKETED CABLES

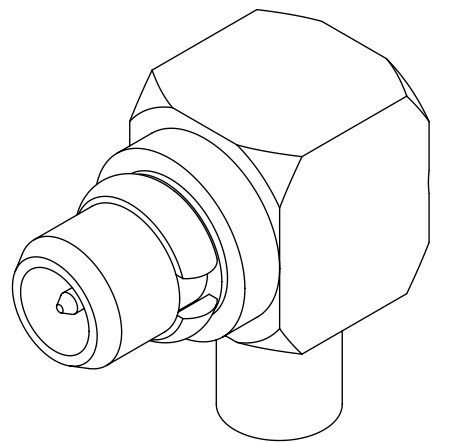

73415-2151	GOLD (1μ-in MIN) OVER NICKEL (50μ-in MIN)	GOLD (30μ-in MIN) OVER NICKEL (50μ-in MIN)	GOLD (1μ-in MIN) OVER NICKEL (50μ-in MIN)
73415-2150	GOLD (30μ-in MIN) OVER NICKEL (100μ-in MIN)	GOLD (50μ-in MIN) OVER NICKEL (100μ-in MIN)	GOLD (50μ-in MIN) OVER NICKEL (100μ-in MIN)
PART NO.	BODY, SNAP RING	CONTACT	CAP
	FINISHES		

73415-2152	73415-2151, ONE PER BAG
73415-2151	BULK
73415-2150	BULK
PART NO.	PACKAGING

AS-89675-5070	CABLE ASSY INSTRUCTION
IEC-61169-52	INTERFACE
PS-89675-1920	PRODUCT SPECIFICATION
SPECIFICATION	DESCRIPTION

QUALITY SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
▽ = 0	SEE ECM	EC NO: 120304 DRWN: BBHARADWAJD CHKD: BBHARADWAJD REV APPR: AROBERTSON	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex				
▽ = 0					mm								
▽ = 0					MM	INCH	DRWN BY	DATE					
▽ = 0			4 PLACES	±		±	JWIENER	2010/12/16	MMCX PLUG, R/A FOR SR047 CABLE, 50 OHMS, MMCX-PC, EWR-11074				
▽ = 0			3 PLACES	±		± 0.01	CHK'D BY	DATE					
▽ = 0			2 PLACES	±	0.25	±	SSS	2010/12/16	PRODUCT CUSTOMER DRAWING				
▽ = 0			1 PLACES	±		±	APPR BY	DATE					
▽ = 0			0 PLACES	±		±	JWIENER	2010/12/17					
▽ = 0			ANGULAR TOL ± 2.0		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES	MATERIAL NUMBER		CUSTOMER	
▽ = 0			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		C				73415	SEE TABLE			
▽ = 0	A3	REV							DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER
									SD-73415-215		PSD	001	1 OF 1