

MATERIALS AND FINISHES


BODY, CRIMP TUBE, CAP: BRASS
PLATED: SEE TABLE

CENTER CONTACT: BRASS
PLATED: SEE TABLE



INSULATOR, SPACER: TEFLON

OUTER CONTACT: BERYLLIUM COPPER
PLATED: SEE TABLE

NOTE: ALL GOLD PLATING
IS OVER A NICKEL LAYER

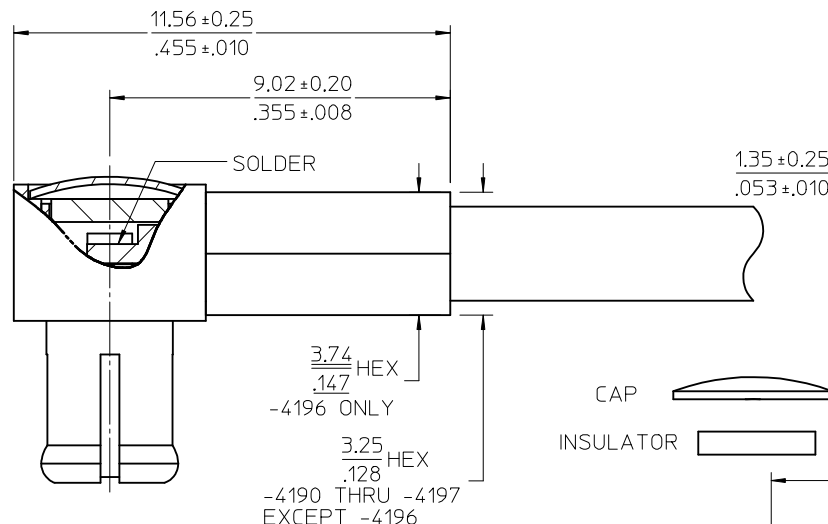

RECOMMENDED STRIPPING DIMENSIONS
(-4190 THRU -4196 ONLY)

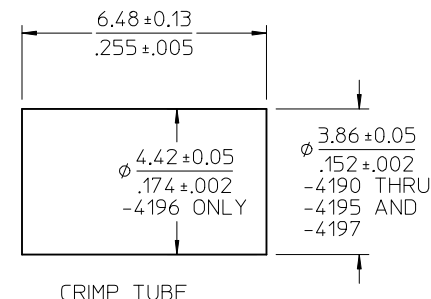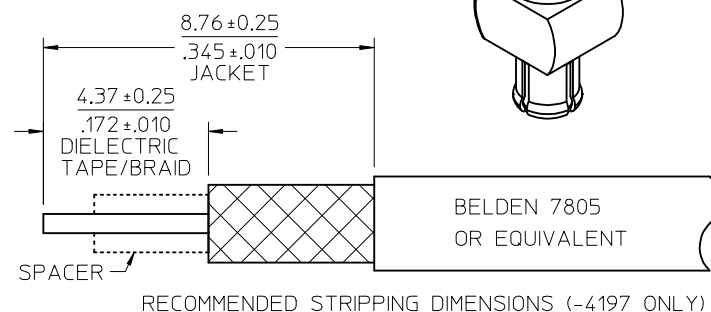

73415-4197	GOLD 10 MICRO-IN	GOLD 30 MICRO-IN	GOLD 30 MICRO-IN	GOLD 10 MICRO-IN
73415-4196	NICKEL 70 MICRO-IN	GOLD 30 MICRO-IN	GOLD 30 MICRO-IN	NICKEL 70 MICRO-IN
73415-4195	NICKEL 70 MICRO-IN	GOLD 30 MICRO-IN	GOLD 30 MICRO-IN	NICKEL 70 MICRO-IN
73415-4194	GOLD 10 MICRO-IN	GOLD 30 MICRO-IN	GOLD 30 MICRO-IN	GOLD 10 MICRO-IN
73415-4193	NICKEL 70 MICRO-IN	GOLD 30 MICRO-IN	GOLD 30 MICRO-IN	NICKEL 70 MICRO-IN
73415-4192	NICKEL 70 MICRO-IN	NICKEL 70 MICRO-IN	GOLD 30 MICRO-IN	NICKEL 70 MICRO-IN
73415-4191	GOLD 5 MICRO-IN	GOLD 10 MICRO-IN	GOLD 10 MICRO-IN	GOLD 10 MICRO-IN
73415-4190	NICKEL 70 MICRO-IN	NICKEL 70 MICRO-IN	GOLD 10 MICRO-IN	NICKEL 70 MICRO-IN
PART NO.	FINISH BODY	FINISH OC	FINISH CONTACT	FERRULE & CAP

CECC-22-220		INTERFACE
SPECIFICATION		DESCRIPTION

CHG:UPDATE BODY
FOR -4197

EC NO: URF2013-0252
2012/10/30
DRWN:SSHAH
2012/10/30
CHKD:JLEE
2012/10/30
APPR:JWENER

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0002
3 PLACES	± .005	± .0002
2 PLACES	± .005	± .0002
1 PLACE	± .005	± .0002

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
SSS	2004/05/11
CHECKED BY	DATE
TEF	2004/05/11
APPROVED BY	DATE
JDW	2004/05/11

MATERIAL NO.
SEE TABLE

SIZE
C

SCALE
DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

TITLE
MCX R/A PLUG
50 OHMS, RG316
EWR2441 MCX-PC

MOLEX INCORPORATED

DOCUMENT NO.
SD-73415-419

SHEET NO.
1 OF 1

MATERIALS AND FINISHES


BODY, CRIMP TUBE, CAP: BRASS
PLATED: SEE TABLE

CENTER CONTACT: BRASS
PLATED: SEE TABLE



INSULATOR, SPACER: TEFLON

OUTER CONTACT: BERYLLIUM COPPER
PLATED: SEE TABLE

NOTE: ALL GOLD PLATING
IS OVER A NICKEL LAYER

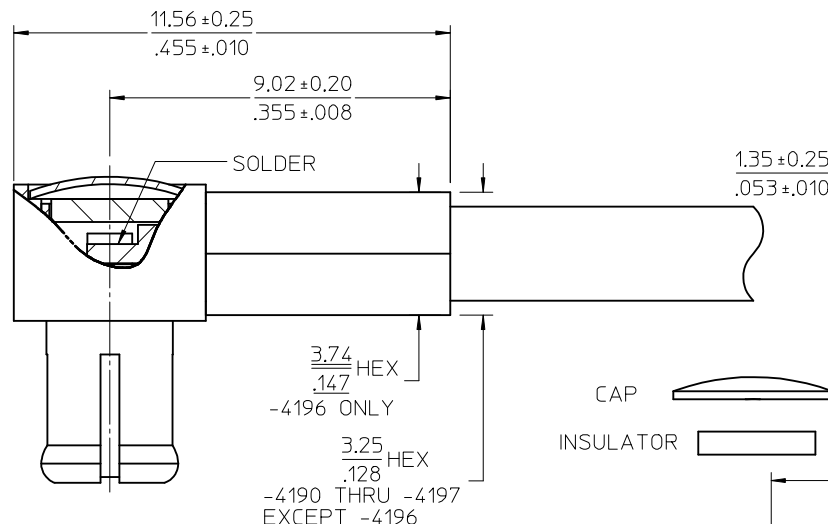

RECOMMENDED STRIPPING DIMENSIONS
(-4190 THRU -4196 ONLY)

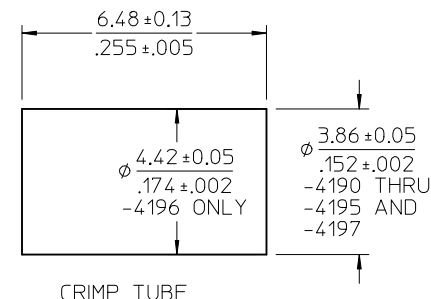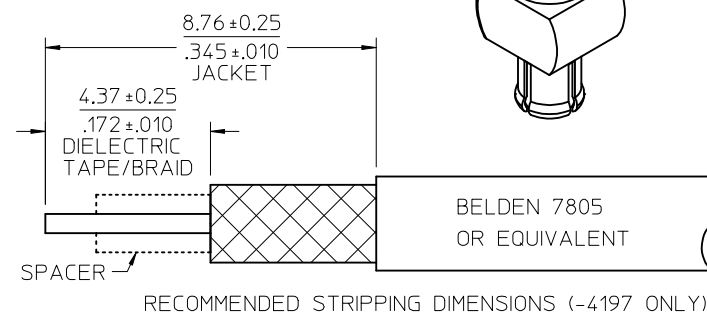

73415-4197	GOLD 10 MICRO-IN	GOLD 30 MICRO-IN	GOLD 30 MICRO-IN	GOLD 10 MICRO-IN
73415-4196	NICKEL 70 MICRO-IN	GOLD 30 MICRO-IN	GOLD 30 MICRO-IN	NICKEL 70 MICRO-IN
73415-4195	NICKEL 70 MICRO-IN	GOLD 30 MICRO-IN	GOLD 30 MICRO-IN	NICKEL 70 MICRO-IN
73415-4194	GOLD 10 MICRO-IN	GOLD 30 MICRO-IN	GOLD 30 MICRO-IN	GOLD 10 MICRO-IN
73415-4193	NICKEL 70 MICRO-IN	GOLD 30 MICRO-IN	GOLD 30 MICRO-IN	NICKEL 70 MICRO-IN
73415-4192	NICKEL 70 MICRO-IN	NICKEL 70 MICRO-IN	GOLD 30 MICRO-IN	NICKEL 70 MICRO-IN
73415-4191	GOLD 5 MICRO-IN	GOLD 10 MICRO-IN	GOLD 10 MICRO-IN	GOLD 10 MICRO-IN
73415-4190	NICKEL 70 MICRO-IN	NICKEL 70 MICRO-IN	GOLD 10 MICRO-IN	NICKEL 70 MICRO-IN
PART NO.	FINISH BODY	FINISH OC	FINISH CONTACT	FERRULE & CAP

CECC-22-220		INTERFACE
SPECIFICATION		DESCRIPTION

CHG:UPDATE BODY
FOR -4197

EC NO: URF2013-0252	2012/10/30
DRWN:SSHAH	2012/10/30
CHKD:JLEE	2012/10/30
APPR:JWENER	2012/10/30
REV	DESCRIPTION

QUALITY
SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0002
3 PLACES	± .005	± .0002
2 PLACES	± .005	± .0002
1 PLACE	± .005	± .0002

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE MM/IN	
DRAWN BY	DATE
SSS	2004/05/11
CHECKED BY	DATE
TEF	2004/05/11
APPROVED BY	DATE
JDW	2004/05/11
MATERIAL NO.	SEE TABLE
SIZE	C

SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
TITLE		
MCX R/A PLUG 50 OHMS, RG316 EWR2441 MCX-PC		
MOLEX INCORPORATED		
DOCUMENT NO.	SD-73415-419	SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION