
PANDUCT® Type G — Slotted Wall Wiring Duct

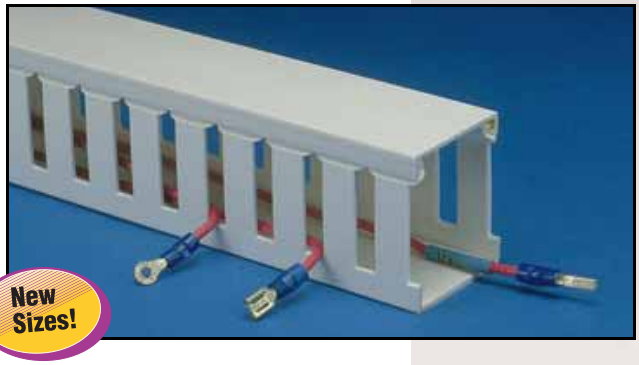

New Sizes!

Type G Slotted Wall Wiring Duct


- Made of rigid PVC (See pg. 34 for material specifications)
- Rated for continuous use temperatures up to 50°C (122°F)
- U.L. Flammability Rating: V-0
- Available in a variety of colors as a standard part†
- Provided with standard mounting holes (dimensions see pg. 29)
- Available without mounting holes (See ordering information below)
- Available with adhesive backing* (See page 22 for details)

Type G— Wiring Duct Standard Colors†:

LG	DG	WH
Light Gray	Dark Gray	White

BL	IB
Black	IntrinsicBlue

Colors shown are approximate.



	Duct Part Number	Duct External Dimensions WxH IN.	Duct External Dimensions WxH (mm)	Cover Part Number	Duct Std. Ctn. Qty.	Cover Std. Ctn. Qty.	Std. Lgth
✔	G.5X.5LG6	0.69 x .56	(17.5) x (14.2)	C.5LG6	120 ft.	120 ft.	6 ft.
✔	G.5X1LG6	0.69 x 1.09	(17.5) x (27.1)		120 ft.	120 ft.	
	G.75X.75LG6	0.94 x 0.83	(23.9) x (21.0)	C.75LG6	120 ft.	120 ft.	6 ft.
✔	G.75X1LG6	0.94 x 1.09	(23.9) x (27.1)		120 ft.	120 ft.	
	G.75X1.5LG6	0.94 x 1.58	(23.9) x (40.0)		120 ft.	120 ft.	
✔	G.75X2LG6	0.94 x 2.09	(23.9) x (53.0)		120 ft.	120 ft.	
	G1X1LG6	1.25 x 1.09	(31.8) x (27.1)	C1LG6	120 ft.	120 ft.	6 ft.
	G1X1.5LG6	1.25 x 1.59	(31.8) x (40.3)		120 ft.	120 ft.	
	G1X2LG6	1.25 x 2.09	(31.8) x (53.0)		120 ft.	120 ft.	
	G1X3LG6	1.25 x 3.10	(31.8) x (78.6)		120 ft.	120 ft.	
	G1X4LG6	1.25 x 4.10	(31.8) x (104.0)		60 ft.	120 ft.	
	G1.5X1 LG6	1.75 x 1.09	(44.5) x (27.1)	C1.5LG6	120 ft.	120 ft.	6 ft.
	G1.5X1.5LG6	1.75 x 1.59	(44.5) x (40.3)		120 ft.	120 ft.	
	G1.5X2LG6	1.75 x 2.09	(44.5) x (53.0)		120 ft.	120 ft.	
	G1.5X3LG6	1.75 x 3.10	(44.5) x (78.6)		120 ft.	120 ft.	
	G1.5X4LG6	1.75 x 4.10	(44.5) x (104.0)		60 ft.	120 ft.	
	G2X1 LG6	2.25 x 1.09	(57.2) x (27.1)	C2LG6	120 ft.	120 ft.	6 ft.
	G2X1.5LG6	2.25 x 1.59	(57.2) x (40.3)		120 ft.	120 ft.	
	G2X2LG6	2.25 x 2.09	(57.2) x (53.0)		120 ft.	120 ft.	
	G2X3LG6	2.25 x 3.10	(57.2) x (78.6)		60 ft.	120 ft.	
	G2X4LG6	2.25 x 4.10	(57.2) x (104.0)		60 ft.	120 ft.	
	G2X5LG6	2.25 x 5.11	(57.2) x (129.7)		60 ft.	120 ft.	
✔	G2.5X3LG6	2.75 x 3.12	(69.9) x (79.2)	C2.5LG6	60 ft.	120 ft.	6 ft.
	G3X1LG6	3.25 x 1.09	(82.6) x (27.6)	C3LG6	120 ft.	120 ft.	6 ft.
	G3X2LG6	3.25 x 2.09	(82.6) x (53.0)		120 ft.	120 ft.	
	G3X3LG6	3.25 x 3.10	(82.6) x (78.6)		60 ft.	120 ft.	
	G3X4LG6	3.25 x 4.10	(82.6) x (104.0)		60 ft.	120 ft.	
	G3X5LG6	3.25 x 5.11	(82.6) x (129.7)		60 ft.	120 ft.	
✔	G4X1.5LG6	4.25 x 1.58	(108.0) x (40.0)	C4LG6	60 ft.	120 ft.	6 ft.
	G4X2LG6	4.25 x 2.09	(108.0) x (53.0)		60 ft.	120 ft.	
	G4X3LG6	4.25 x 3.10	(108.0) x (78.6)		60 ft.	120 ft.	
	G4X4LG6	4.25 x 4.10	(108.0) x (104.0)		60 ft.	120 ft.	
	G4X5LG6	4.25 x 5.11	(108.0) x (129.7)		60 ft.	120 ft.	
✔	G6X4LG6	6.25 x 4.11	(158.8) x (104.4)	C6LG6	60 ft.	120 ft.	6 ft.

*Adhesive tape is not CSA Certified. See page 29 for complete listing of dimensions. ✔=New Sizes

Ordering Information:

- Order number of feet required in multiples of 6 ft or Std. Carton quantities.
- To order duct without mounting holes, add NM to Part Number.
- To order with pressure-sensitive adhesive mounting tape applied, add -A to Part Number.
- Part Number shown for Light Gray LG. To order other colors, substitute WH for White, DG for Dark Gray, BL for Black, and IB for Intrinsic Blue

†See page 36 to determine which sizes are available in each color

Part Number Nomenclature —

G	.5	X	.5	LG	6
type/style	nominal width (in)		nominal height (in)	color	length (ft)