74HC4053; 74HCT4053

Triple 2-channel analog multiplexer/demultiplexer

Rev. 8 — 19 July 2012 Product data sheet

1. General description

The 74HC4053; 74HCT4053 is a high-speed Si-gate CMOS device and is pin compatible with the HEF4053B. It is specified in compliance with JEDEC standard no. 7A.

The 74HC4053; 74HCT4053 is triple 2-channel analog multiplexer/demultiplexer with a common enable input ($\overline{E}$). Each multiplexer/demultiplexer has two independent inputs/outputs (nY0 and nY1), a common input/output (nZ) and three digital select inputs (Sn). With $\overline{E}$ LOW, one of the two switches is selected (low-impedance ON-state) by S1 to S3. With $\overline{E}$ HIGH, all switches are in the high-impedance OFF-state, independent of S1 to S3.

V_{CC} and GND are the supply voltage pins for the digital control inputs (S0 to S2, and $\overline{E}$). The V_{CC} to GND ranges are 2.0 V to 10.0 V for 74HC4053 and 4.5 V to 5.5 V for 74HCT4053. The analog inputs/outputs (nY0 to nY1, and nZ) can swing between V_{CC} as a positive limit and V_{EE} as a negative limit. $V_{CC} - V_{EE}$ may not exceed 10.0 V.

For operation as a digital multiplexer/demultiplexer, V_{EE} is connected to GND (typically ground).

2. Features and benefits

- Wide analog input voltage range from −5 V to +5 V
- Low ON resistance:
  - 80 Ω (typical) at $V_{CC} - V_{EE}$ = 4.5 V
  - 70 Ω (typical) at $V_{CC} - V_{EE}$ = 6.0 V
  - 60 Ω (typical) at $V_{CC} - V_{EE}$ = 9.0 V
- Logic level translation: to enable 5 V logic to communicate with ±5 V analog signals
- Typical ‘break before make’ built-in
- ESD protection:
  - HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V
  - CDM JESD22-C101E exceeds 1000 V
- Multiple package options
- Specified from −40 °C to +85 °C and −40 °C to +125 °C

3. Applications

- Analog multiplexing and demultiplexing
- Digital multiplexing and demultiplexing
- Signal gating

4. Ordering information

Table 1. Ordering information

Type number	Package			
	Temperature range	Name	Description	Version
74HC4053N	−40 °C to +125 °C	DIP16	plastic dual in-line package; 16 leads (300 mil)	SOT38-4
74HCT4053N				
74HC4053D	−40 °C to +125 °C	SO16	plastic small outline package; 16 leads; body width 3.9 mm	SOT109-1
74HCT4053D				
74HC4053DB	−40 °C to +125 °C	SSOP16	plastic shrink small outline package; 16 leads; body width 5.3 mm	SOT338-1
74HCT4053DB				
74HC4053PW	−40 °C to +125 °C	TSSOP16	plastic thin shrink small outline package; 16 leads; body width 4.4 mm	SOT403-1
74HCT4053PW				
74HC4053BQ	−40 °C to +125 °C	DHVQFN16	plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 16 terminals; body 2.5 × 3.5 × 0.85 mm	SOT763-1
74HCT4053BQ				

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

5. Functional diagram

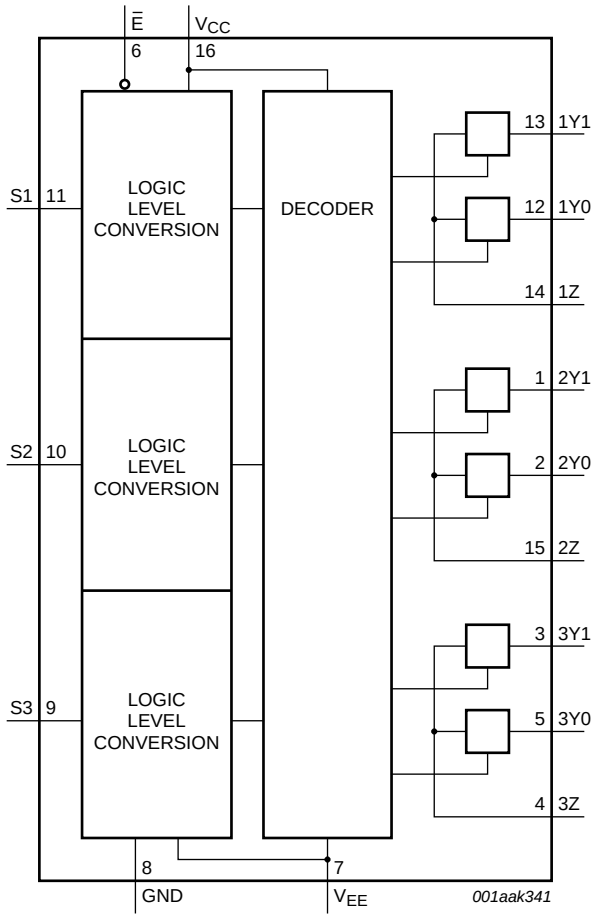


Fig 1. Functional diagram

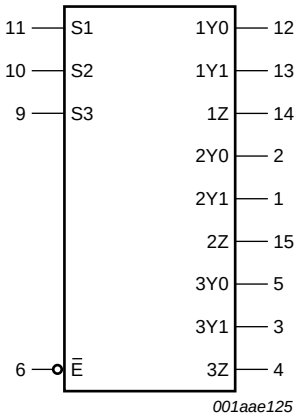


Fig 2. Logic symbol

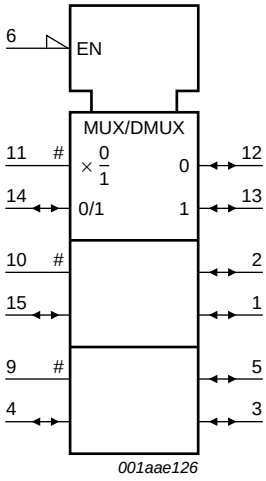


Fig 3. IEC logic symbol

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

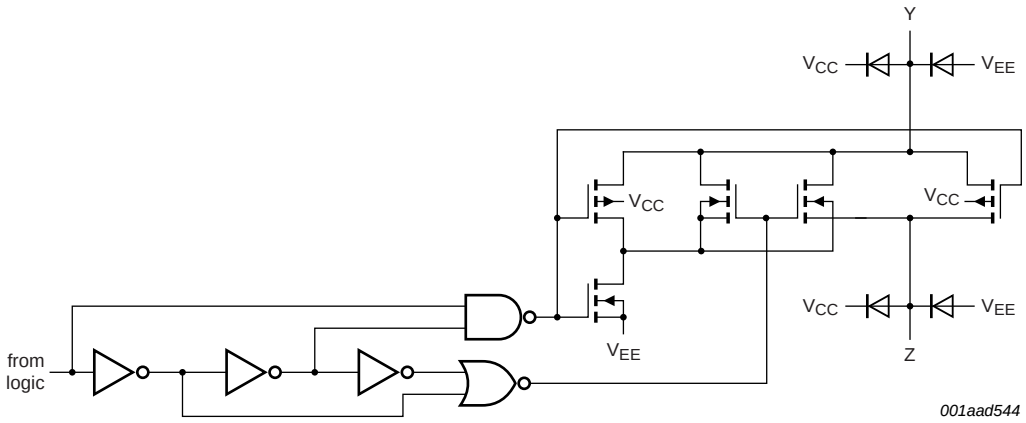


Fig 4. Schematic diagram (one switch)

6. Pinning information

6.1 Pinning


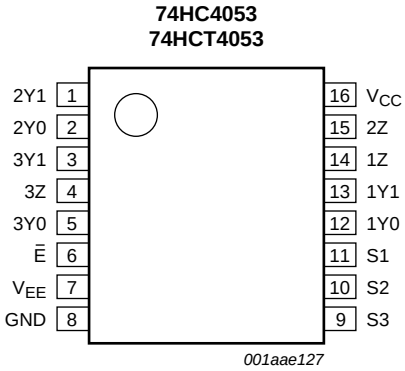


Fig 5. Pin configuration DIP16, SO16, and (T)SSOP16

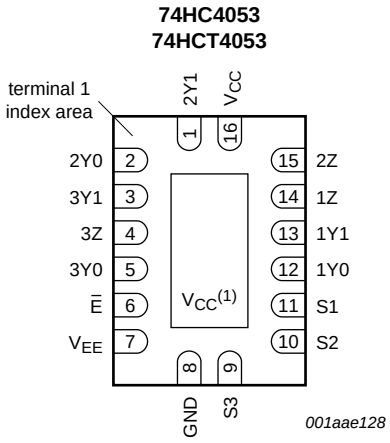

Transparent top view

(1) This is not a supply pin. The substrate is attached to this pad using conductive die attach material. There is no electrical or mechanical requirement to solder this pad. However, if it is soldered, the solder land should remain floating or be connected to V_{CC}.

Fig 6. Pin configuration DHVQFN16

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

6.2 Pin description

Table 2. Pin description

Symbol	Pin	Description
$\overline{E}$	6	enable input (active LOW)
V_{EE}	7	supply voltage
GND	8	ground supply voltage
S1, S2, S3	11, 10, 9	select input
1Y0, 2Y0, 3Y0	12, 2, 5	independent input or output
1Y1, 2Y1, 3Y1	13, 1, 3	independent input or output
1Z, 2Z, 3Z	14, 15, 4	common output or input
V_{CC}	16	supply voltage

7. Functional description

Table 3. Function table [1]

Inputs		Channel on
$\overline{E}$	Sn	
L	L	nY0 to nZ
L	H	nY1 to nZ
H	X	switches off

[1] H = HIGH voltage level; L = LOW voltage level; X = don't care.

8. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to V_{SS} = 0 V (ground).

Symbol	Parameter	Conditions		Min	Max	Unit
V_{CC}	supply voltage		[1]	−0.5	+11.0	V
I_{IK}	input clamping current	$V_I < -0.5$ V or $V_I > V_{CC} + 0.5$ V		-	±20	mA
I_{SK}	switch clamping current	$V_{SW} < -0.5$ V or $V_{SW} > V_{CC} + 0.5$ V		-	±20	mA
I_{SW}	switch current	-0.5 V $< V_{SW} < V_{CC} + 0.5$ V		-	±25	mA
I_{EE}	supply current			-	±20	mA
I_{CC}	supply current			-	50	mA
I_{GND}	ground current			-	−50	mA
T_{stg}	storage temperature			−65	+150	°C
P_{tot}	total power dissipation	DIP16 package	[2]	-	750	mW
		SO16, (T)SSOP16, and DHVQFN16 package	[3]	-	500	mW
P	power dissipation	per switch		-	100	mW

[1] To avoid drawing V_{CC} current out of terminal nZ, when switch current flows into terminals nYn, the voltage drop across the bidirectional switch must not exceed 0.4 V. If the switch current flows into terminal nZ, no V_{CC} current will flow out of terminals nYn, and in this case there is no limit for the voltage drop across the switch, but the voltages at nYn and nZ may not exceed V_{CC} or V_{EE}.

[2] For DIP16 packages: above 70 °C the value of P_{tot} derates linearly with 12 mW/K.

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

[3] For SO16 packages: above 70 °C the value of P_{tot} derates linearly with 8 mW/K.
For SSOP16 and TSSOP16 packages: above 60 °C the value of P_{tot} derates linearly with 5.5 mW/K.
For DHVQFN16 packages: above 60 °C the value of P_{tot} derates linearly with 4.5 mW/K.

9. Recommended operating conditions

Table 5. Recommended operating conditions

Symbol	Parameter	Conditions	74HC4053			74HCT4053			Unit
			Min	Typ	Max	Min	Typ	Max	
V_{CC}	supply voltage	see Figure 7 and Figure 8							
		V_{CC} − GND	2.0	5.0	10.0	4.5	5.0	5.5	V
		V_{CC} − V_{EE}	2.0	5.0	10.0	2.0	5.0	10.0	V
V_I	input voltage		GND	-	V_{CC}	GND	-	V_{CC}	V
V_{SW}	switch voltage		V_{EE}	-	V_{CC}	V_{EE}	-	V_{CC}	V
T_{amb}	ambient temperature		−40	+25	+125	−40	+25	+125	°C
$\Delta t/\Delta V$	input transition rise and fall rate	V_{CC} = 2.0 V	-	-	625	-	-	-	ns/V
		V_{CC} = 4.5 V	-	1.67	139	-	1.67	139	ns/V
		V_{CC} = 6.0 V	-	-	83	-	-	-	ns/V
		V_{CC} = 10.0 V	-	-	31	-	-	-	ns/V

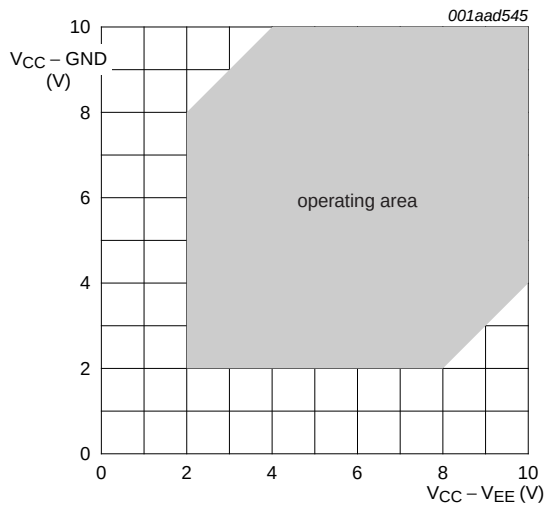


Fig 7. Guaranteed operating area as a function of the supply voltages for 74HC4053

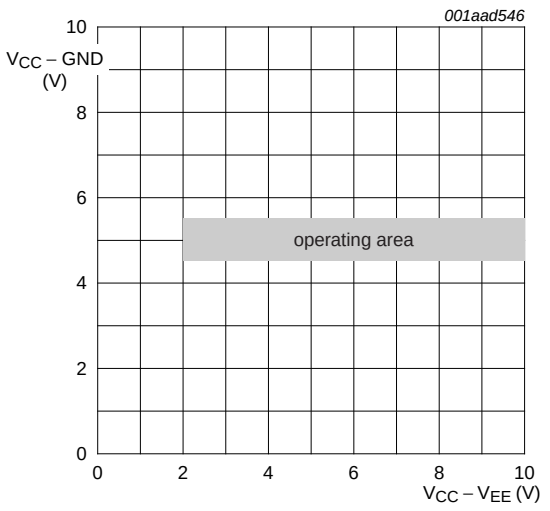


Fig 8. Guaranteed operating area as a function of the supply voltages for 74HCT4053

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

10. Static characteristics

Table 6. R_{ON} resistance per switch for 74HC4053 and 74HCT4053

$V_I = V_{IH}$ or V_{IL}; for test circuit see Figure 9.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.
For 74HC4053: $V_{CC} - GND$ or $V_{CC} - V_{EE}$ = 2.0 V, 4.5 V, 6.0 V and 9.0 V.
For 74HCT4053: $V_{CC} - GND$ = 4.5 V and 5.5 V, $V_{CC} - V_{EE}$ = 2.0 V, 4.5 V, 6.0 V and 9.0 V.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
T_{amb} = 25 °C							
$R_{ON(peak)}$	ON resistance (peak)	V_{is} = V_{CC} to V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 μA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	100	180	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	90	160	Ω
		V_{CC} = 4.5 V; V_{EE} = –4.5 V; I_{SW} = 1000 μA		-	70	130	Ω
$R_{ON(rail)}$	ON resistance (rail)	V_{is} = V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 μA	[1]	-	150	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	80	140	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	70	120	Ω
		V_{CC} = 4.5 V; V_{EE} = –4.5 V; I_{SW} = 1000 μA		-	60	105	Ω
		V_{is} = V_{CC}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 μA	[1]	-	150	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	90	160	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	80	140	Ω
		V_{CC} = 4.5 V; V_{EE} = –4.5 V; I_{SW} = 1000 μA		-	65	120	Ω
ΔR_{ON}	ON resistance mismatch between channels	V_{is} = V_{CC} to V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	9	-	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	8	-	Ω
		V_{CC} = 4.5 V; V_{EE} = –4.5 V		-	6	-	Ω
T_{amb} = –40 °C to +85 °C							
$R_{ON(peak)}$	ON resistance (peak)	V_{is} = V_{CC} to V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 μA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	225	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	200	Ω
		V_{CC} = 4.5 V; V_{EE} = –4.5 V; I_{SW} = 1000 μA		-	-	165	Ω

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

Table 6. R_{ON} resistance per switch for 74HC4053 and 74HCT4053 *…continued*


$V_I = V_{IH}$ or V_{IL}; for test circuit see Figure 9.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.
For 74HC4053: $V_{CC} - GND$ or $V_{CC} - V_{EE}$ = 2.0 V, 4.5 V, 6.0 V and 9.0 V.
For 74HCT4053: $V_{CC} - GND$ = 4.5 V and 5.5 V, $V_{CC} - V_{EE}$ = 2.0 V, 4.5 V, 6.0 V and 9.0 V.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
$R_{ON(rail)}$	ON resistance (rail)	$V_{is} = V_{EE}$					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 μA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	175	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	150	Ω
		V_{CC} = 4.5 V; V_{EE} = −4.5 V; I_{SW} = 1000 μA		-	-	130	Ω
		$V_{is} = V_{CC}$					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 μA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	200	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	175	Ω
		V_{CC} = 4.5 V; V_{EE} = −4.5 V; I_{SW} = 1000 μA		-	-	150	Ω
T_{amb} = −40 °C to +125 °C							
$R_{ON(peak)}$	ON resistance (peak)	$V_{is} = V_{CC}$ to V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 μA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	270	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	240	Ω
		V_{CC} = 4.5 V; V_{EE} = −4.5 V; I_{SW} = 1000 μA		-	-	195	Ω
$R_{ON(rail)}$	ON resistance (rail)	$V_{is} = V_{EE}$					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 μA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	210	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	180	Ω
		V_{CC} = 4.5 V; V_{EE} = −4.5 V; I_{SW} = 1000 μA		-	-	160	Ω
		$V_{is} = V_{CC}$					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 μA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	240	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 μA		-	-	210	Ω
		V_{CC} = 4.5 V; V_{EE} = −4.5 V; I_{SW} = 1000 μA		-	-	180	Ω

[1] When supply voltages ($V_{CC} - V_{EE}$) near 2.0 V the analog switch ON resistance becomes extremely non-linear. When using a supply of 2 V, it is recommended to use these devices only for transmitting digital signals.

All information provided in this document is subject to legal disclaimers.


© NXP B.V. 2012. All rights reserved.

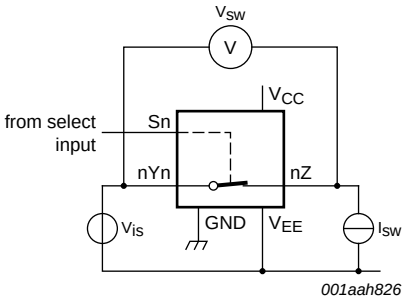

V_{is} = 0 V to (V_{CC} − V_{EE}).

$$R_{ON} = \frac{V_{sw}}{I_{sw}}$$

Fig 9. Test circuit for measuring R_{ON}

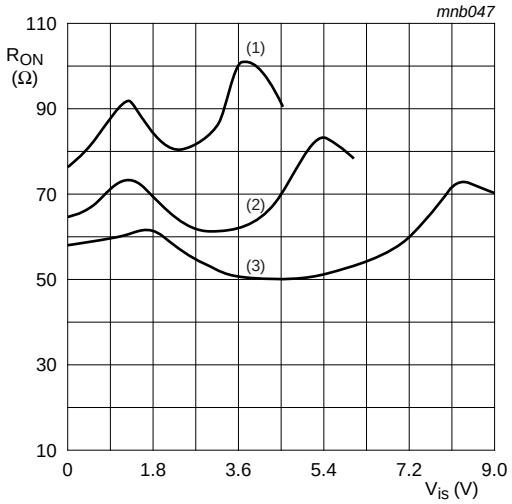

V_{is} = 0 V to (V_{CC} − V_{EE}).

(1) V_{CC} = 4.5 V

(2) V_{CC} = 6 V

(3) V_{CC} = 9 V

Fig 10. Typical R_{ON} as a function of input voltage V_{is}

Table 7. Static characteristics for 74HC4053

Voltages are referenced to GND (ground = 0 V).
V_{is} is the input voltage at pins nYn or nZ, whichever is assigned as an input.
V_{os} is the output voltage at pins nZ or nYn, whichever is assigned as an output.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_{amb} = 25 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 2.0 V	1.5	1.2	-	V
		V_{CC} = 4.5 V	3.15	2.4	-	V
		V_{CC} = 6.0 V	4.2	3.2	-	V
		V_{CC} = 9.0 V	6.3	4.7	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 2.0 V	-	0.8	0.5	V
		V_{CC} = 4.5 V	-	2.1	1.35	V
		V_{CC} = 6.0 V	-	2.8	1.8	V
		V_{CC} = 9.0 V	-	4.3	2.7	V
I_I	input leakage current	V_{EE} = 0 V; V_I = V_{CC} or GND				
		V_{CC} = 6.0 V	-	-	±0.1	μA
		V_{CC} = 10.0 V	-	-	±0.2	μA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} − V_{EE}; see Figure 11				
		per channel	-	-	±0.1	μA
		all channels	-	-	±0.1	μA
$I_{S(ON)}$	ON-state leakage current	V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} − V_{EE}; V_{CC} = 10.0 V; V_{EE} = 0 V; see Figure 12	-	-	±0.1	μA

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

Table 7. Static characteristics for 74HC4053 *…continued*

Voltages are referenced to GND (ground = 0 V).
V_{is} is the input voltage at pins nYn or nZ, whichever is assigned as an input.
V_{os} is the output voltage at pins nZ or nYn, whichever is assigned as an output.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
I_{CC}	supply current	V_{EE} = 0 V; V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC}; V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 6.0 V	-	-	8.0	μA
		V_{CC} = 10.0 V	-	-	16.0	μA
C_I	input capacitance		-	3.5	-	pF
C_{sw}	switch capacitance	independent pins nYn	-	5	-	pF
		common pins nZ	-	8	-	pF
T_{amb} = −40 °C to +85 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 2.0 V	1.5	-	-	V
		V_{CC} = 4.5 V	3.15	-	-	V
		V_{CC} = 6.0 V	4.2	-	-	V
		V_{CC} = 9.0 V	6.3	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 2.0 V	-	-	0.5	V
		V_{CC} = 4.5 V	-	-	1.35	V
		V_{CC} = 6.0 V	-	-	1.8	V
		V_{CC} = 9.0 V	-	-	2.7	V
I_I	input leakage current	V_{EE} = 0 V; V_I = V_{CC} or GND				
		V_{CC} = 6.0 V	-	-	±1.0	μA
		V_{CC} = 10.0 V	-	-	±2.0	μA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} − V_{EE}; see Figure 11				
		per channel	-	-	±1.0	μA
		all channels	-	-	±1.0	μA
$I_{S(ON)}$	ON-state leakage current	V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} − V_{EE}; V_{CC} = 10.0 V; V_{EE} = 0 V; see Figure 12	-	-	±1.0	μA
I_{CC}	supply current	V_{EE} = 0 V; V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC}; V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 6.0 V	-	-	80.0	μA
		V_{CC} = 10.0 V	-	-	160.0	μA
T_{amb} = −40 °C to +125 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 2.0 V	1.5	-	-	V
		V_{CC} = 4.5 V	3.15	-	-	V
		V_{CC} = 6.0 V	4.2	-	-	V
		V_{CC} = 9.0 V	6.3	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 2.0 V	-	-	0.5	V
		V_{CC} = 4.5 V	-	-	1.35	V
		V_{CC} = 6.0 V	-	-	1.8	V
		V_{CC} = 9.0 V	-	-	2.7	V

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

Table 7. Static characteristics for 74HC4053 *…continued*

Voltages are referenced to GND (ground = 0 V).
V_{is} is the input voltage at pins nYn or nZ, whichever is assigned as an input.
V_{os} is the output voltage at pins nZ or nYn, whichever is assigned as an output.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
I_I	input leakage current	V_{EE} = 0 V; V_I = V_{CC} or GND				
		V_{CC} = 6.0 V	-	-	±1.0	μA
		V_{CC} = 10.0 V	-	-	±2.0	μA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} − V_{EE}; see Figure 11				
		per channel	-	-	±1.0	μA
		all channels	-	-	±1.0	μA
$I_{S(ON)}$	ON-state leakage current	V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} − V_{EE}; V_{CC} = 10.0 V; V_{EE} = 0 V; see Figure 12	-	-	±1.0	μA
I_{CC}	supply current	V_{EE} = 0 V; V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC}; V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 6.0 V	-	-	160.0	μA
		V_{CC} = 10.0 V	-	-	320.0	μA

Table 8. Static characteristics for 74HCT4053

Voltages are referenced to GND (ground = 0 V).
V_{is} is the input voltage at pins nYn or nZ, whichever is assigned as an input.
V_{os} is the output voltage at pins nZ or nYn, whichever is assigned as an output.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_{amb} = 25 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 4.5 V to 5.5 V	2.0	1.6	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 4.5 V to 5.5 V	-	1.2	0.8	V
I_I	input leakage current	V_I = V_{CC} or GND; V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	±0.1	μA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} − V_{EE}; see Figure 11				
		per channel	-	-	±0.1	μA
		all channels	-	-	±0.1	μA
$I_{S(ON)}$	ON-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} − V_{EE}; see Figure 12	-	-	±0.1	μA
I_{CC}	supply current	V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC}; V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	8.0	μA
		V_{CC} = 5.0 V; V_{EE} = –5.0 V	-	-	16.0	μA
ΔI_{CC}	additional supply current	per input; V_I = V_{CC} − 2.1 V; other inputs at V_{CC} or GND; V_{CC} = 4.5 V to 5.5 V; V_{EE} = 0 V	-	50	180	μA
C_I	input capacitance		-	3.5	-	pF
C_{sw}	switch capacitance	independent pins nYn	-	5	-	pF
		common pins nZ	-	8	-	pF

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.


Table 8. Static characteristics for 74HCT4053 *…continued*

Voltages are referenced to GND (ground = 0 V).
V_{is} is the input voltage at pins nYn or nZ, whichever is assigned as an input.
V_{os} is the output voltage at pins nZ or nYn, whichever is assigned as an output.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_{amb} = −40 °C to +85 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 4.5 V to 5.5 V	2.0	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 4.5 V to 5.5 V	-	-	0.8	V
I_I	input leakage current	V_I = V_{CC} or GND; V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	±1.0	μA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\| = V_{CC} - V_{EE}$; see Figure 11				
		per channel	-	-	±1.0	μA
		all channels	-	-	±1.0	μA
$I_{S(ON)}$	ON-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\| = V_{CC} - V_{EE}$; see Figure 12	-	-	±1.0	μA
I_{CC}	supply current	V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC}; V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	80.0	μA
		V_{CC} = 5.0 V; V_{EE} = −5.0 V	-	-	160.0	μA
ΔI_{CC}	additional supply current	per input; V_I = V_{CC} − 2.1 V; other inputs at V_{CC} or GND; V_{CC} = 4.5 V to 5.5 V; V_{EE} = 0 V	-	-	225	μA
T_{amb} = −40 °C to +125 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 4.5 V to 5.5 V	2.0	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 4.5 V to 5.5 V	-	-	0.8	V
I_I	input leakage current	V_I = V_{CC} or GND; V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	±1.0	μA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\| = V_{CC} - V_{EE}$; see Figure 11				
		per channel	-	-	±1.0	μA
		all channels	-	-	±1.0	μA
$I_{S(ON)}$	ON-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\| = V_{CC} - V_{EE}$; see Figure 12	-	-	±1.0	μA
I_{CC}	supply current	V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC}; V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	160.0	μA
		V_{CC} = 5.0 V; V_{EE} = −5.0 V	-	-	320.0	μA
ΔI_{CC}	additional supply current	per input; V_I = V_{CC} − 2.1 V; other inputs at V_{CC} or GND; V_{CC} = 4.5 V to 5.5 V; V_{EE} = 0 V	-	-	245	μA

All information provided in this document is subject to legal disclaimers.


© NXP B.V. 2012. All rights reserved.

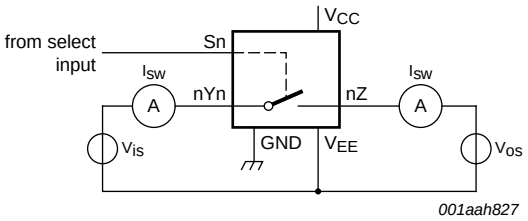

V_{is} = V_{CC} and V_{os} = V_{EE}.

V_{is} = V_{EE} and V_{os} = V_{CC}.

Fig 11. Test circuit for measuring OFF-state current

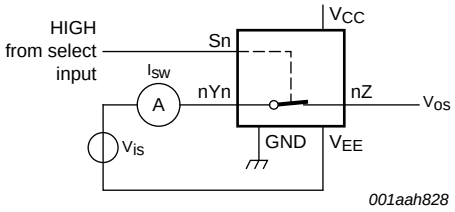

V_{is} = V_{CC} and V_{os} = open-circuit.

V_{is} = V_{EE} and V_{os} = open-circuit.

Fig 12. Test circuit for measuring ON-state current

11. Dynamic characteristics

Table 9. Dynamic characteristics for 74HC4053

GND = 0 V; t_r = t_f = 6 ns; C_L = 50 pF; for test circuit see Figure 15.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
T_{amb} = 25 °C							
t_{pd}	propagation delay	V_{is} to V_{os}; R_L = ∞ Ω; see Figure 13	[1]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	15	60	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	5	12	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	4	10	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	4	8	ns

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

Table 9. Dynamic characteristics for 74HC4053 *…continued*

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF; for test circuit see Figure 15.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
t_{on}	turn-on time	$\overline{E}$ to V_{os}; $R_L = \infty\ \Omega$; see Figure 14	[2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	60	220	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	20	44	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	17	-	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	16	37	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	15	31	ns
		Sn to V_{os}; $R_L = \infty\ \Omega$; see Figure 14	[2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	75	220	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	25	44	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	21	-	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	20	37	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	15	31	ns
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	63	210	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	21	42	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	18	-	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	17	36	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	15	29	ns
		Sn to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	60	210	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	20	42	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	17	-	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	16	36	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	15	29	ns
C_{PD}	power dissipation capacitance	per switch; V_I = GND to V_{CC}	[4]	-	36	-	pF
T_{amb} = −40 °C to +85 °C							
t_{pd}	propagation delay	V_{is} to V_{os}; $R_L = \infty\ \Omega$; see Figure 13	[1]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	-	75	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	15	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	-	13	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	10	ns

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

Table 9. Dynamic characteristics for 74HC4053 *...continued*

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF; for test circuit see Figure 15.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = ∞ Ω; see Figure 14	[2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	-	275	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	55	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	-	47	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	39	ns
		Sn to V_{os}; R_L = ∞ Ω; see Figure 14	[2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	-	275	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	55	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	-	47	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	39	ns
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	-	265	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	53	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	-	45	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	36	ns
		Sn to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	-	265	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	53	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	-	45	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	36	ns
T_{amb} = −40 °C to +125 °C							
t_{pd}	propagation delay	V_{is} to V_{os}; R_L = ∞ Ω; see Figure 13	[1]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	-	90	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	18	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	-	15	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	12	ns
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = ∞ Ω; see Figure 14	[2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	-	330	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	66	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	-	56	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	47	ns
		Sn to V_{os}; R_L = ∞ Ω; see Figure 14	[2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	-	330	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	66	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	-	56	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	47	ns

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

Table 9. Dynamic characteristics for 74HC4053 *...continued*

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF; for test circuit see Figure 15.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	-	315	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	63	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	-	54	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	44	ns
		Sn to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V		-	-	315	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	63	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	-	54	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	44	ns

[1] t_{pd} is the same as t_{PHL} and t_{PLH}.

[2] t_{on} is the same as t_{PZH} and t_{PZL}.

[3] t_{off} is the same as t_{PHZ} and t_{PLZ}.

[4] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).
$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma\{(C_L + C_{sw}) \times V_{CC}^2 \times f_o\}$ where:
f_i = input frequency in MHz;
f_o = output frequency in MHz;
N = number of inputs switching;
$\Sigma\{(C_L + C_{sw}) \times V_{CC}^2 \times f_o\}$ = sum of outputs;
C_L = output load capacitance in pF;
C_{sw} = switch capacitance in pF;
V_{CC} = supply voltage in V.

Table 10. Dynamic characteristics for 74HCT4053

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF; for test circuit see Figure 15.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
T_{amb} = 25 °C							
t_{pd}	propagation delay	V_{is} to V_{os}; R_L = ∞ Ω; see Figure 13	[1]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	5	12	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	4	8	ns
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Figure 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	27	48	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	23	-	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	16	34	ns
		Sn to V_{os}; R_L = 1 kΩ; see Figure 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	25	48	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	21	-	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	16	34	ns

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

Table 10. Dynamic characteristics for 74HCT4053 *...continued*

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF; for test circuit see Figure 15.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	24	44	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	20	-	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	15	31	ns
		Sn to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	22	44	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	19	-	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	15	31	ns
C_{PD}	power dissipation capacitance	per switch; V_I = GND to V_{CC} − 1.5 V	[4]	-	36	-	pF
T_{amb} = −40 °C to +85 °C							
t_{pd}	propagation delay	V_{is} to V_{os}; R_L = ∞ Ω; see Figure 13	[1]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	15	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	10	ns
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Figure 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	60	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	43	ns
		Sn to V_{os}; R_L = 1 kΩ; see Figure 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	60	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	43	ns
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	55	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	39	ns
		Sn to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	55	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	39	ns
T_{amb} = −40 °C to +125 °C							
t_{pd}	propagation delay	V_{is} to V_{os}; R_L = ∞ Ω; see Figure 13	[1]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	18	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	12	ns
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Figure 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	72	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	51	ns
		Sn to V_{os}; R_L = 1 kΩ; see Figure 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	72	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	51	ns

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

Table 10. Dynamic characteristics for 74HCT4053 *…continued*

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF; for test circuit see Figure 15.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	66	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	47	ns
		Sn to V_{os}; R_L = 1 kΩ; see Figure 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	66	ns
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	-	47	ns

[1] t_{pd} is the same as t_{PHL} and t_{PLH}.

[2] t_{on} is the same as t_{PZH} and t_{PZL}.

[3] t_{off} is the same as t_{PHZ} and t_{PLZ}.

[4] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).
$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma\{(C_L + C_{sw}) \times V_{CC}^2 \times f_o\}$ where:
f_i = input frequency in MHz;
f_o = output frequency in MHz;
N = number of inputs switching;
$\Sigma\{(C_L + C_{sw}) \times V_{CC}^2 \times f_o\}$ = sum of outputs;
C_L = output load capacitance in pF;
C_{sw} = switch capacitance in pF;
V_{CC} = supply voltage in V.


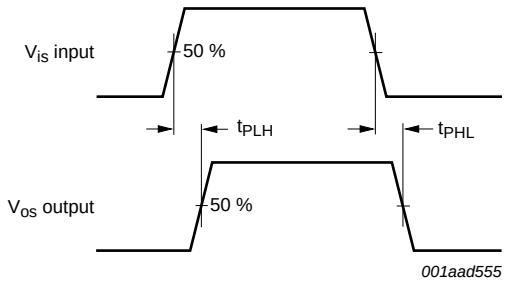


Fig 13. Input (V_{is}) to output (V_{os}) propagation delays

All information provided in this document is subject to legal disclaimers.


© NXP B.V. 2012. All rights reserved.

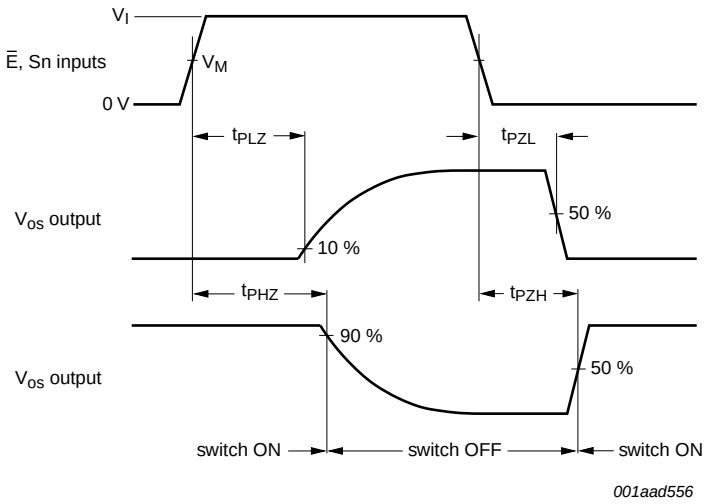

For 74HC4053: $V_M = 0.5 \times V_{CC}$.

For 74HCT4053: $V_M = 1.3$ V.

Fig 14. Turn-on and turn-off times

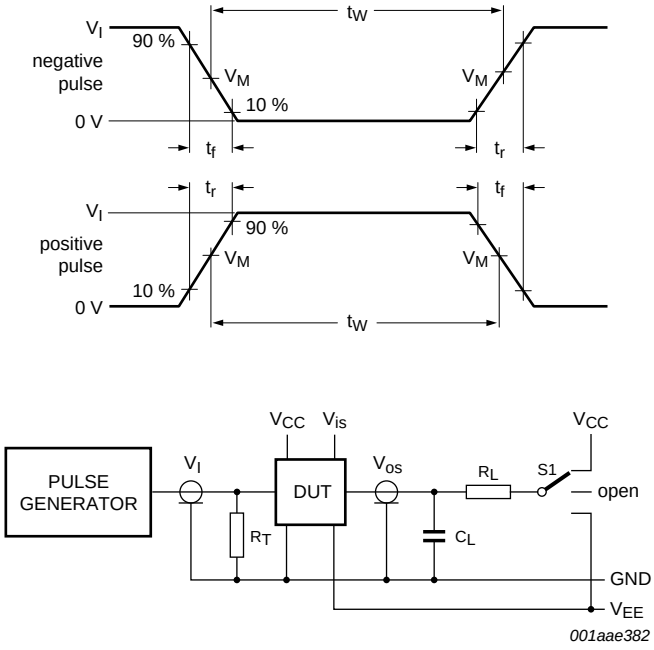

Definitions for test circuit; see Table 11:

R_T = termination resistance should be equal to the output impedance Z_o of the pulse generator.

C_L = load capacitance including jig and probe capacitance.

R_L = load resistance.

S1 = Test selection switch.

Fig 15. Test circuit for measuring AC performance

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

Table 11. Test data

Test	Input				Load		S1 position
	V_I	V_{is}	t_r, t_f		C_L	R_L	
			at f_{max}	other[1]			
t_{PHL}, t_{PLH}	[2]	pulse	< 2 ns	6 ns	50 pF	1 kΩ	open
t_{PZH}, t_{PHZ}	[2]	V_{CC}	< 2 ns	6 ns	50 pF	1 kΩ	V_{EE}
t_{PZL}, t_{PLZ}	[2]	V_{EE}	< 2 ns	6 ns	50 pF	1 kΩ	V_{CC}

[1] $t_r = t_f$ = 6 ns; when measuring f_{max}, there is no constraint to t_r and t_f with 50 % duty factor.

[2] V_I values:

a) For 74HC4053: $V_I = V_{CC}$

b) For 74HCT4053: V_I = 3 V

11.1 Additional dynamic characteristics

Table 12. Additional dynamic characteristics

Recommended conditions and typical values; GND = 0 V; T_{amb} = 25 °C; C_L = 50 pF.
V_{is} is the input voltage at pins nYn or nZ, whichever is assigned as an input.
V_{os} is the output voltage at pins nYn or nZ, whichever is assigned as an output.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
d_{sin}	sine-wave distortion	f_i = 1 kHz; R_L = 10 kΩ; see Figure 16					
		V_{is} = 4.0 V (p-p); V_{CC} = 2.25 V; V_{EE} = −2.25 V		-	0.04	-	%
		V_{is} = 8.0 V (p-p); V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	0.02	-	%
		f_i = 10 kHz; R_L = 10 kΩ; see Figure 16					
		V_{is} = 4.0 V (p-p); V_{CC} = 2.25 V; V_{EE} = −2.25 V		-	0.12	-	%
		V_{is} = 8.0 V (p-p); V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	0.06	-	%
α_{iso}	isolation (OFF-state)	R_L = 600 Ω; f_i = 1 MHz; see Figure 17					
		V_{CC} = 2.25 V; V_{EE} = −2.25 V	[1]	-	−50	-	dB
		V_{CC} = 4.5 V; V_{EE} = −4.5 V	[1]	-	−50	-	dB
Xtalk	crosstalk	between two switches/multiplexers; R_L = 600 Ω; f_i = 1 MHz; see Figure 18					
		V_{CC} = 2.25 V; V_{EE} = −2.25 V	[1]	-	−60	-	dB
		V_{CC} = 4.5 V; V_{EE} = −4.5 V	[1]	-	−60	-	dB
V_{ct}	crosstalk voltage	peak-to-peak value; between control and any switch; R_L = 600 Ω; f_i = 1 MHz; $\overline{E}$ or Sn square wave between V_{CC} and GND; $t_r = t_f$ = 6 ns; see Figure 19					
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	110	-	mV
		V_{CC} = 4.5 V; V_{EE} = −4.5 V		-	220	-	mV
$f_{(-3dB)}$	−3 dB frequency response	R_L = 50 Ω; see Figure 20					
		V_{CC} = 2.25 V; V_{EE} = −2.25 V	[2]	-	160	-	MHz
		V_{CC} = 4.5 V; V_{EE} = −4.5 V	[2]	-	170	-	MHz

[1] Adjust input voltage V_{is} to 0 dBm level (0 dBm = 1 mW into 600 Ω).

[2] Adjust input voltage V_{is} to 0 dBm level at V_{os} for 1 MHz (0 dBm = 1 mW into 50 Ω).

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.



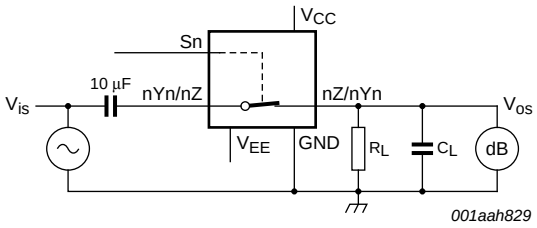


Fig 16. Test circuit for measuring sine-wave distortion

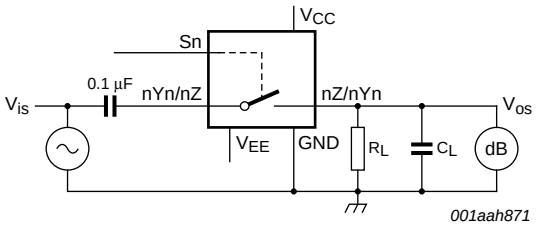

V_{CC} = 4.5 V; GND = 0 V; V_{EE} = −4.5 V; R_L = 600 Ω; R_S = 1 kΩ.

a. Test circuit

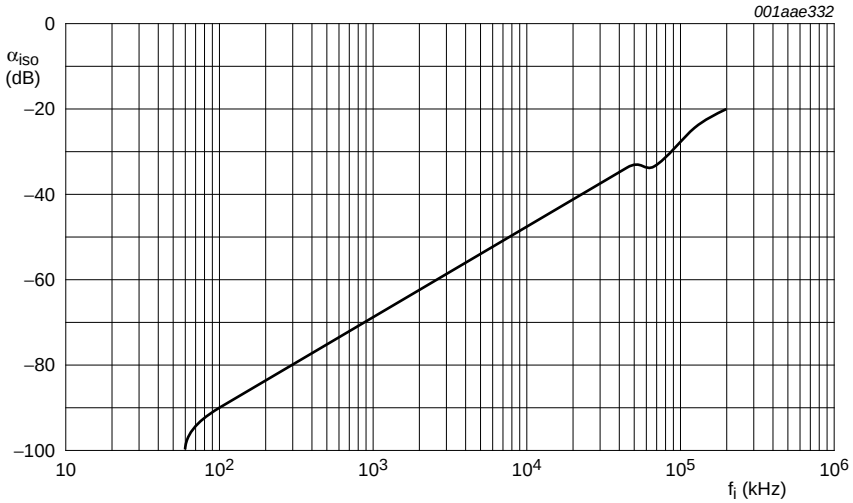

b. Isolation (OFF-state) as a function of frequency

Fig 17. Test circuit for measuring isolation (OFF-state)

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

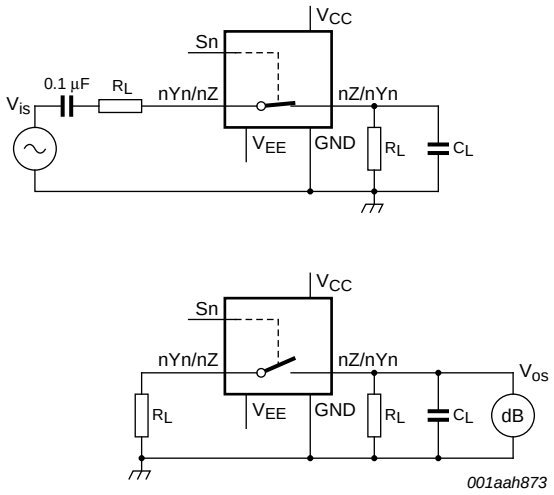


Fig 18. Test circuits for measuring crosstalk between any two switches/multiplexers


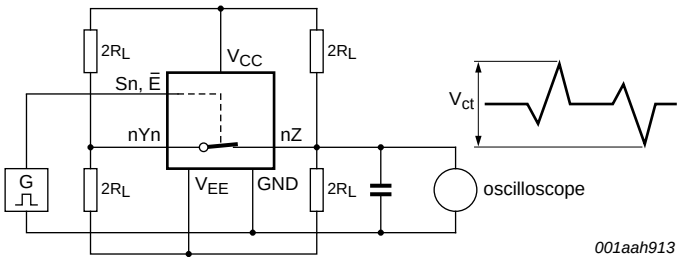


Fig 19. Test circuit for measuring crosstalk between control input and any switch


All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

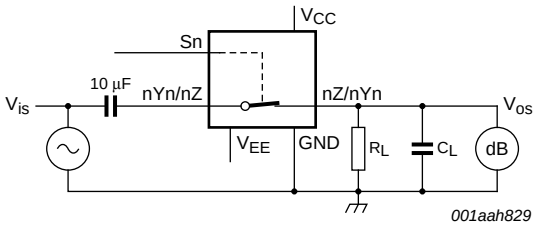

V_{CC} = 4.5 V; GND = 0 V; V_{EE} = −4.5 V; R_L = 50 Ω; R_S = 1 kΩ.

a. Test circuit

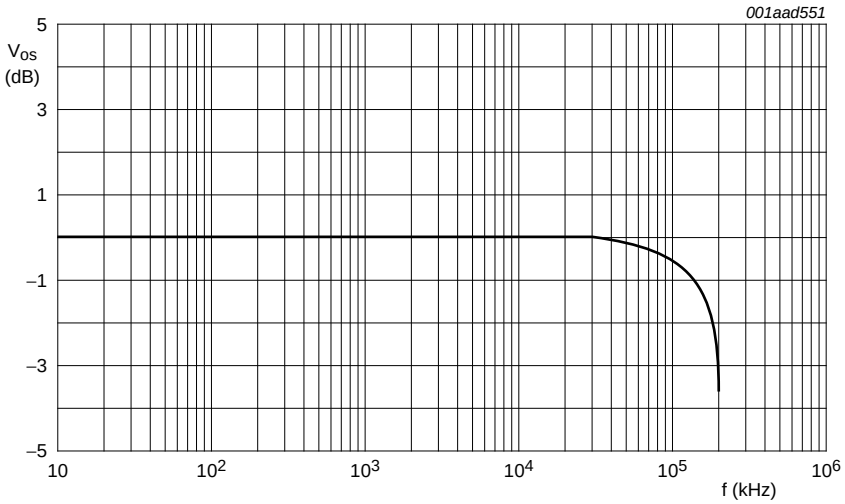

b. Typical frequency response


Fig 20. Test circuit for frequency response

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

12. Package outline

DIP16: plastic dual in-line package; 16 leads (300 mil) **SOT38-4**

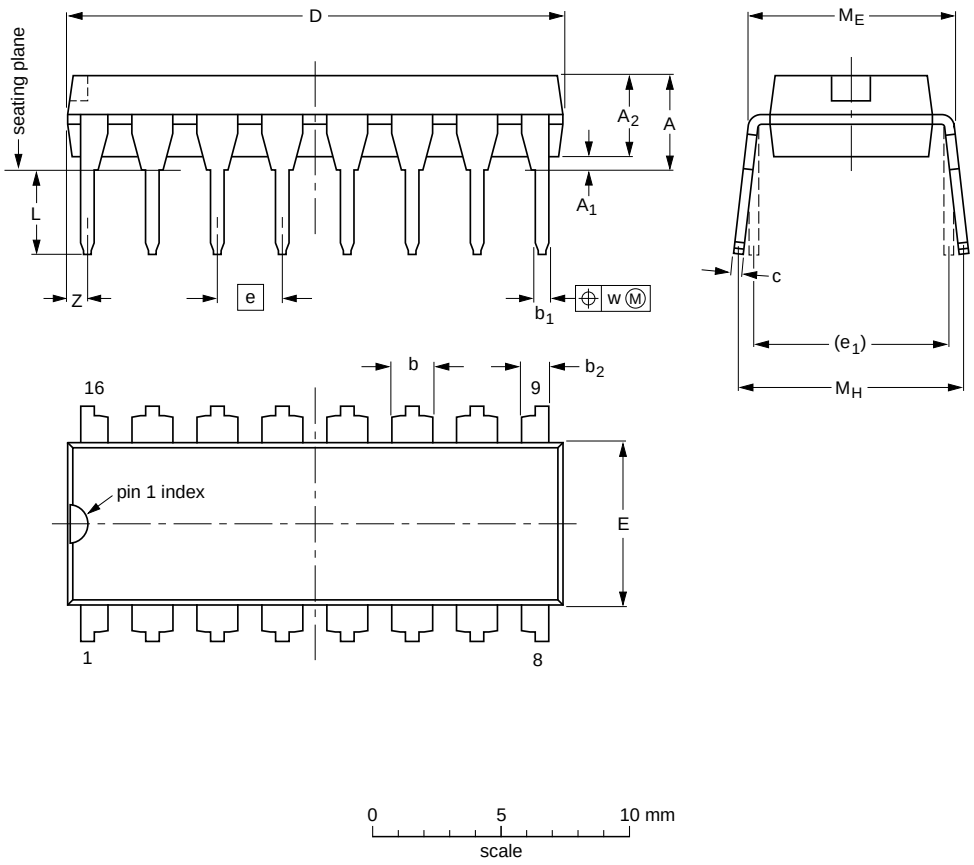

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A_1 min.	A_2 max.	b	b_1	b_2	c	D (1)	E (1)	e	e_1	L	M_E	M_H	w	Z (1) max.
mm	4.2	0.51	3.2	1.73 1.30	0.53 0.38	1.25 0.85	0.36 0.23	19.50 18.55	6.48 6.20	2.54	7.62	3.60 3.05	8.25 7.80	10.0 8.3	0.254	0.76
inches	0.17	0.02	0.13	0.068 0.051	0.021 0.015	0.049 0.033	0.014 0.009	0.77 0.73	0.26 0.24	0.1	0.3	0.14 0.12	0.32 0.31	0.39 0.33	0.01	0.03

Note

1. Plastic or metal protrusions of 0.25 mm (0.01 inch) maximum per side are not included.


OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT38-4						~~95-01-14~~ 03-02-13

Fig 21. Package outline SOT38-4 (DIP16)

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

SO16: plastic small outline package; 16 leads; body width 3.9 mm **SOT109-1**

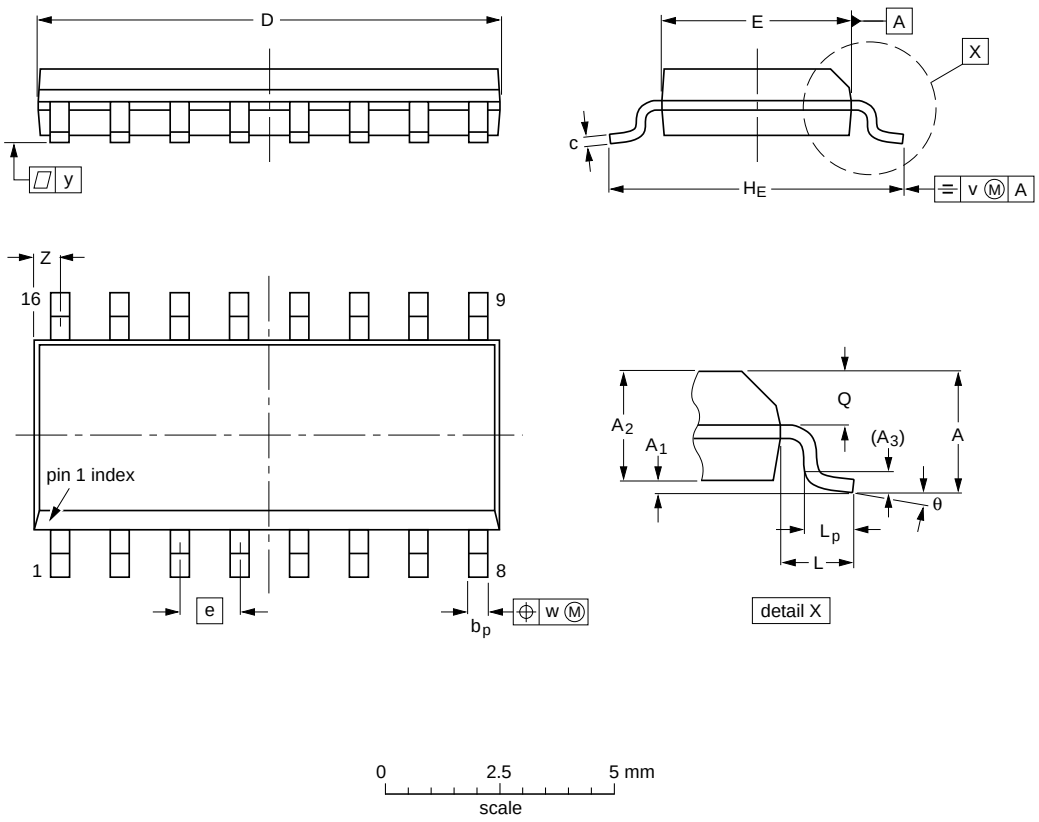

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A_1	A_2	A_3	b_p	c	$D^{(1)}$	$E^{(1)}$	e	H_E	L	L_p	Q	v	w	y	$Z^{(1)}$	θ
mm	1.75	0.25 0.10	1.45 1.25	0.25	0.49 0.36	0.25 0.19	10.0 9.8	4.0 3.8	1.27	6.2 5.8	1.05	1.0 0.4	0.7 0.6	0.25	0.25	0.1	0.7 0.3	8^o 0^o
inches	0.069	0.010 0.004	0.057 0.049	0.01	0.019 0.014	0.0100 0.0075	0.39 0.38	0.16 0.15	0.05	0.244 0.228	0.041	0.039 0.016	0.028 0.020	0.01	0.01	0.004	0.028 0.012	

Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.


OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT109-1	076E07	MS-012				~~99-12-27~~ 03-02-19

Fig 22. Package outline SOT109-1 (SO16)

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

SSOP16: plastic shrink small outline package; 16 leads; body width 5.3 mm **SOT338-1**

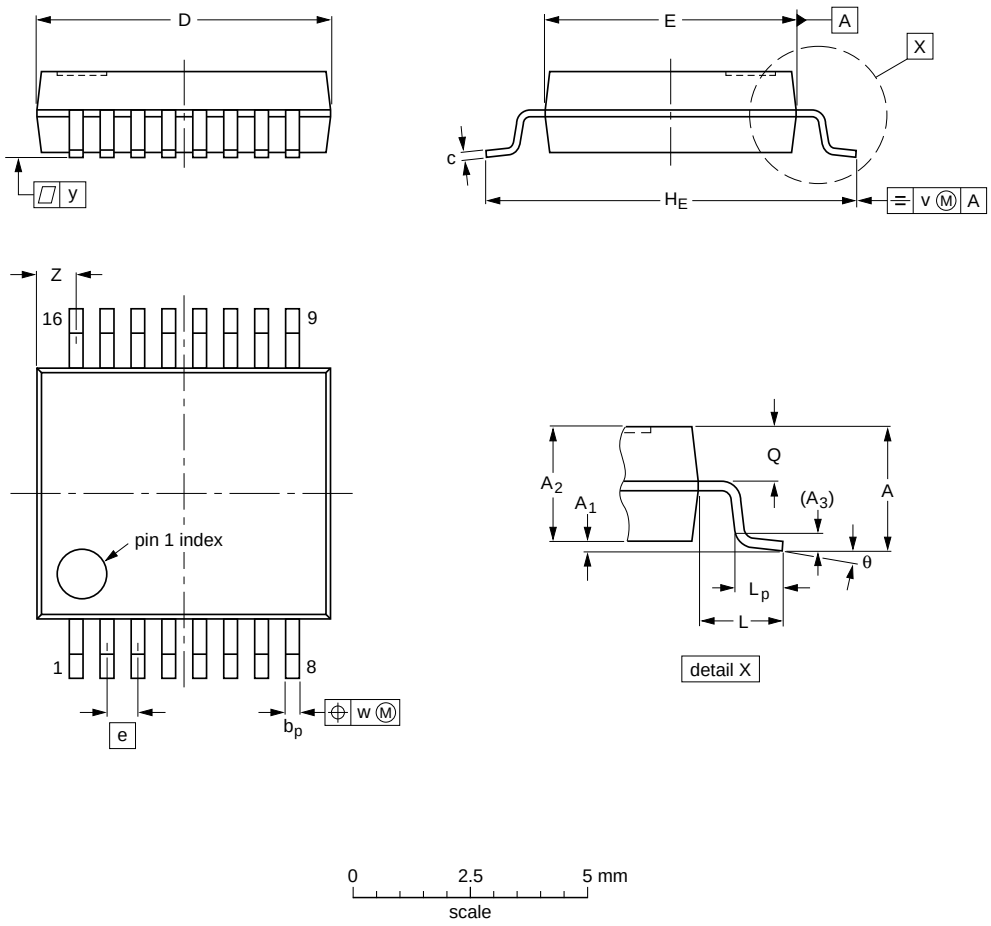

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A_1	A_2	A_3	b_p	c	D (1)	E (1)	e	H_E	L	L_p	Q	v	w	y	Z (1)	θ
mm	2	0.21 0.05	1.80 1.65	0.25	0.38 0.25	0.20 0.09	6.4 6.0	5.4 5.2	0.65	7.9 7.6	1.25	1.03 0.63	0.9 0.7	0.2	0.13	0.1	1.00 0.55	8^o 0^o

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.


OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT338-1		MO-150				~~99-12-27~~ 03-02-19

Fig 23. Package outline SOT338-1 (SSOP16)

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

TSSOP16: plastic thin shrink small outline package; 16 leads; body width 4.4 mm **SOT403-1**

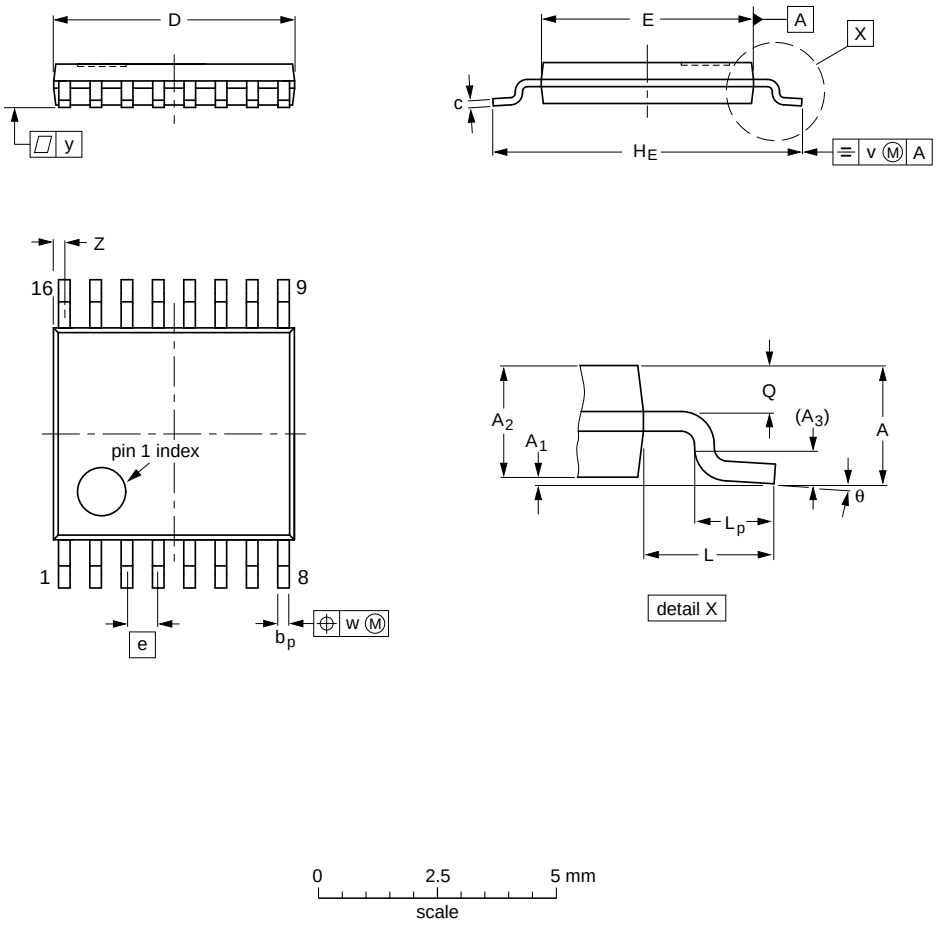

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A_1	A_2	A_3	b_p	c	D (1)	E (2)	e	H_E	L	L_p	Q	v	w	y	Z (1)	θ
mm	1.1	0.15 0.05	0.95 0.80	0.25	0.30 0.19	0.2 0.1	5.1 4.9	4.5 4.3	0.65	6.6 6.2	1	0.75 0.50	0.4 0.3	0.2	0.13	0.1	0.40 0.06	8^o 0^o

Notes

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.


OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT403-1		MO-153				~~99-12-27~~ 03-02-18

Fig 24. Package outline SOT403-1 (TSSOP16)

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

DHVQFN16: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 16 terminals; body 2.5 x 3.5 x 0.85 mm **SOT763-1**

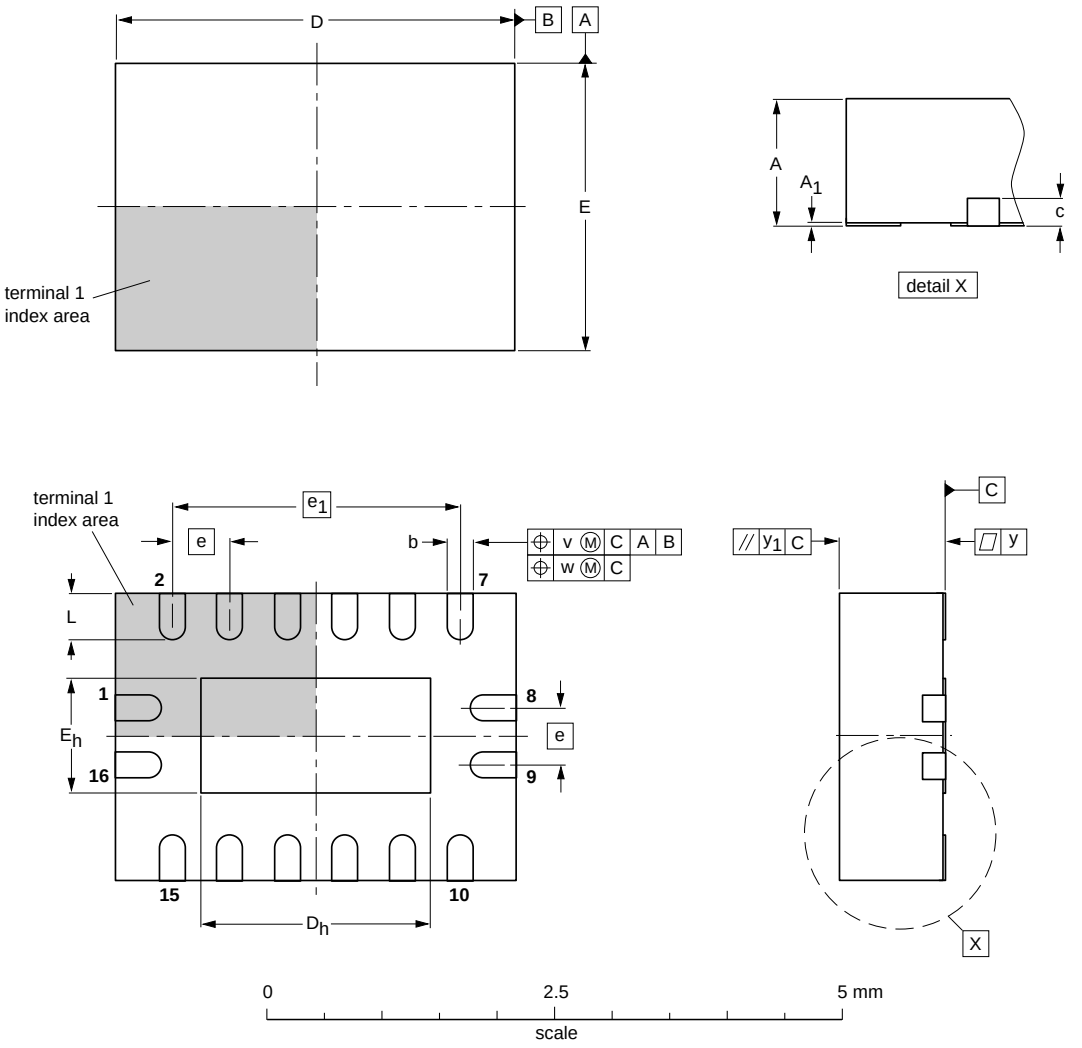

DIMENSIONS (mm are the original dimensions)

UNIT	$A^{(1)}$ max.	A_1	b	c	$D^{(1)}$	D_h	$E^{(1)}$	E_h	e	e_1	L	v	w	y	y_1
mm	1	0.05 0.00	0.30 0.18	0.2	3.6 3.4	2.15 1.85	2.6 2.4	1.15 0.85	0.5	2.5	0.5 0.3	0.1	0.05	0.05	0.1

Note

1. Plastic or metal protrusions of 0.075 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT763-1	- - -	MO-241	- - -			~~02-10-17~~ 03-01-27

Fig 25. Package outline SOT763-1 (DHVQFN16)

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

13. Abbreviations

Table 13. Abbreviations

Acronym	Description
CMOS	Complementary Metal-Oxide Semiconductor
ESD	ElectroStatic Discharge
HBM	Human Body Model
MM	Machine Model

14. Revision history

Table 14. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC_HCT4053 v.8	20120719	Product data sheet	-	74HC_HCT4053 v.7
Modifications:	• CDM added to features.			
74HC_HCT4053 v.7	20111213	Product data sheet	-	74HC_HCT4053 v.6
Modifications:	• Legal pages updated.			
74HC_HCT4053 v.6	20110511	Product data sheet	-	74HC_HCT4053 v.5
74HC_HCT4053 v.5	20110118	Product data sheet	-	74HC_HCT4053 v.4
74HC_HCT4053 v.4	20060509	Product data sheet	-	74HC_HCT4053 v.3
74HC_HCT4053 v.3	20060315	Product data sheet	-	74HC_HCT4053_CNV v.2
74HC_HCT4053_CNV v.2	19901201	Product specification	-	-

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

15. Legal information

15.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

15.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

15.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

16. Contact information

For more information, please visit: **http://www.nxp.com**

For sales office addresses, please send an email to: **salesaddresses@nxp.com**

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

17. Contents

1	**General description**	**1**
2	**Features and benefits**	**1**
3	**Applications**	**2**
4	**Ordering information**	**2**
5	**Functional diagram**	**3**
6	**Pinning information**	**4**
6.1	Pinning	4
6.2	Pin description	5
7	**Functional description**	**5**
8	**Limiting values**	**5**
9	**Recommended operating conditions**	**6**
10	**Static characteristics**	**7**
11	**Dynamic characteristics**	**13**
11.1	Additional dynamic characteristics	20
12	**Package outline**	**24**
13	**Abbreviations**	**29**
14	**Revision history**	**29**
15	**Legal information**	**30**
15.1	Data sheet status	30
15.2	Definitions	30
15.3	Disclaimers	30
15.4	Trademarks	31
16	**Contact information**	**31**
17	**Contents**	**32**

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2012. **All rights reserved.**

For more information, please visit: http://www.nxp.com
For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 19 July 2012
Document identifier: 74HC_HCT4053