



DESCRIPTION: M5 FEMALE - FRONT PANEL MOUNT - SOLDER CUP - 4 POSITION

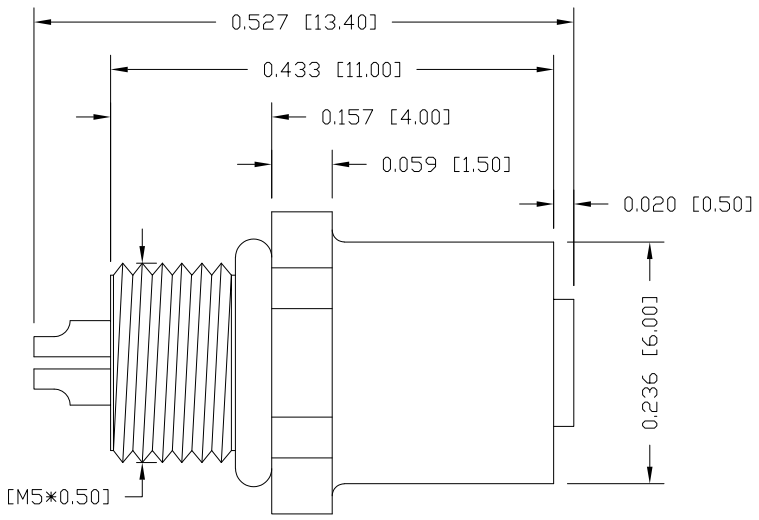


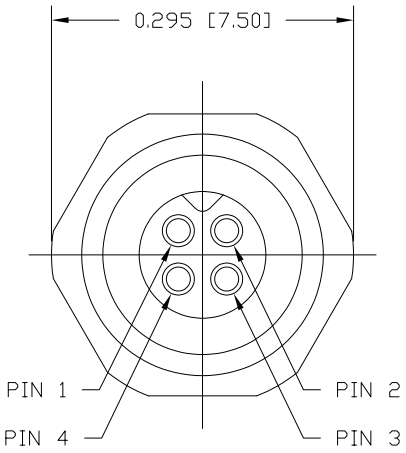

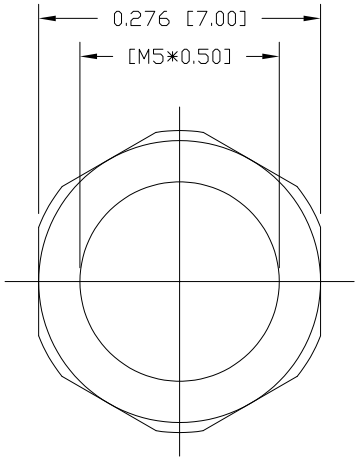

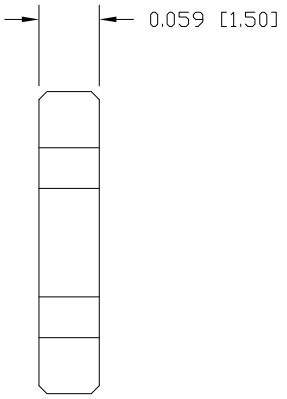

NUT



RECOMMEND PANEL CUT-OUT
MAX. PANEL THICKNESS: 0.075" [2.00]

SPECIFICATIONS:

MATERIALS:

HOUSING:	PBT, UL94 V-0, BLACK
CONTACTS:	GOLD PLATED BRASS
NUT:	SEE P/N KEY BELOW
SHELL:	SEE P/N KEY BELOW
ORING:	NBR, BLACK

ELECTRICAL:

RATED CURRENT:	1A
RATED VOLTAGE:	60V
INSULATION RESISTANCE:	100 MOhms MIN.
CONTACT RESISTANCE:	10 mOhms MAX.

ENVIRONMENT:


OPERATING TEMPERATURE:	-40°C TO +85°C
WATER PROOF:	IP67

WIRE AWG:	28 AWG MAX RECOMMENDED

851-004-20YR00Y

3 = BRASS/NICKEL SHELL AND NUT
S = 316 STAINLESS STEEL SHELL AND NUT

1 = GOLD FLASH
4 = 10µ" GOLD

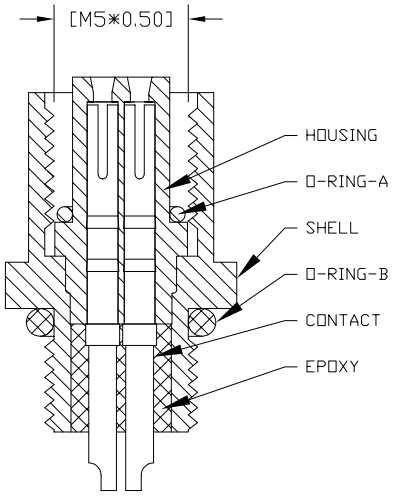

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: M. SIGMON

DATE: 03/04/2016

NorComp

SCALE: NTS

SHEET 1 OF 1

REV 7

DWG NO. 851-004-203R00Y