DESCRIPTION: M5 MALE - RIGHT ANGLE - 4 POSITION

SPECIFICATIONS:

MATERIALS:


HOUSING:	PBT, UL94 V-0, BLACK
CONTACTS:	GOLD PLATED BRASS (SEE P/N KEY BELOW)
NUT:	NICKEL PLATED BRASS
SHELL:	NICKEL PLATED BRASS
ORING:	EPDM, BLACK


ELECTRICAL:

RATED CURRENT:	1A
RATED VOLTAGE:	60V
INSULATION RESISTANCE:	100 MOhms MIN.
CONTACT RESISTANCE:	10 mOhms MAX.

ENVIRONMENT:


OPERATING TEMPERATURE:	-40°C TO +85°C
WATER PROOF:	IP67

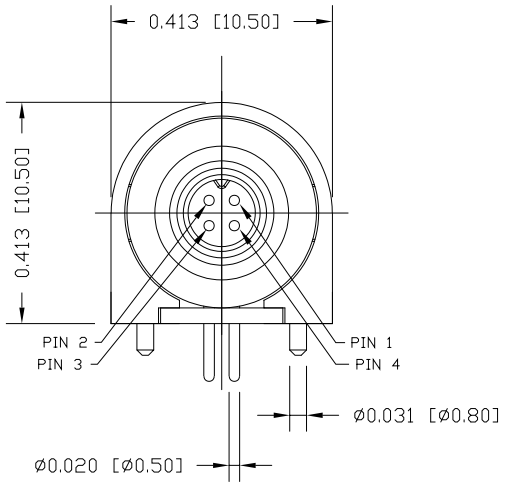

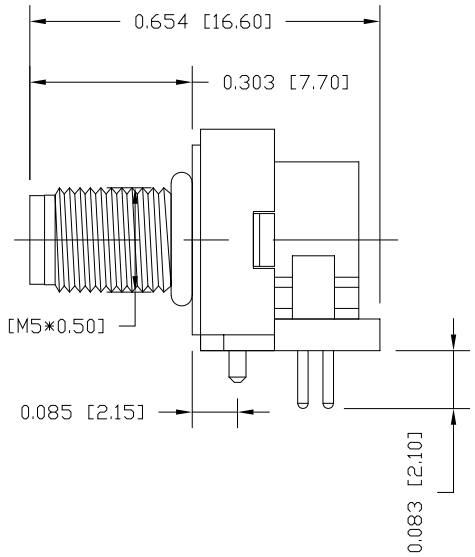


853-004-113R00Y


1 = GOLD FLASH
4 = 10u" GOLD

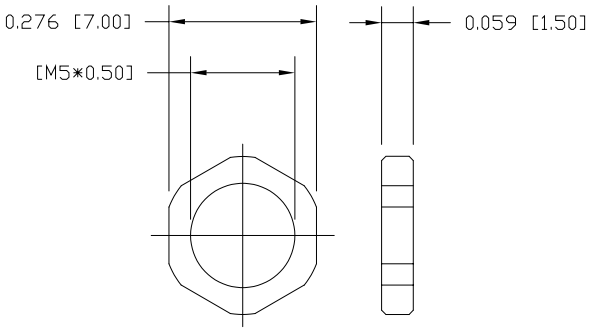

NUT



RECOMMEND PANEL CUT-OUT
MAX. PANEL THICKNESS: 0.063" [1.60]

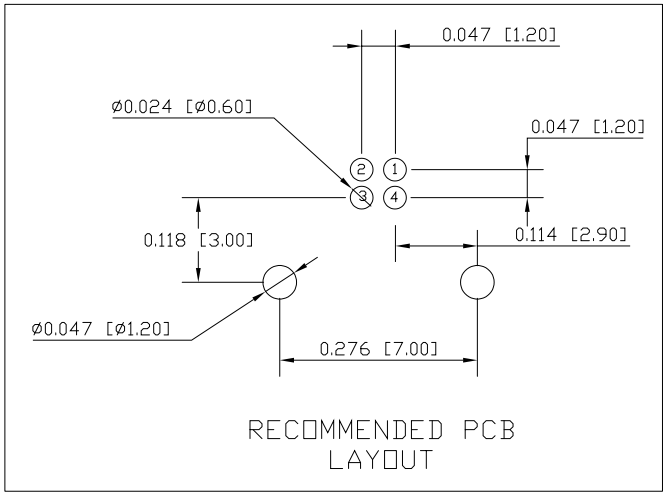

RECOMMENDED PCB LAYOUT

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	M. SIGMON
DATE:	03/04/2016

NorComp

SCALE:	SHEET	OF	REV
NTS	1	1	9

DWG NO. 853-004-113R00Y