

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
ICF5	0.97 LB/100 PCS. (440g/100 PCS.)

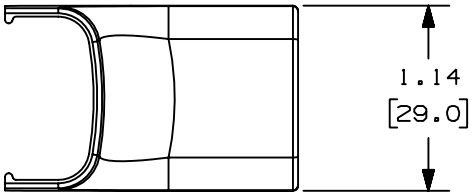

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. DIMENSIONS IN PARENTHESIS ARE IN METRIC.

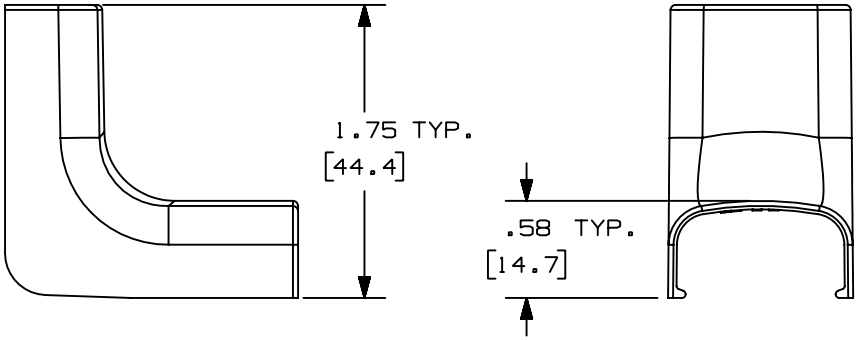

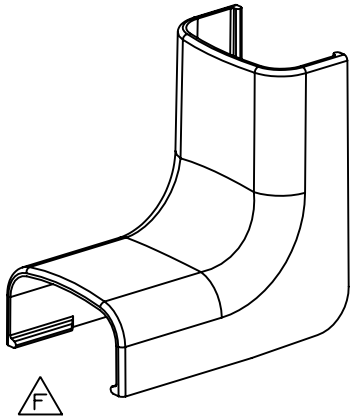

REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	SUP
6	7-3-02	JHNU	RMHI	F. REVISED MATERIAL IN DRAWING TITLE BLOCK.	16864 RGRO	RGRO	
5	8-28-00	MSO	HIW	E. REVISED AND REDRAWN ON CAD.	16864 HIW	HIW	
4	10-3-91	DW	CF	D. REVISED NOTE AND REMOVED COLOR FROM DRAWING.	16864	CF	
3	2-28-91	DW	CF	C. REVISED COLORS: OMIT BG, LI, LG. ADDED INT. WHITE AND INT. GRAY.	16864	WJB	
2	12-2-87	LDB	WJB	B. ADDED PART NUMBERS ICF5EI AND ICF5LI.	16864	WJB	
1	5-14-82	KJS	JK	A. POLYSTYRENE WAS ABS.		JAK	
R	9-14-81	KJS	HP	DRAWING RELEASED		HP	

CAD FILENAME/LAYERS: D34474BD_DC_ICF5_01.prt

PANDUIT CORP. TINLEY PARK, ILLINOIS

INSIDE CORNER FITTING (ICF5)
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ±.03(.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: KJS
DATE: 9-2-81
CHK'D: JK (A)
MAT'L: ABS (F)
SCALE: FULL
DRAWING NO.: SS-16864
DWG SIZE: A