

DESCRIPTION: M12 MALE - CABLE MOUNT - 5 POS. - L CODE

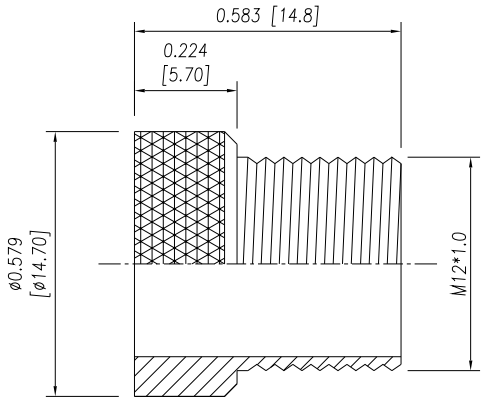

NUT

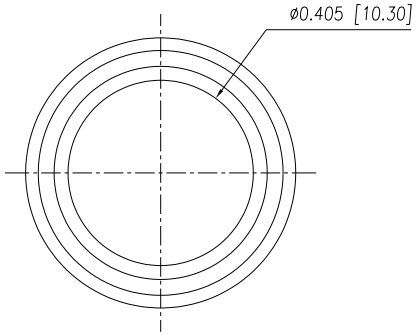

SPECIFICATIONS:

MATERIALS:


HOUSING:	PA66, UL94 V-0, BLACK
CONTACTS:	GOLD PLATED BRASS (SEE P/N KEY BELOW)
NUT:	(SEE P/N KEY BELOW)
SHELL:	(SEE P/N KEY BELOW)


ELECTRICAL:

RATED CURRENT:	16A
RATED VOLTAGE:	63V
INSULATION RESISTANCE:	100 MOhms MIN.
CONTACT RESISTANCE:	10 mOhms MAX.

ENVIRONMENT:

OPERATING TEMPERATURE:	-40°C TO +105°C
WATER PROOF:	IP67
MAX WIRE AWG:	14

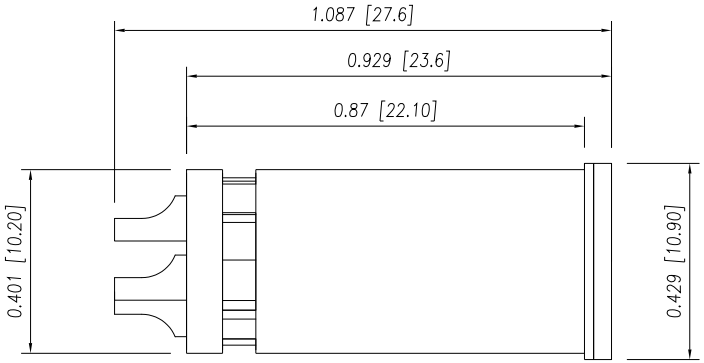

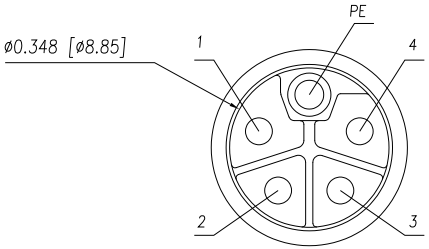

858-LP5-103RLSY

3 = BRASS/TIN (B/T) SHELL & NUT
S = STAINLESS STEEL (SS) SHELL & NUT
T = B/T SHELL & SS NUT

1 = GOLD FLASH
4 = 10u" GOLD

Full stainless steel variant successfully passes 96-hour salt spray testing per ASTM B117

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	J. KADEL
DATE:	08/01/2018

NorComp

SCALE: NTS	SHEET 1	OF 1	REV 5
DWG NO. 858-LP5-103RLS4			