

DESCRIPTION: M12 FEMALE - PANEL MOUNT (REAR) - 8 POS. - X-CODE

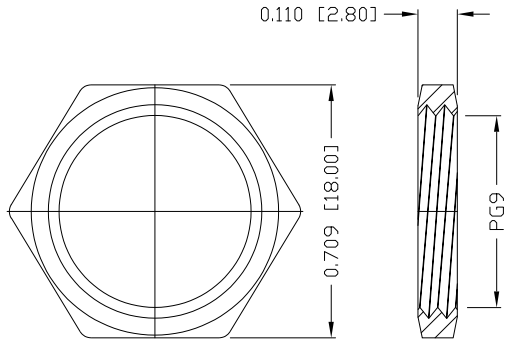

NUT



RECOMMEND PANEL CUT-OUT

SPECIFICATIONS:

MATERIALS:


HOUSING:	PA66, UL94 V-0, BLACK
CONTACTS:	GOLD PLATED BRASS (SEE P/N KEY BELOW)
NUT:	(SEE P/N KEY BELOW)
SHELL:	(SEE P/N KEY BELOW)
X-SHELL:	NICKEL PLATED ZINC ALLOY
ORING:	EPDM, BLACK


ELECTRICAL:

RATED CURRENT:	0.5A
RATED VOLTAGE:	50VAC/60VDC
INSULATION RESISTANCE:	100 MOhms MIN.
CONTACT RESISTANCE:	10 mOhms MAX.

ENVIRONMENT:

OPERATING TEMPERATURE:	-40°C TO +85°C
WATER PROOF:	IP67
MAX WIRE AWG:	24

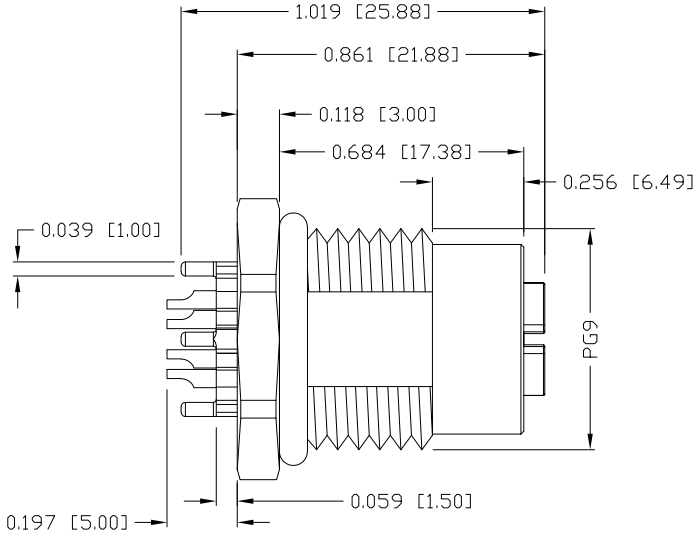

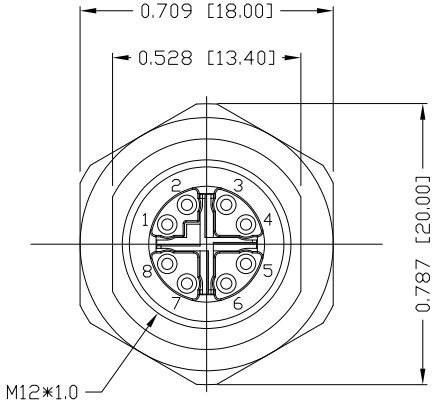

859-X08-203R004

3 = BRASS/NICKEL SHELL & NUT
S = STAINLESS STEEL SHELL & NUT

1 = GOLD FLASH
4 = 10u" GOLD

Full stainless steel variant successfully passes 96-hour salt spray testing per ASTM B117

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	M. SIGMON
DATE:	04/24/2017

NorComp

SCALE:	SHEET	OF	REV
NTS	1	1	7

DWG NO. 859-X08-203R004