


DRAWING MADE IN THIRD ANGLE PROJECTION
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F
BD	62		


REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPD
	F	REVISED PER EC 051A-0043-99	23AUG99	JG

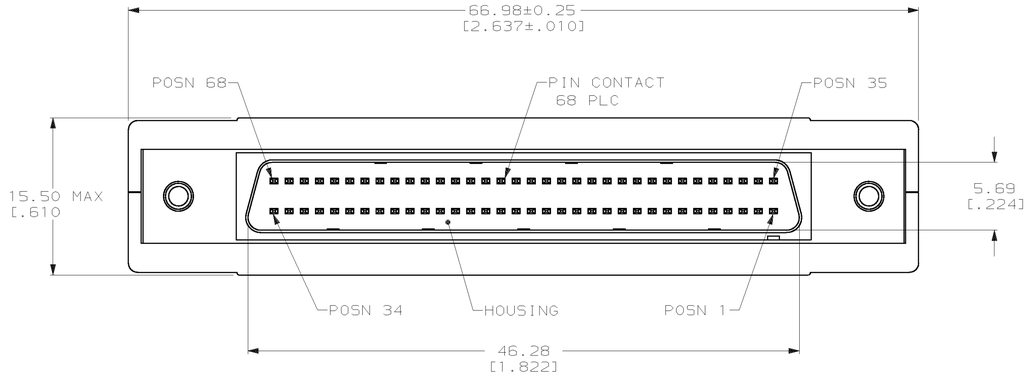

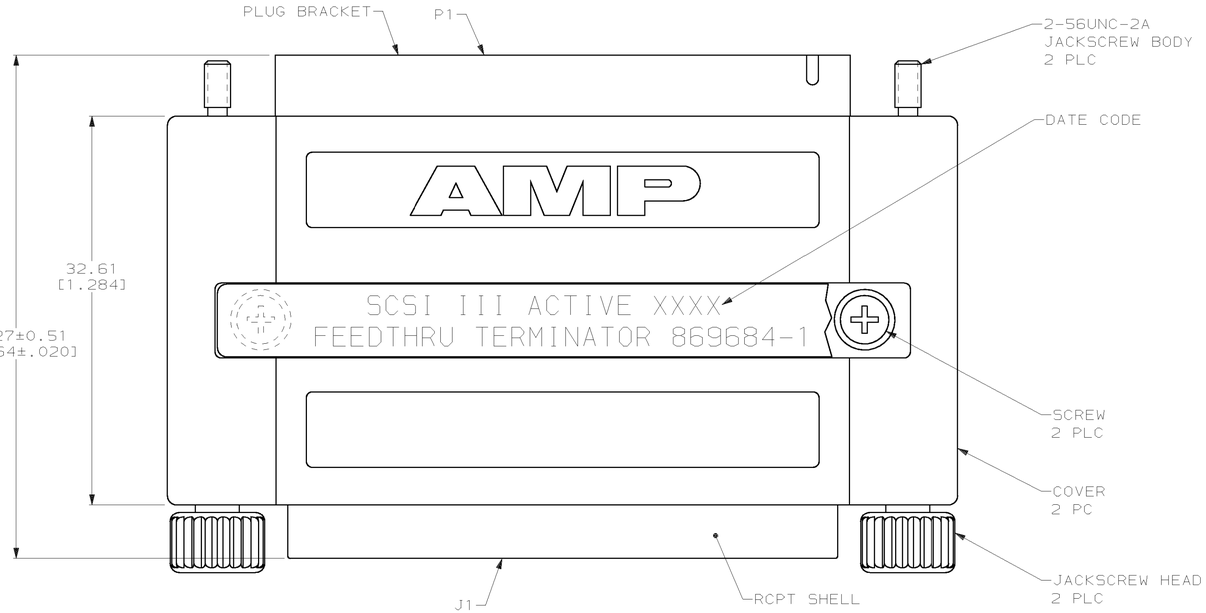

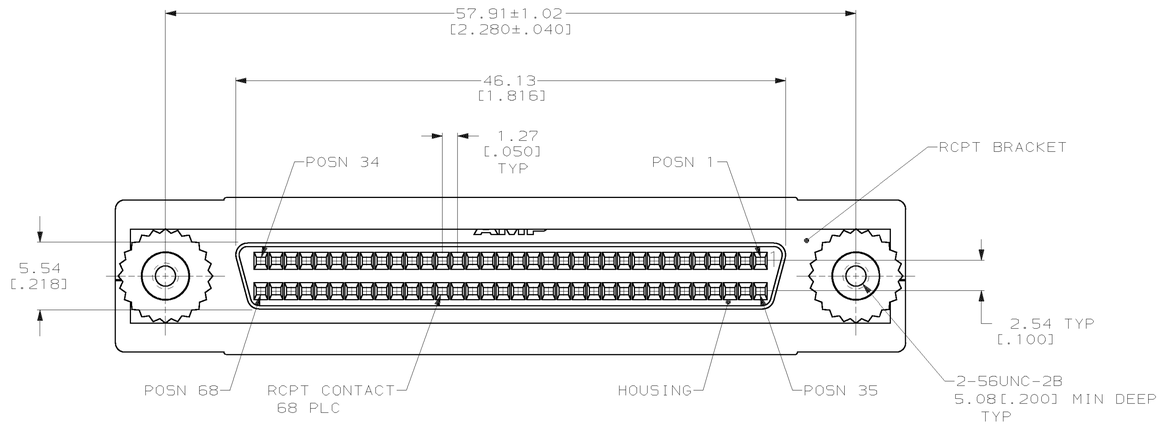

1. JACKSCREW BODIES: STAINLESS STEEL; SHELL AND SCREWS: CARBON STEEL; CONTACTS: PHOSPHOR BRONZE; HOUSINGS: POLYESTER, BLACK; SHIELD: COPPER; COVER: ABS, GREY, UL 94V-0; JACKSCREW HEADS: PVC, BEIGE; BRACKETS: ZINC; FLEX FILM CIRCUIT: COPPER ON KAPTON.
2. PASSIVATED.
3. 5.08µm[.000200] MIN TIN OR TIN-LEAD OVER 1.27µm[.000050] MIN COPPER.
4. PIN CONTACTS: 0.76µm[.000030] MIN GOLD FOR A LENGTH OF 3.35[.132] MIN FROM MATING END OVER 1.27µm[.000050] MIN NICKEL; RECEPTACLE CONTACTS: 0.76µm[.000030] MIN GOLD FOR A LENGTH OF 0.64[.025] MIN, 0.13[.005] MAX FROM MATING END OVER 1.27µm[.000050] MIN NICKEL.
5. 76.20µm[.003000] MIN CARBONITRIDE TEMPER.
6. 3.81µm[.000150] MIN NICKEL OVER 5.08µm[.000200] MIN COPPER.
7. C2, C3, AND C4: 4.7µFD TANTALUM CAPACITOR RATED 15 VOLTS MIN; C1: 2.2µFD TANTALUM CAPACITOR RATED 15 VOLTS MIN; CAPACITOR TOLERANCE: ±20%; U1, U2, AND U3: DS2107AS.

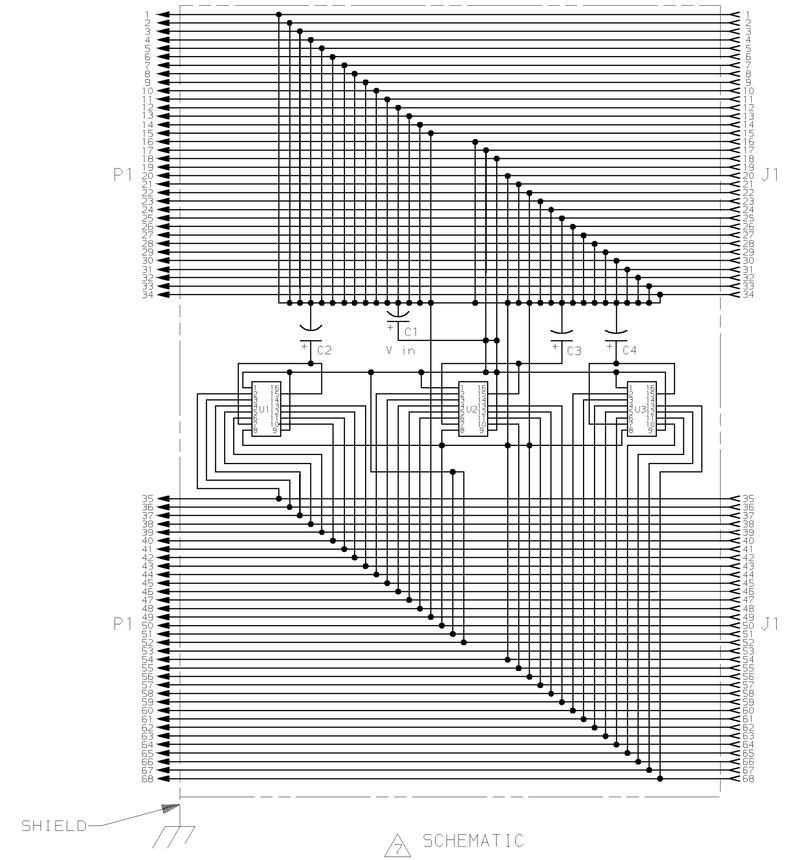

7 SCHEMATIC

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± 0.13[.005] ANGLES ± -	DR 2-3-93 J McCLINTON CHK 2-10-93 R. STONE APPD 2-15-93 W.D. FLESHMAN APPD 2-15-93 W.D. FLESHMAN
MATERIAL 1	PRODUCT SPEC -
FINISH SHELL: 3 CONTACTS: 4 SCREWS: 5 BRACKETS: 6 JACKSCREW BODIES: 2	APPLICATION SPEC -
	WEIGHT -

869684-1
PART NO

AMP Incorporated
Harrisburg, PA 17105-3608

NAME
ADAPTER ASSEMBLY, FEEDTHRU, ACTIVE, SCSI III, .050 SERIES AMPLIMITE™, TERMINATOR

SIZE	CAGE CODE	DRAWING NO
D	00779	C-869684
SCALE 4:1		SHEET 1 OF 1

CUSTOMER DRAWING