


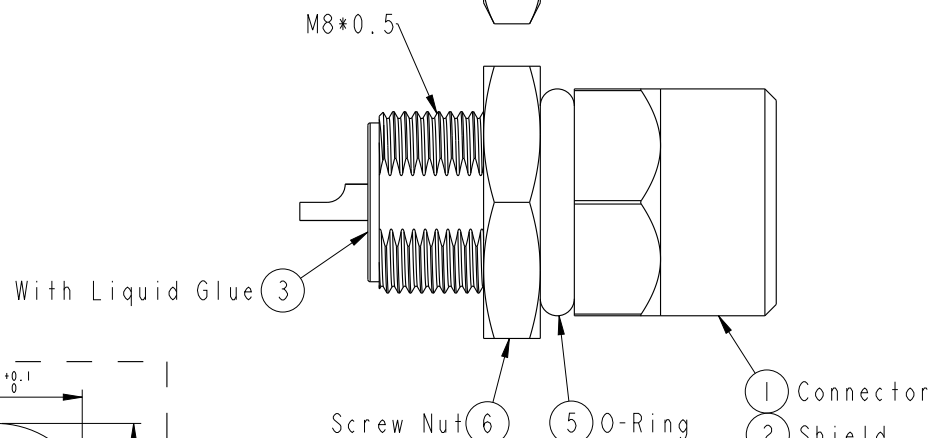


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191918	2019/10/31	JC Chen	△X1

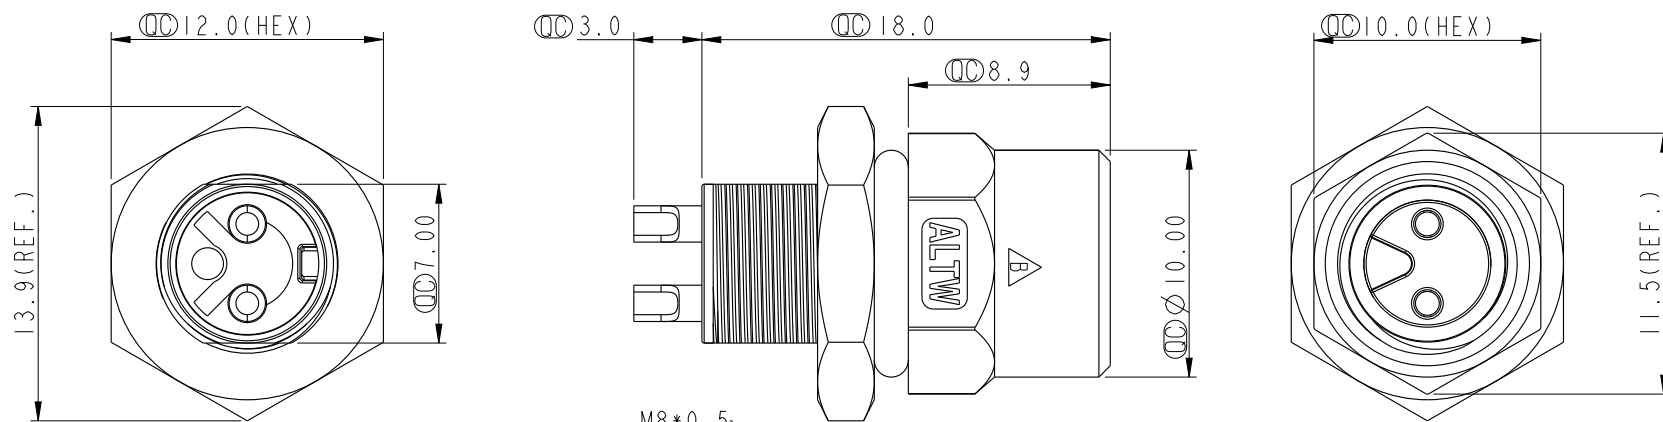

Pin Assignment
Front View



Recommended
Panel Cut-Out

Note:

- * $\varnothing$ Important Dimension.
- * Waterproof Rate: IP67.
- * Housing: Nylon+GF, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Shield: Zinc Alloy, Nickel Plated.
- * Screw Nut: Copper Alloy, Nickel Plated.
- * O-Ring1: Viton, Green.
- * O-Ring2: EPDM, Black.
- * For Panel Thickness Max 4.5mm.
- * Nut Torque: 4~6 kgf.cm.

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		M8 2Pin Panel F Conn. F Pin		8A-02PFFS-SH7001		Mila		2014-02-10	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X ± 0.25		3:1		8A-02PFFS-SH7001		Jimmy		2014-02-10	
.XX ± 0.1		SIZE		CUSTOMER		APPROVED BY		DATE	
.XXX ± 0.05		A4		ALTW		Jerry		2014-02-10	
ANGLES $\pm 1^\circ$		REV.							
		B							
		WC-REV.							
		A.6							
		$\varnothing$: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司