



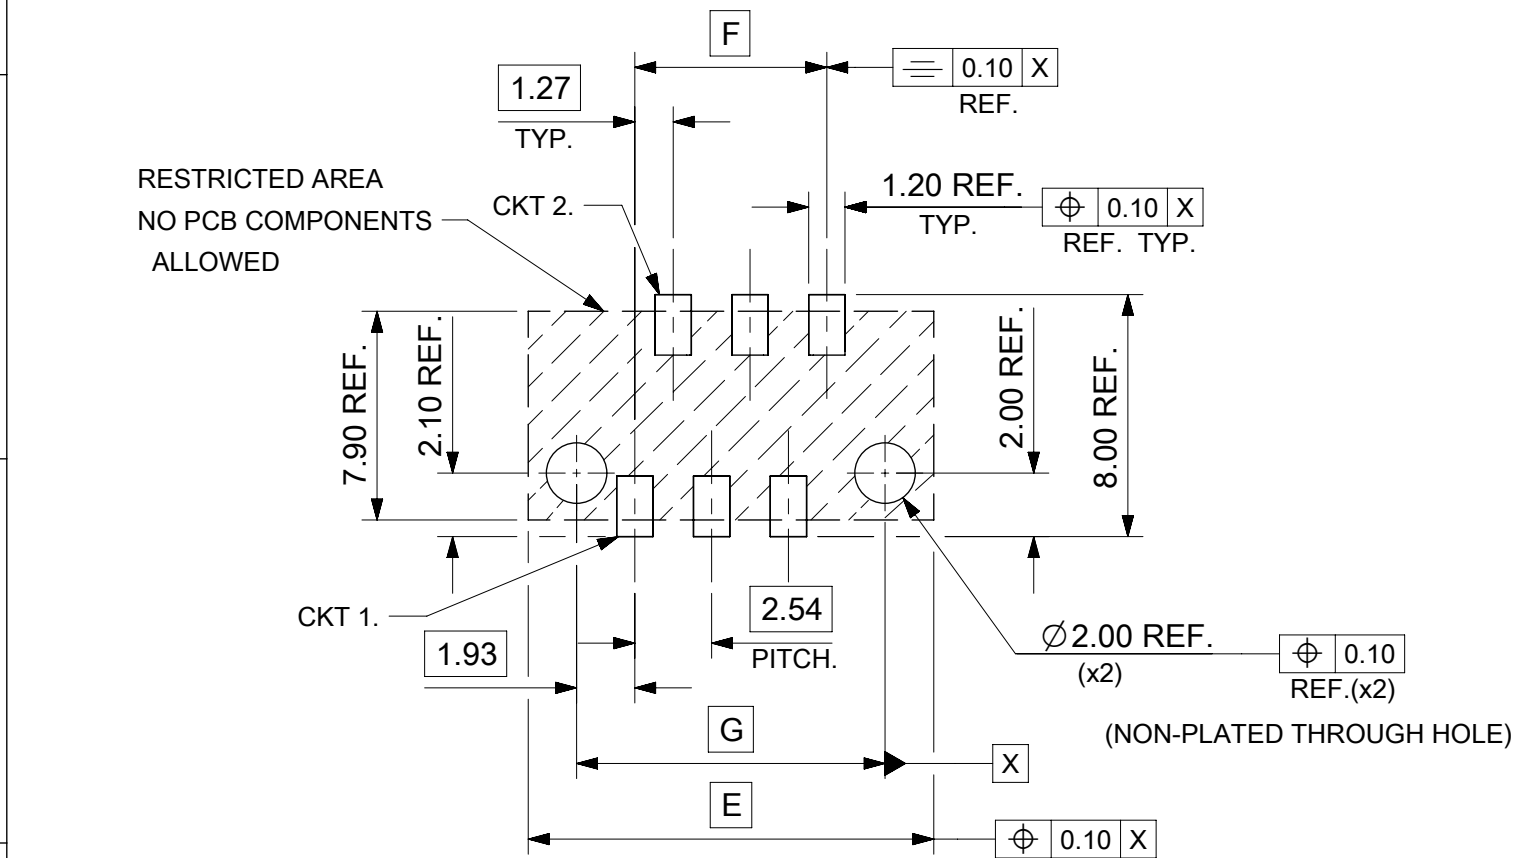

RECOMMENDED PCB THICKNESS 1.60±0.14
PCB LAYOUT FOR CLEARANCE FIT WITH PCB PEGS
HEADER VERSIONS 90816-*0**/*2**
VIEWED FROM COMPONENT SIDE
6CKT PART SHOWN FOR REFERENCE

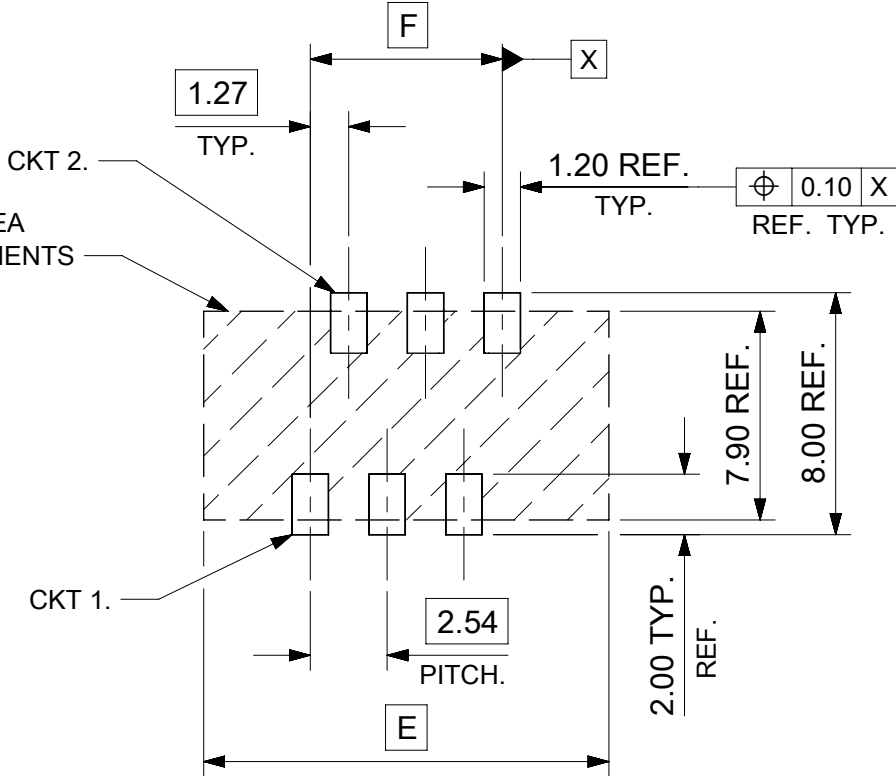

PCB LAYOUT WITHOUT PCB PEGS
HEADER VERSIONS 90816-*3**/*5**
VIEWED FROM COMPONENT SIDE
6CKT PART SHOWN FOR REFERENCE

90816-**26	26	38.80	31.75	35.60
90816-**24	24	36.26	29.21	33.06
90816-**22	22	33.72	26.67	30.52
90816-**20	20	31.18	24.13	27.98
90816-**18	18	28.64	21.59	25.44
90816-**16	16	26.10	19.05	22.90
90816-**14	14	23.56	16.51	20.36
90816-**12	12	21.02	13.97	17.82
90816-**10	10	18.48	11.43	15.28
90816-**08	8	15.94	8.89	12.74
90816-**06	6	13.40	6.35	10.20
90816-**04	4	10.86	3.81	7.66
PART NO.	NUMBER OF CKTS	DIM. E	DIM. F	DIM. G

DOCUMENT STATUS	P1	RELEASE DATE	2023/02/20	05:04:35
-----------------	----	--------------	------------	----------

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: CAD MIGRATION		<div>molex</div>			
<div><div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div><div>= 0</div></div>	mm		5:1							
<div><div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div><div>= 0</div></div>	GENERAL TOLERANCES (UNLESS SPECIFIED)				PICO FLEX SMT LATCHED HEADER					
<div><div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div><div>= 0</div></div>	ANGULAR TOL ± 2.0 °									
DIVISIONAL SYMBOLS	4 PLACES		±		EC NO: 738955		PRODUCT CUSTOMER DRAWING			
	3 PLACES		±		DRWN: GOWTHP 2023/02/02					
	2 PLACES		± 0.25		CHK'D: GOWTHP 2023/02/16					
	1 PLACE		± 0.35		APPR: ISHWARG 2023/02/20					
	0 PLACES		±		INITIAL REVISION:					
					DRWN: DBYRNES 2008/08/26					
				APPR: EFOLAN 2010/11/04		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
						SD-90816-001		PSD	001	G1