

RECOMMENDED
PANEL OPENING

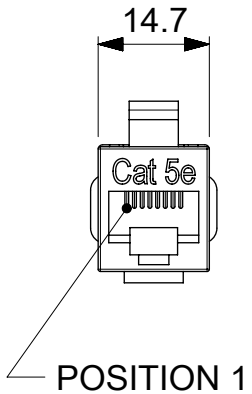

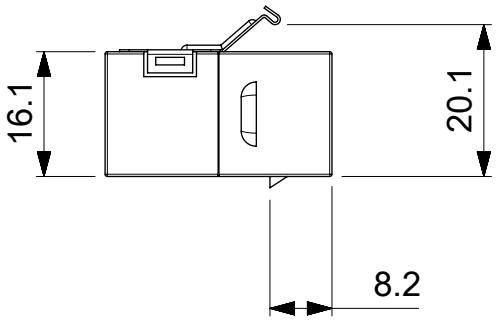





WIRING	
PIN1	PIN1
PIN2	PIN2
PIN3	PIN3
PIN4	PIN4
PIN5	PIN5
PIN6	PIN6
PIN7	PIN7
PIN8	PIN8
SHIELD	SHIELD



MATERIAL	
HOUSING	ABS, UL94V-0
CONTACTS	PHOSPHOR BRONZE TIN PLATED
CONTACT PLATING	GOLD,OVER NICKEL PLATE
SHIELD	BRONZE WITH NICKEL PLATE
ELECTRICAL	
DC CURRENT RATING	1A
VOLTAGE RATING	50V AC/DC
MISCELLANEOUS	
RATING	CATEGORY 5E (EIA /TIA CAT 5E)
ALL DIMENSIONS ARE FOR REFERENCE ONLY	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

QUALITY SYMBOLS
E = 0
F = 0
G = 0
▼ = 0
C = 0
☒ = 0
■ = 0
▽ = 0

EC NO: 168789
DRWN: AKHEMIRI 2017/11/28
CHK'D: DMERONI 2017/11/29
APPR: AMELZI 2017/11/29

REV: A

GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± °
4 PLACES ±
3 PLACES ±
2 PLACES ±
1 PLACE ±
0 PLACES ±
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION UNITS: mm
SCALE: 1:1
DRWN BY: AKHEMIRI DATE: 2017/11/28
CHK'D BY: DMERONI DATE: 2017/11/29
APPR BY: AMELZI DATE: 2017/11/29
DRAWING SIZE: A4
FIRST ANGLE PROJECTION

molex®

2500.0010.0
STRAIGHT SNAP-IN COUPLER RJ45 - RJ45 JACK
FULLY SHIELDED CAT 5E

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
93606	936060259	GENERAL MARKET

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
936060259	PSD	000	1 OF 1

RELEASE STATUS | P1 | RELEASE DATE | 29.11.2017 12:05:06

FORMAT: tb-prod-A4
REVISION: G
DATE: 2015/12/14