


© COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

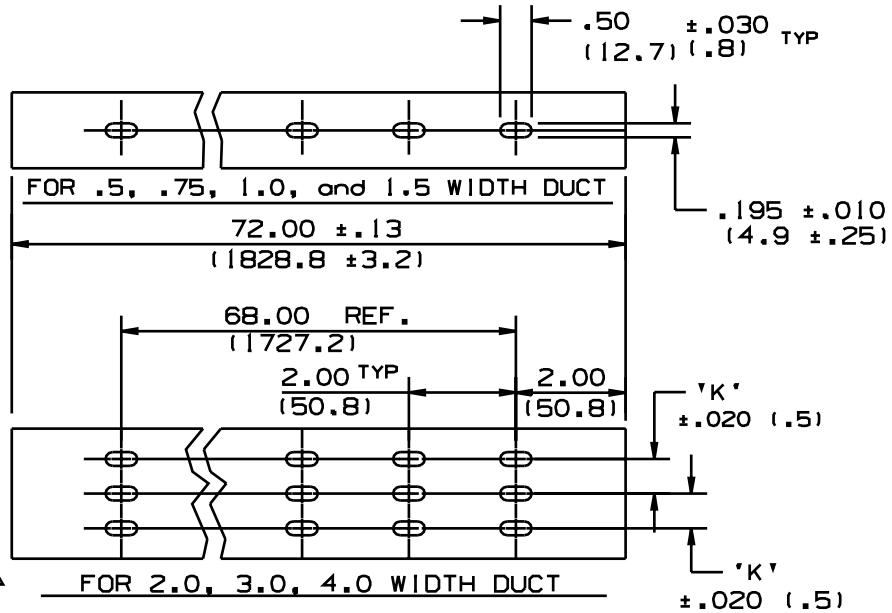

MOUNTING HOLE DIMENSIONS

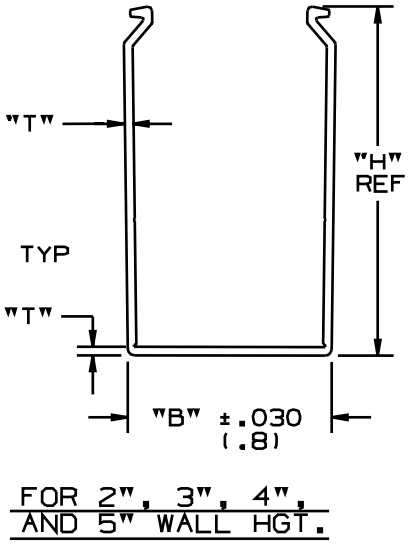

FOR 2", 3", 4", AND 5" WALL HGT.

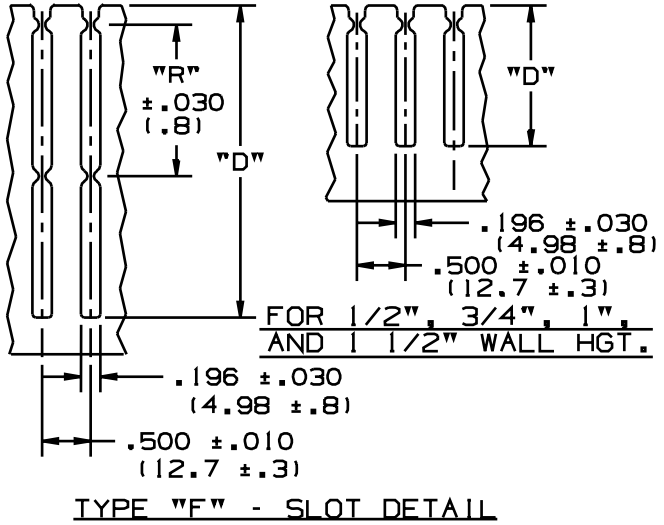

TYPE "F" - SLOT DETAIL

PART NO. SYSTEM
CHANNEL EXAMPLE:

FS 1.5 X 2 •• 6 NM -A

- FS — TYPE
- 1.5 — 1.5" WIDE
- 2 — 2" HIGH
- •• — COLOR
- 6 — LENGTH (FT)
- NM — NO MOUNTING HOLES
- -A — ADHESIVE BACKED

NOTES:
1. "B" MEASURED AT BASE.
2. STANDARD LENGTH: 6 ft. (1.83m).
3. SEE CURRENT CATALOG FOR PART NUMBER DESIGNATIONS FOR TYPE, COLOR, AND LENGTH.
4. TYPE "FS" SOLID WALL DUCT, IS AVAILABLE, WITH SAME DIMENSIONS, BUT WITHOUT SLOTS IN THE WALLS.
5. DUCT TYPES "FS" AND "F" TO BE USED WITH TYPE "C" COVER. (SEE DWG # 34518-17)
6. DIMENSIONS IN PARENTHESES ARE IN METRIC.
7. ADHESIVE BACKED DUCT AND/OR DUCT WITH OR WITHOUT HOLES IS ALSO AVAILABLE.

REV	DATE	BY	CHK	DESCRIPTION	ECN	CHK	CUST	SUP
-	.....		---	J. REV'D "T" DIM'S AND TOL'S.	--------	---		
-	.....	---	---	I. REV'D EXAMPLE: ADDED LENGTH H. ADDED HOLES TO VIEW	--------	---		
-	.....	---	---	G. CHANGED NOTES 4 & 7. F. CHANGED TITLE TO INCLUDE "FS"	--------	---		
4	8-3-01	JCST	JKG	E. ADDED DUCT SIZES: .75X1, .75X2, 2.5X3, AND 4X1.5.	34301-03	JKG	JKG	
3	01-24-97	JBA	CEF	D. REV'D EXAMPLE: ADDED S, NM & -A. C. ADDED NOTE #7.	34301-03	CEF	CEF	
2	10-18-95	DW	CEF	B. REV'D "T" DIM'S AND TOL'S.	34301-03	CEF		
1	10-26-93	DW	CEF	A. ADDED FS6X4 DUCT SIZE.	34301-03	CEF		
R	3/17/93	DW	BKR	RELEASED TO PRODUCTION.	34301-03	CEF		

WAS DPC_PVC_F_US_01 (2)

CAD FILENAME/LAYERS

D34301BA_PVC_F_US_02A.prt

PANDUIT CORP. TINLEY PA

WIRING DUCT, TYPE "F" & "FS" CUSTOMER DRAWING

OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± .1213.1) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION.

DRAWN BY: LDB
DATE: 3/1/93
CHECKED BY: BKR

POLYVINYL CHLORIDE

SCALE: NONE
DRAWING NO.: 34301-03 Sht 1 of 2
DWG SIZE: A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

△J △B

	NOMINAL DUCT			D TOL	H REF			T TOL	R
	.5 X .5	.69 (17.5)	.7)	±.014 (.4)	.50 (12.7)	ON C/L	.050 (1.3)	±.008 (.2)	N/A
	.5 X 1	"	.75 (19.1)	±.020 (.5)	1.00 (25.4)		"	±.010 (.3)	N/A
	.75 X .75	.94 (23.8)	.56 (14.3)	"	.75 (19.1)		.055 (1.4)	±.008 (.2)	N/A
>	.75 X 1	"	N/A	N/A	1.00 (25.4)	N/A	"	"	N/A
	.75 X 1.5	"	1.20 (30.5)	±.020 (.5)	1.50 (38.1)	ON C/L	.070 (1.8)	±.010 (.3)	N/A
>	.75 X 2	"	N/A	N/A	2.00 (50.8)	N/A	.080 (2.0)	±.008 (.2)	N/A
	1 X 1	1.25 (31.8)	.75 (19.1)	±.020 (.5)	1.00 (25.4)		.055 (1.4)	±.010 (.3)	N/A
	1 X 1.5	"	1.20 (30.5)	"	1.50 (38.1)		.070 (1.8)	±.008 (.2)	N/A
	1 X 2	"	1.63 (41.4)	±.030 (.8)	2.00 (50.8)		.080 (2.0)	±.015 (.4)	.712 (18.1)
	1 X 3	"	2.63 (66.8)	"	3.00 (76.2)		.095 (2.4)	±.012 (.3)	1.212 (30.8)
	1 X 4	"	3.63 (92.2)	"	4.00 (101.6)		.105 (2.7)	±.019 (.5)	1.700 (43.2)
	1.5 X 1	1.75 (44.5)	.75 (19.1)	±.020 (.5)	1.00 (25.4)		.060 (1.5)	±.010 (.3)	N/A
	1.5 X 1.5	"	1.20 (30.5)	"	1.50 (38.1)		.070 (1.8)	±.012 (.3)	N/A
	1.5 X 2	"	1.63 (41.4)	±.030 (.8)	2.00 (50.8)		.080 (2.0)	"	.712 (18.1)
	1.5 X 3	"	2.63 (66.8)	"	3.00 (76.2)		.095 (2.4)	±.010 (.3)	1.212 (30.8)
	1.5 X 4	"	3.63 (92.2)	"	4.00 (101.6)		.105 (2.7)	±.012 (.3)	1.700 (43.2)

ON CENTERLINE

N/A = NOT AVAILABLE

△J △B

	NOMINAL DUCT SIZE (W X H)	B	D	D TOL.	H REF	K	T	T TOL	R
	2 X 1	2.25 (57.2)	.75 (19.1)	±.020 (.5)	1.00 (25.4)	.50 (12.7)	.060 (1.5)	±.010 (.3)	N/A
	2 X 1.5	"	1.20 (30.5)	"	1.50 (38.1)	"	.070 (1.8)	±.012 (.3)	N/A
	2 X 2	"	1.63 (41.4)	±.030 (.8)	2.00 (50.8)	"	.080 (2.0)	"	.712 (18.1)
	2 X 3	"	2.63 (66.8)	"	3.00 (76.2)	"	.095 (2.4)	±.010 (.3)	1.212 (30.8)
	2 X 4	"	3.63 (92.0)	"	4.00 (101.6)	"	.105 (2.7)	±.017 (.4)	1.700 (43.2)
	2 X 5	"	4.63 (117.6)	±.040 (1.0)	5.00 (127.0)		.111 (2.8)	"	2.233 (56.7)
>	2.5 X 3	2.75 (69.8)	N/A	N/A	3.00 (76.2)	N/A	.095 (2.4)	±.015 (.4)	N/A
	3 X 1	3.25 (82.6)	.75 (19.1)	±.020 (.5)	1.00 (25.4)	1.00 (25.4)	.065 (1.7)	±.010 (.3)	N/A
	3 X 2	"	1.63 (41.4)	±.030 (.8)	2.00 (50.8)	"	.080 (2.0)	"	.712 (18.1)
	3 X 3	"	2.63 (66.8)	"	3.00 (76.2)	"	.100 (2.5)	±.015 (.4)	1.212 (30.8)
	3 X 4	"	3.63 (92.2)	"	4.00 (101.6)	"	.105 (2.7)	"	1.700 (43.2)
	3 X 5	"	4.63 (117.6)	±.040 (1.0)	5.00 (127.0)	"	.115 (2.9)	±.012 (.3)	2.233 (56.7)
>	4 X 1.5	4.25 (108.0)	N/A		1.50 (38.1)	N/A	.070 (1.8)	±.008 (.2)	
	4 X 2	"	1.63 (41.4)	±.030 (.8)	2.00 (50.8)	1.50 (38.1)	.080 (2.0)	"	.712 (18.1)
	4 X 3	"	2.63 (66.8)	"	3.00 (76.2)	"	.095 (2.4)	±.010 (.3)	1.212 (30.8)
	4 X 4	"	3.63 (92.2)	"	4.00 (101.6)	"	.105 (2.7)	±.012 (.3)	1.700 (43.2)
	4 X 5	"	4.63 (117.6)	±.040 (1.0)	5.00 (127.0)	"	.110 (2.8)	±.018 (.5)	2.233 (56.7)
△A >	6 X 4	6.25 (158.8)	N/A	N/A	4.00 (101.6)	N/A	.110 (2.8)	±.010 (.3)	N/A

N/A = NOT AVAILABLE
> = AVAILABLE AS "FS" ONLY.

△E

WAS DPC_PVC_F_US_01

DIMENSIONS IN PARENTHESIS ARE IN METRIC.

CAD FILENAME/LAYERS: D34301BA_PVC_F_US_02

REV	DATE	BY	CHK	DESCRIPTION	ECN	CHK	CUST	SUP	
4	8-3-01	JCST	JKG	SEE SHEET 1 FOR REVISION NUMBERS	34301-03	JKG	JKG		
3	01-24-97	JBA	CEF	SEE SHEET 1 FOR REVISION NUMBERS	34301-03	CEF	CEF		
2	10-18-95	DW	CEF	SEE SHEET 1 FOR REVISION NUMBERS	34301-03	CEF			
1	10-27-93	DW	CEF	SEE SHEET 1 FOR REVISION NUMBERS	34301-03	CEF			
R	3/17/93	DW	BKR	SEE SHEET 1 FOR REVISION NUMBERS	34301-03	CEF			

PANDUIT CORP. TINLEY PARK, ILLINOIS

WIRING DUCT, TYPE "F" & "FS" CUSTOMER DRAWING △F

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± .12[3.1] ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION.

DRAWN BY: DW
DATE: 3/1/93
CHECKED BY: BKR
MAT'L: POLYVINYL CHLORIDE
SCALE: NONE
DRAWING NO.: 34301-03 Sht 2 of 2
DWG SIZE: A