

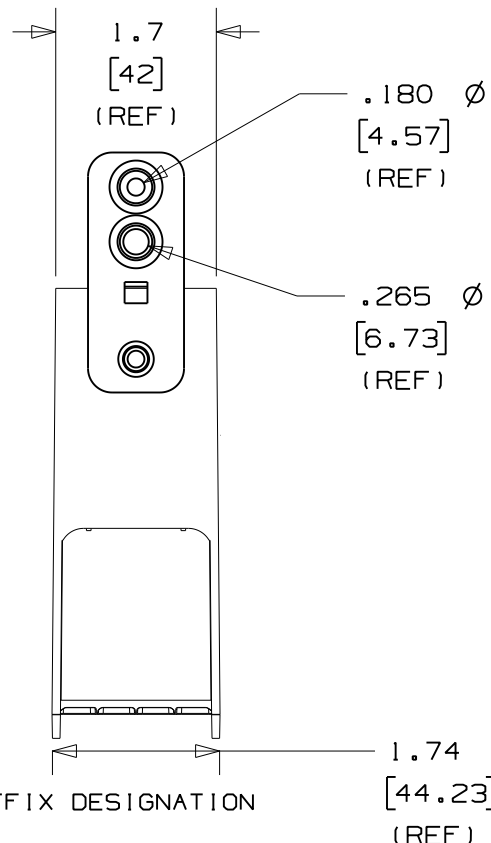


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

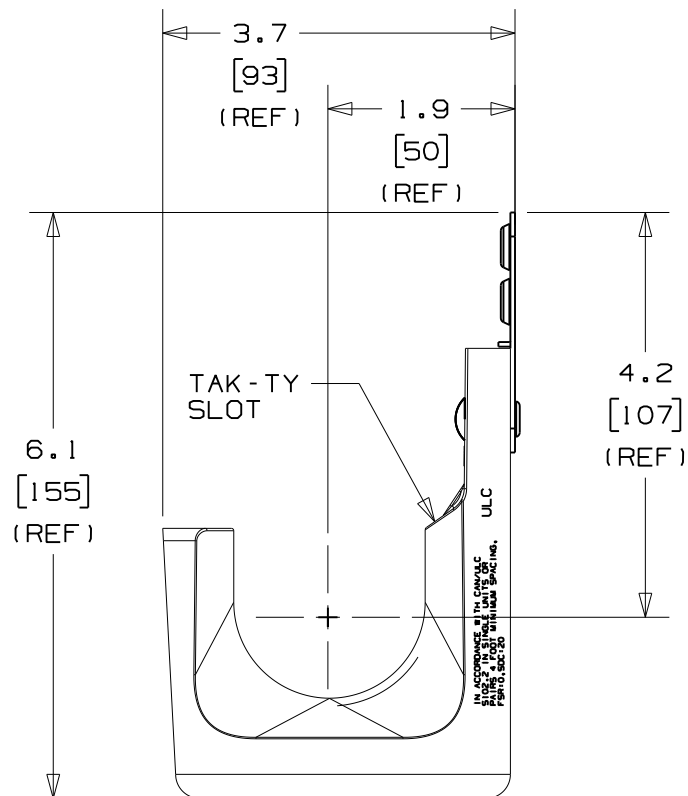


PANDUIT PART NO.	WEIGHT lbs 10 (g) pcs
JP2WP2B- ---	2.57 (1166)

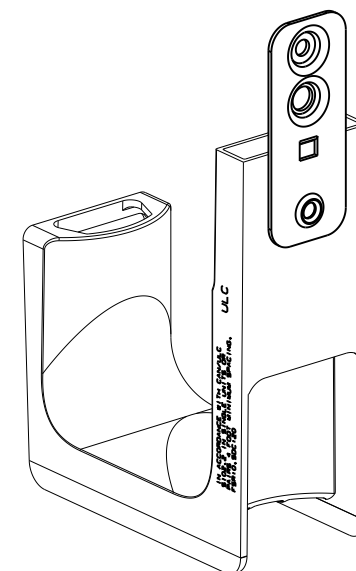

NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
2. HOOK MATERIAL: NYLON 6/6
PLATE MATERIAL: PRE-GALVANIZED STEEL
RIVET MATERIAL: ALUMINUM
3. PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 2" (50.8) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 30 lbs.
4. PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
5. PRODUCT MARKINGS:
 - cULus logo and statement:
"SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE."
"FOR USE INDOORS"
 - ULC logo and statement:
"IN ACCORDANCE WITH CAN/ULC S-102.2-10 MOUNTED IN SINGLE UNITS OR PAIRS, MINIMUM SPACING 4 ft (1220mm) BETWEEN MOUNT POINTS FSR=0. SDC=35."

TITLE					J-PRO J-HOOK WITH PLATE FOR POWDER ACTUATED FASTENERS (JP2WP2B-__-) CUSTOMER DRAWING				
ITEM REVISION NAME					121031AG/00				
DATASET FILE NAME					121031AG_DC_C11006/00A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]									
.x : .1 (2.54) .xxx : .005 (.127) .xx : .01 (.25) ANGLES : 5 °					MATERIAL : SEE NOTE 2				
 THIRD ANGLE PROJECTION					DRAWING NUMBER: C11006				
DRAWN BY		DATE		CHK		SCALE		SIZE	
DBLA		10/28/2012		KLN		NONE		SHT 1 OF 1	
								A	