

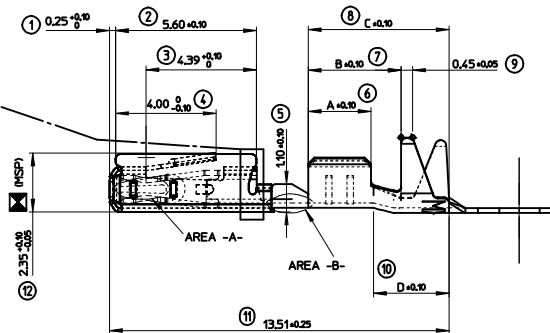



FORME ADMISE
ALLOWED VERSION

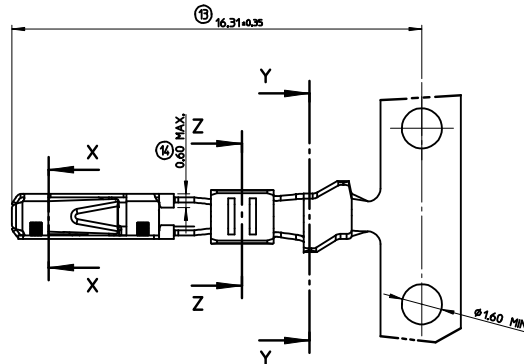


X-X




Z-Z



Y-Y



	MOLEX REFERENCE	AREA -A- (GAP AREA)	AREA -B-	CRIMPING AREA	Wire size range	Longeurs Length	Serlesage Conducteur Wire Crimp	Serlesage Isolatant Insulation Crimp	Poids Weight
TIN PLATED VERSION	0986581211	HOT TIN DIP Sn = 1.0 to 3.0 Hs			0.22 to 0.60 mm2	A=2.50 B=3.70 C=5.60 D=3.00	E=1.90 F=2.10 Rc=0.50	G=2.90 H=2.80 Ri=0.80	0.1600 g
GOLD PLATED VERSION	0986581221	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.		Sn = 1.0 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.					
GOLD PLATED VERSION	0986581231	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Sn = 1.0 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.					
TIN PLATED VERSION	0986581212	HOT TIN DIP Sn = 1.0 to 3.0 Hs			0.75 mm2	A=2.80 B=3.70 C=5.60 D=2.70	E=2.25 F=2.25 Rc=0.50	G=2.90 H=2.80 Ri=0.80	0.1600 g
GOLD PLATED VERSION	0986581222	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.		Sn = 1.0 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.					
GOLD PLATED VERSION	0986581232	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Sn = 1.0 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.					
TIN PLATED VERSION	0986581213	HOT TIN DIP Sn = 1.0 to 3.0 Hs			0.22 to 0.50 mm2	A=2.50 B=3.70 C=5.60 D=3.00	E=1.80 F=1.80 Rc=0.40	G=2.30 H=2.30 Ri=0.70	0.1600 g
GOLD PLATED VERSION	0986581223	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.		Sn = 1.0 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.					
GOLD PLATED VERSION	0986581233	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Sn = 1.0 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.					



NOTE:

- MATERIAL: CONTACT BODY: HIGH CONDUCTIVE COPPER ALLOY.
SLEEVE: STAINLESS STEEL.
- PACKAGING SPECIFICATION: PK-98658-006.
- CRIMPING PARAMETERS AND CRIMPING TOOL DEFINITION: SEE CS-98658-001.

INDICATION DIMENSIONS S.P.C. DENOTES S.P.C. DIMENSIONS	INDICATION DIMENSIONS DETERMINANT LES CAPACITES MACHINE DENOTES DIMENSIONS DETERMINING THE MACHINE'S ABILITIES	INDICATION DIMENSIONS FONCTIONNELLES DENOTES FUNCTIONNELLES DIMENSIONS
QUANTITE PAR FEUILLE INDIVIDUELLE QUANTITY PER INDIVIDUAL SHEET	QUANTITE PAR FEUILLE INDIVIDUELLE QUANTITY PER INDIVIDUAL SHEET	QUANTITE PAR FEUILLE INDIVIDUELLE QUANTITY PER INDIVIDUAL SHEET
2	4	0

MOB LOCATION SLEEVE MOVED DEC NO: G2014-0197 DRAWING LESS IS CHYK-MANDRE 2014/03/07 APPR: JDUCCLOS 2014/04/16	QUALITY SYMBOLS 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0. ± --- 1 PLACE ± 0. ± --- 0 PLACE ± 0. ± ---	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0. ± --- 1 PLACE ± 0. ± --- 0 PLACE ± 0. ± --- ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM ONLY DRAWN BY JTAMSSON DATE 1998/06/01 CHECKED BY DATE 1999/10/14 APPROVED BY DATE 1999/10/14 CBOUCHAN	SCALE 10:1 DESIGN UNITS METRIC FIRST ANGLE PROJECTION	TITLE MOX 0.63 TERMINAL RECEPTACLE TERMINAL GENERIC CONTROL DRAWING molex	DOCUMENT NO. SD-98658-004	SHEET NO. 1 OF 1