
NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9476COLOR
   HOUSING: POLYAMIDE/POLYOXYMETHYLENE
   AVAILABLE IN BLK, RED, YEL, GRN, BLU, WTE
   FRAME: NICKEL PLATED BRASS
   CONTACT: NICKEL PLATED CuBe

2. P/N: W-200/COLOR
   22AWG 65X40 TINNED COPPER
   0.070 [1.78] O.D. PVC INSULATION
   AVAILABLE IN TEN COLORS.

3. PERFORMANCE
   MAXIMUM CURRENT: 2.5 AMPS
   MAXIMUM VOLTAGE: < 33VAC < 70VDC.
   MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

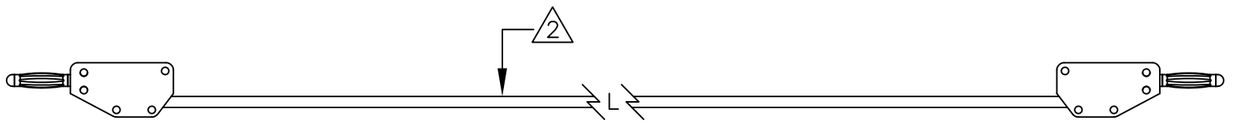

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
			DRAWN R.L.	10/18	DESCRIPTION 2MM STK BAN PLUG (9476) JUMPER
		MATERIAL SEE NOTE.	APPROVED BY		
		FINISH SEE NOTE.			SIZE B | CODE IDENT NO. 08505 | DRAWING NO. 9922 | REV.
NEXT ASSY	USED ON				SCALE 1:1 | SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.