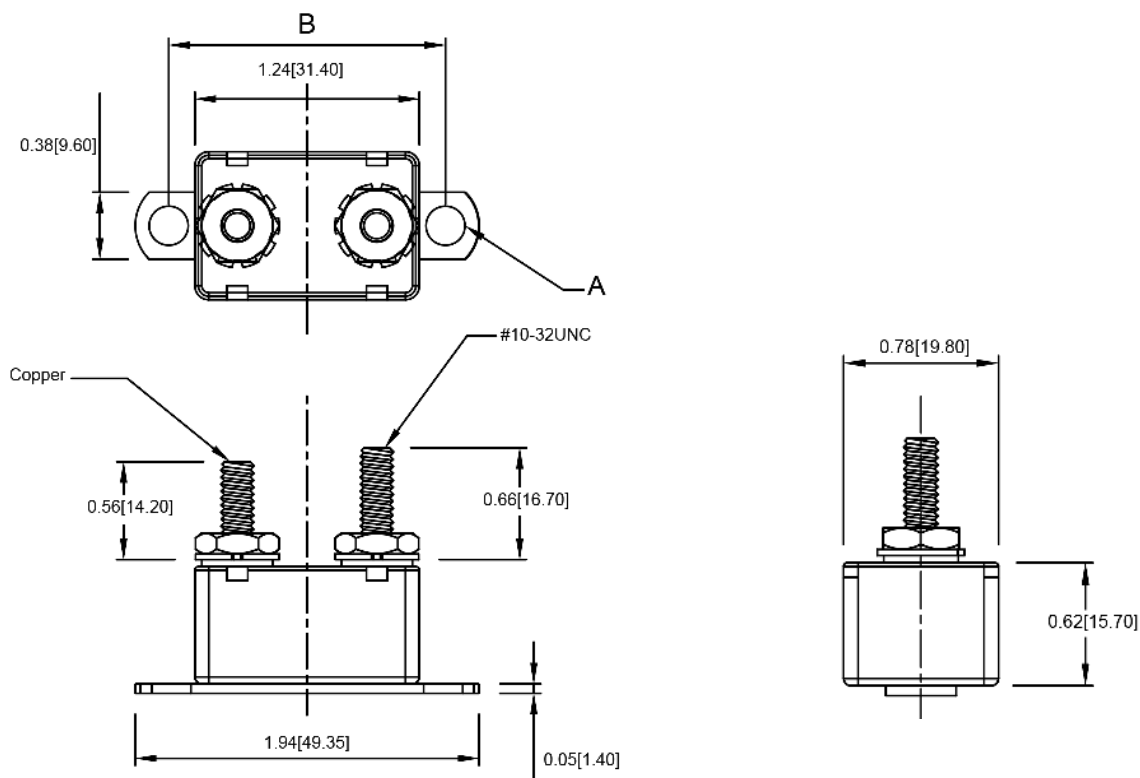


Mechanical Dimensions: Inches [mm]**Part Numbers Information**

Optifuse P/N	Current
ACB-24-V-10A	10A
ACB-24-V-15A	15A
ACB-24-V-20A	20A
ACB-24-V-25A	25A
ACB-24-V-30A	30A
ACB-24-V-40A	40A
ACB-24-V-50A	50A

Time vs. Percent of Rated Current

% of Rated Current	Min Trip Time	Max Trip Time
100%	30m	-
135%	-	30m
200%	-	1m

Electrical Specifications

Voltage	24VDC
Reset Type	Type I - Auto Reset
Operation Temperature	-40° F ~ 175° F
Compliances	SAE J553

Material Specification

Body Material	Plated Steel
Terminals Material	Battery – Copper, Auxiliary – Zinc
Terminals Configuration	#10-32 Stud
Mounting Type	Bracket attached crosswise the case



Rev	Date of issue	Revision Notes	Designed	Approved
A	06-25-2020	Initial Drawing	RC	OF