
CMOS 8-/16-Channel Analog Multiplexers

ADG506A/ADG507A

FEATURES
- 44 V Supply Maximum Rating
- V_{SS} to V_{DD} Analog Signal Range
- Single/Dual Supply Specifications
- Wide Supply Ranges (10.8 V to 16.5 V)
- Extended Plastic Temperature Range (–40°C to +85°C)
- Low Power Dissipation (28 mW max)
- Low Leakage (20 pA typ)
- Available in 28-Lead DIP, SOIC, PLCC, TSSOP and LCCC Packages
- Superior Alternative to:
  - DG506A, HI-506
  - DG507A, HI-507

FUNCTIONAL BLOCK DIAGRAM

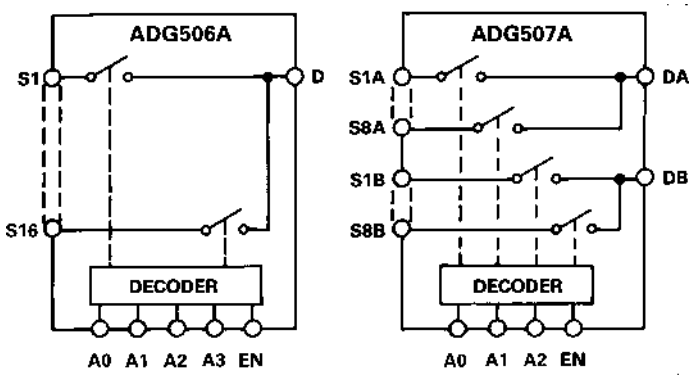

GENERAL DESCRIPTION

The ADG506A and ADG507A are CMOS monolithic analog multiplexers with 16 channels and dual 8 channels, respectively. The ADG506A switches one of 16 inputs to a common output, depending on the state of four binary addresses and an enable input. The ADG507A switches one of eight differential inputs to a common differential output, depending on the state of three binary addresses and an enable input. Both devices have TTL and 5 V CMOS logic compatible digital inputs.

The ADG506A and ADG507A are designed on an enhanced LC^2MOS process, which gives an increased signal capability of V_{SS} to V_{DD} and enables operation over a wide range of supply voltages. The devices can operate comfortably anywhere in the 10.8 V to 16.5 V single or dual supply range. These multiplexers also feature high switching speeds and low R_{ON}.

PRODUCT HIGHLIGHTS

1. Single/Dual Supply Specifications with a Wide Tolerance
   The devices are specified in the 10.8 V to 16.5 V range for both single and dual supplies.
2. Extended Signal Range
   The enhanced LC^2MOS processing results in a high breakdown and an increased analog signal range of V_{SS} to V_{DD}.
3. Break-Before-Make Switching
   Switches are guaranteed break-before-make so input signals are protected against momentary shorting.
4. Low Leakage
   Leakage currents in the range of 20 pA make these multiplexers suitable for high precision circuits.

ORDERING GUIDE

Model[1]	Temperature Range	Package Option[2]
ADG506AKN	–40°C to +85°C	N-28
ADG506AKR	–40°C to +85°C	R-28
ADG506AKP	–40°C to +85°C	P-28A
ADG506ABQ	–40°C to +85°C	Q-28
ADG506ATQ	–55°C to +125°C	Q-28
ADG506ATE	–55°C to +125°C	E-28A
ADG507AKN	–40°C to +85°C	N-28
ADG507AKR	–40°C to +85°C	R-28
ADG507AKP	–40°C to +85°C	P-28A
ADG507AKRU	–40°C to +85°C	RU-28
ADG507ABQ	–40°C to +85°C	Q-28
ADG507ATQ	–55°C to +125°C	Q-28
ADG507ATE	–55°C to +125°C	E-28A

NOTES
[1]To order MIL-STD-883, Class B processed parts, add /883B to part number. See Analog Devices' *Military/Aerospace Reference Manual* (1994) for military data sheet.
[2]E = Leadless Ceramic Chip Carrier (LCCC); N = Plastic DIP; P = Plastic Leaded Chip Carrier (PLCC); Q = Cerdip; R = 0.3" Small Outline IC (SOIC); RU = Thin Shrink Small Outline Package (TSSOP).

REV. C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781/329-4700 World Wide Web Site: http://www.analog.com
Fax: 781/326-8703
© Analog Devices, Inc., 1998

ADG506A/ADG507A–SPECIFICATIONS

Dual Supply (V_{DD} = +10.8 V to +16.5 V, V_{SS} = –10.8 V to –16.5 V unless otherwise noted)

Parameter	ADG506A ADG507A K Version +25°C	–40°C to +85°C	ADG506A ADG507A B Version +25°C	–40°C to +85°C	ADG506A ADG507A T Version +25°C	–55°C to +125°C	Units	Comments
ANALOG SWITCH								
Analog Signal Range	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V min	
	V_{DD}	V_{DD}	V_{DD}	V_{DD}	V_{DD}	V_{DD}	V max	
R_{ON}	280		280		280		Ω typ	–10 V ≤ V_S ≤ +10 V, I_{DS} = 1 mA; Test Circuit 1
	450	600	450	600	450	600	Ω max	
	300	400	300	400			Ω max	V_{DD} = 15 V (±10%), V_{SS} = –15 V (±10%)
					300	400	Ω max	V_{DD} = 15 V (±5%), V_{SS} = –15 V (±5%)
R_{ON} Drift	0.6		0.6		0.6		%/°C typ	–10 V ≤ V_S ≤ +10 V, I_{DS} = 1 mA
R_{ON} Match	5		5		5		% typ	–10 V ≤ V_S ≤ +10 V, I_{DS} = 1 mA
I_S (OFF), Off Input Leakage	0.02		0.02		0.02		nA typ	V1 = ±10 V, V2 = ∓10 V; Test Circuit 2
	1	50	1	50	1	50	nA max	
I_D (OFF), Off Output Leakage	0.04		0.04		0.04		nA typ	V1 = ±10 V, V2 = ∓10 V; Test Circuit 3
ADG506A	1	200	1	200	1	200	nA max	
ADG507A	1	100	1	100	1	100	nA max	
I_D (ON), On Channel Leakage	0.04		0.04		0.04		nA typ	V1 = ±10 V, V2 = ∓10 V; Test Circuit 4
ADG506A	1	200	1	200	1	200	nA max	
ADG507A	1	100	1	100	1	100	nA max	
I_{DIFF}, Differential Off Output Leakage (ADG507A Only)		25		25		25	nA max	V1 = ±10 V, V2 = ∓10 V; Test Circuit 5
DIGITAL CONTROL								
V_{INH}, Input High Voltage		2.4		2.4		2.4	V min	
V_{INL}, Input Low Voltage		0.8		0.8		0.8	V max	
I_{INL} or I_{INH}		1		1		1	µA max	V_{IN} = 0 to V_{DD}
C_{IN} Digital Input Capacitance	8		8		8		pF max	
DYNAMIC CHARACTERISTICS								
$t_{TRANSITION}$[1]	200		200		200		ns typ	V1 = ±10 V, V2 = +10 V; Test Circuit 6
	300	400	300	400	300	400	ns max	
t_{OPEN}[1]	50		50		50		ns typ	Test Circuit 7
	25	10	25	10	25	10	ns min	
t_{ON} (EN)[1]	200		200		200		ns typ	Test Circuit 8
	300	400	300	400	300	400	ns max	
t_{OFF} (EN)[1]	200		200		200		ns typ	Test Circuit 8
	300	400	300	400	300	400	ns max	
OFF Isolation	68		68		68		dB typ	V_{EN} = 0.8 V, R_L = 1 kΩ, C_L = 15 pF,
	50		50		50		dB min	V_S = 7 V rms, f = 100 kHz
C_S (OFF)	5		5		5		pF typ	V_{EN} = 0.8 V
C_D (OFF)								
ADG506A	44		44		44		pF typ	V_{EN} = 0.8 V
ADG507A	22		22		22		pF typ	
Q_{INJ}, Charge Injection	4		4		4		pC typ	R_S = 0 Ω, V_S = 0 V; Test Circuit 9
POWER SUPPLY								
I_{DD}	0.6		0.6		0.6		mA typ	V_{IN} = V_{INL} or V_{INH}
		1.5		1.5		1.5	mA max	
I_{SS}	20		20		20		µA typ	V_{IN} = V_{IN} or V_{INH}
		0.2		0.2		0.2	mA max	
Power Dissipation	10		10		10		mW typ	
		28		28		28	mW max	

NOTES

[1]Sample tested at +25°C to ensure compliance.

Specifications subject to change without notice.

Single Supply (V_{DD} = +10.8 V to +16.5 V, V_{SS} = GND = 0 V unless otherwise noted)

Parameter	ADG506A ADG507A K Version +25°C	ADG506A ADG507A K Version −40°C to +85°C	ADG506A ADG507A B Version +25°C	ADG506A ADG507A B Version −40°C to +85°C	ADG506A ADG507A T Version +25°C	ADG506A ADG507A T Version −55°C to +125°C	Units	Comments
ANALOG SWITCH								
Analog Signal Range	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V min	
	V_{DD}	V_{DD}	V_{DD}	V_{DD}	V_{DD}	V_{DD}	V max	
R_{ON}	500		500		500		Ω typ	0 V ≤ V_S ≤ +10 V, I_{DS} = 0.5 mA; Test Circuit 1
	700	1000	700	1000	700	1000	Ω max	
R_{ON} Drift	0.6		0.6		0.6		%/°C typ	0 V ≤ V_S ≤ +10 V, I_{DS} = 0.5 mA
R_{ON} Match	5		5		5		% typ	0 V ≤ V_S ≤ +10 V, I_{DS} = 0.5 mA
I_S (OFF), Off Input Leakage	0.02		0.02		0.02		nA typ	V1 = +10 V/0 V, V2 = 0 V/ +10 V;
	1	50	1	50	1	50	nA max	Test Circuit 2
I_D (OFF), Off Output Leakage	0.04		0.04		0.04		nA typ	V1 = +10 V/0 V, V2 = 0 V/ +10 V;
ADG506A	1	200	1	200	1	200	nA max	Test Circuit 3
ADG507A	1	100	1	100	1	100	nA max	
I_D (ON), On Channel Leakage	0.04		0.04		0.04		nA typ	V1 = +10 V/0 V, V2 = 0 V/ +10 V;
ADG506A	1	200	1	200	1	200	nA max	Test Circuit 4
ADG507A	1	100	1	100	1	100	nA max	
I_{DIFF}, Differential Off Output								V1 = +10 V/0 V, V2 = 0 V/ +10 V;
Leakage (ADG507A Only)		25		25		25	nA max	Test Circuit 5
DIGITAL CONTROL								
V_{INH}, Input High Voltage		2.4		2.4		2.4	V min	
V_{INL}, Input Low Voltage		0.8		0.8		0.8	V max	
I_{INL} or I_{INH}		1		1		1	µA max	V_{IN} = 0 to V_{DD}
C_{IN} Digital Input Capacitance	8		8		8		pF max	
DYNAMIC CHARACTERISTICS								
$t_{TRANSITION}$[1]	300		300		300		ns typ	V1 = +10 V/0 V, V2 = +10 V; Test Circuit 6
	450	600	450	600	450	600	ns max	
t_{OPEN}[1]	50		50		50		ns typ	Test Circuit 7
	25	10	25	10	25	10	ns min	
t_{ON} (EN)[1]	250		250		250		ns typ	Test Circuit 8
	450	600	450	600	450	600	ns max	
t_{OFF} (EN)[1]	250		250		250		ns typ	Test Circuit 8
	450	600	450	600	450	600	ns max	
OFF Isolation	68		68		68		dB typ	V_{EN} = 0.8 V, R_L = 1 kΩ, C_L = 15 pF,
	50		50		50		dB min	V_S = 3.5 V rms, f = 100 kHz
C_S (OFF)	5		5		5		pF typ	V_{EN} = 0.8 V
C_D (OFF)								
ADG506A	44		44		44		pF typ	V_{EN} = 0.8 V
ADG507A	22		22		22		pF typ	
Q_{INJ}, Charge Injection	4		4		4		pC typ	R_S = 0 Ω, V_S = 0 V; Test Circuit 9
POWER SUPPLY								
I_{DD}	0.6		0.6		0.6		mA typ	V_{IN} = V_{INL} or V_{INH}
		1.5		1.5		1.5	mA max	
Power Dissipation	10		10		10		mW typ	
		25		25		25	mW max	

NOTES

[1]Sample tested at +25°C to ensure compliance.

Specifications subject to change without notice.

Truth Table (ADG506A)

A3	A2	A1	A0	EN	On Switch
X	X	X	X	0	NONE
0	0	0	0	1	1
0	0	0	1	1	2
0	0	1	0	1	3
0	0	1	1	1	4
0	1	0	0	1	5
0	1	0	1	1	6
0	1	1	0	1	7
0	1	1	1	1	8
1	0	0	0	1	9
1	0	0	1	1	10
1	0	1	0	1	11
1	0	1	1	1	12
1	1	0	0	1	13
1	1	0	1	1	14
1	1	1	0	1	15
1	1	1	1	1	16

Truth Table (ADG507A)

A2	A1	A0	EN	On Switch Pair
X	X	X	0	NONE
0	0	0	1	1
0	0	1	1	2
0	1	0	1	3
0	1	1	1	4
1	0	0	1	5
1	0	1	1	6
1	1	0	1	7
1	1	1	1	8

X = Don't Care

ABSOLUTE MAXIMUM RATINGS[1]

(T_A = 25°C unless otherwise noted)

V_{DD} to V_{SS} . . . . . 44 V
V_{DD} to GND . . . . . 25 V
V_{SS} to GND . . . . . –25 V
Analog Inputs[2]
Voltage at S, D . . . . . V_{SS} – 2 V to V_{DD} + 2 V or 20 mA, Whichever Occurs First
Continuous Current, S or D . . . . . 20 mA
Pulsed Current S or D
1 ms Duration, 10% Duty Cycle . . . . . 40 mA
Digital Inputs[2]
Voltage at A, EN . . . . . V_{SS} – 4 V to V_{DD} + 4 V or 20 mA, Whichever Occurs First
Power Dissipation (Any Package)
Up to +75°C . . . . . 470 mW
Derates above +75°C by . . . . . 6 mW/°C
Operating Temperature
Commercial (K Version) . . . . . –40°C to +85°C
Industrial (B Version) . . . . . –40°C to +85°C
Extended (T Version) . . . . . –55°C to +125°C
Storage Temperature Range . . . . . –65°C to +150°C
Lead Temperature (Soldering, 10 secs) . . . . . +300°C

NOTES

[1]Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

[2]Overvoltage at A, EN, S or D will be clamped by diodes. Current should be limited to the Maximum Rating above.


CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the ADG506A/ADG507A feature proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.




PIN CONFIGURATIONS

DIP, SOIC

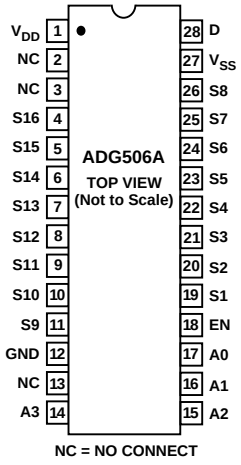


NC = NO CONNECT

LCCC




NC = NO CONNECT

PLCC

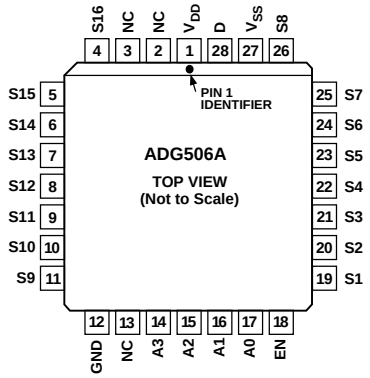


NC = NO CONNECT

DIP, SOIC, TSSOP

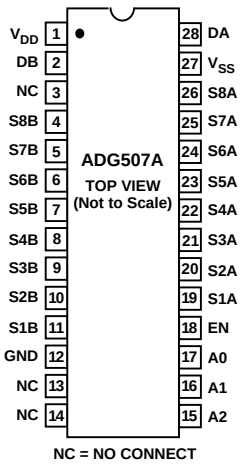


NC = NO CONNECT

LCCC

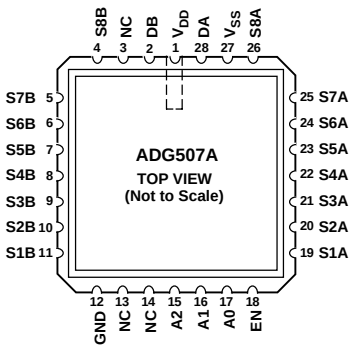

NC = NO CONNECT

PLCC

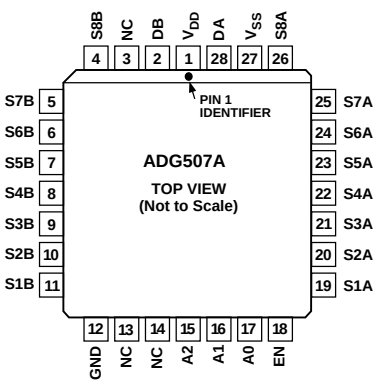

NC = NO CONNECT

The multiplexers are guaranteed functional with reduced single or dual supplies down to 4.5 V.

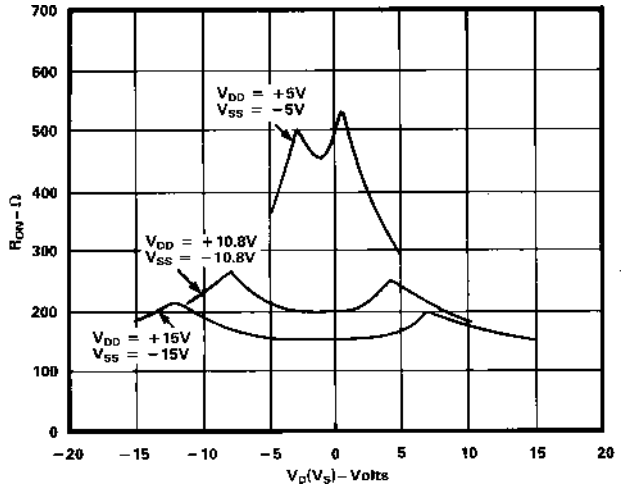


Figure 1. R_{ON} as a Function of V_D (V_S): Dual Supply Voltage, T_A = +25°C

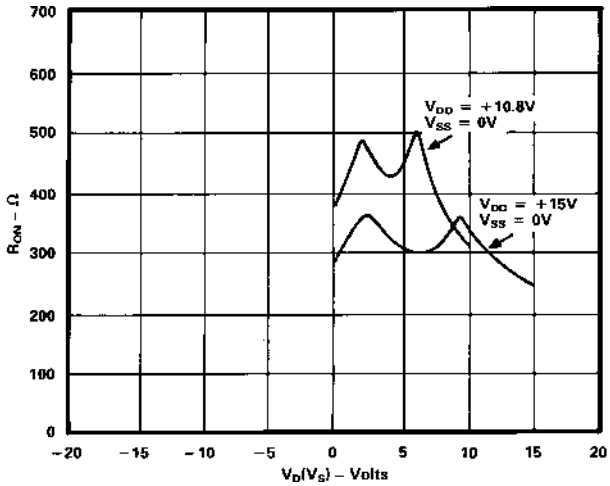


Figure 4. R_{ON} as a Function of V_D (V_S) Single Supply Voltage, T_A = +25°C

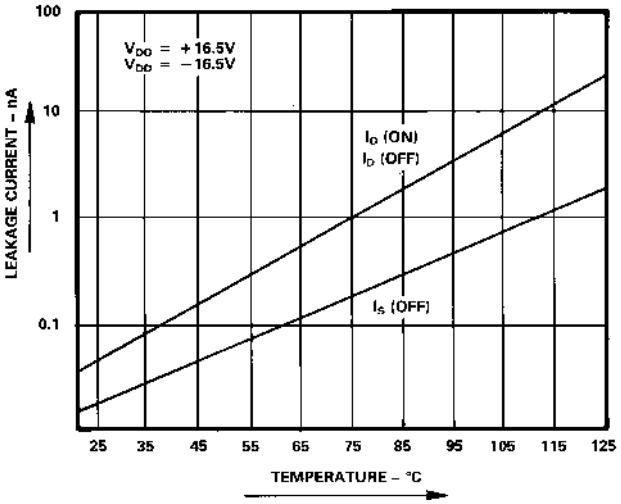


Figure 2. Leakage Current as a Function of Temperature (Note: Leakage Currents Reduce as the Supply Voltages Reduce)

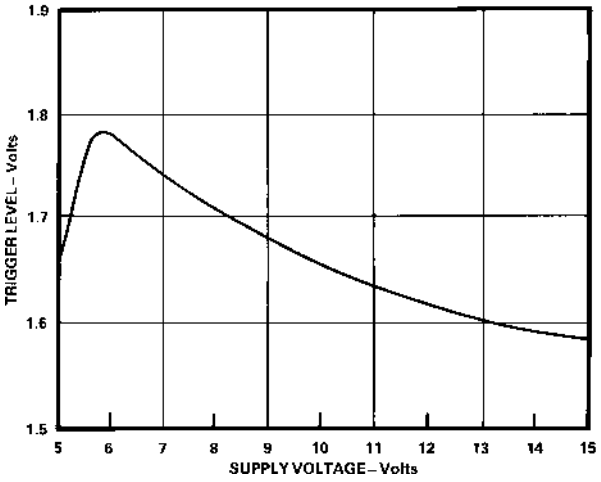


Figure 5. Trigger Levels vs. Power Supply Voltage, Dual or Single Supply, T_A = +25°C

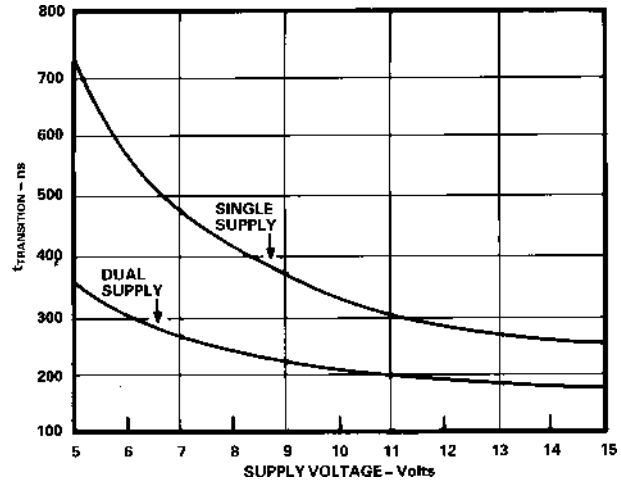


Figure 3. $t_{TRANSITION}$ vs. Supply Voltage: Dual and Single Supplies, T_A = + 25°C (Note: For V_{DD} and /V_{SS}/ < 10 V; V1 = V_{DD}/V_{SS}, V2 = V_{SS}/V_{DD}. See Test Circuit 6)


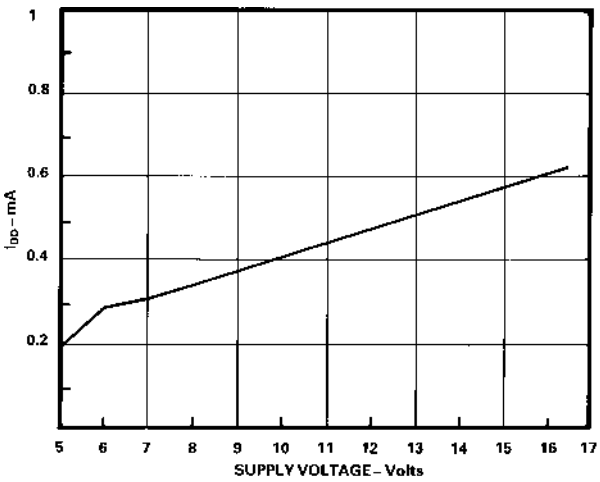



Figure 6. I_{DD} vs. Supply Voltage: Dual or Single Supply, T_A = +25°C

ADG506A/ADG507A–Test Circuits


Note: All Digital Input Signal Rise and Fall Times Measured from 10% to 90% of 3 V. $t_R = t_F = 20$ ns.

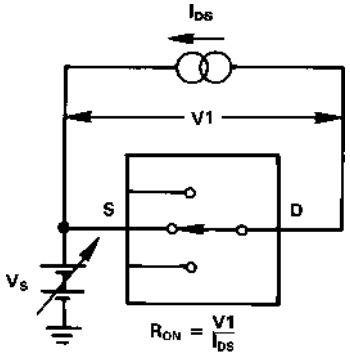


Test Circuit 1. R_{ON}

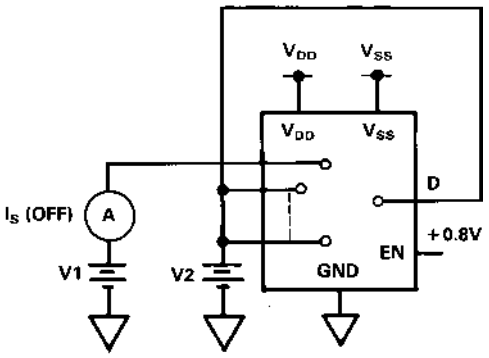


Test Circuit 2. I_S (OFF)

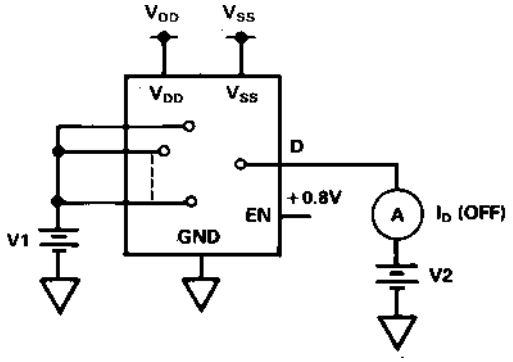


Test Circuit 3. I_D (OFF)

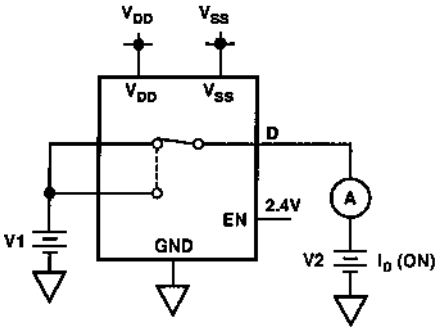


Test Circuit 4. I_D (ON)

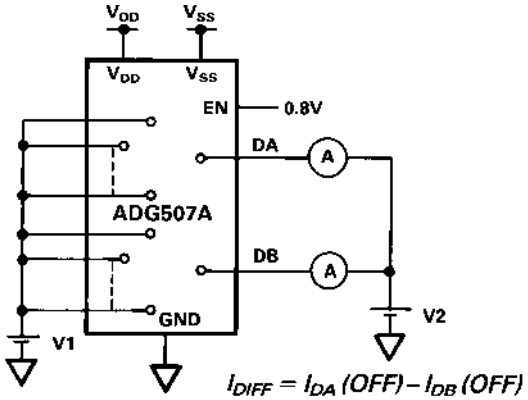


Test Circuit 5. I_{DIFF}

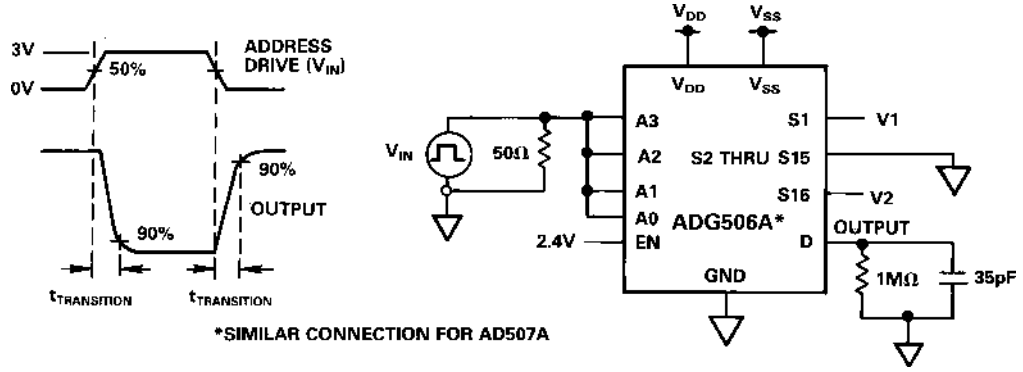


Test Circuit 6. Switching Time of Multiplexer, $t_{TRANSITION}$

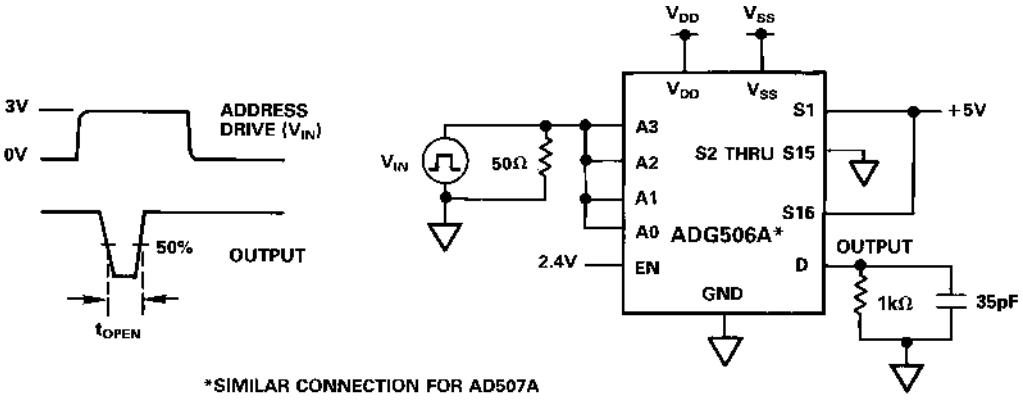

Test Circuit 7. Break-Before-Make Delay, t_{OPEN}

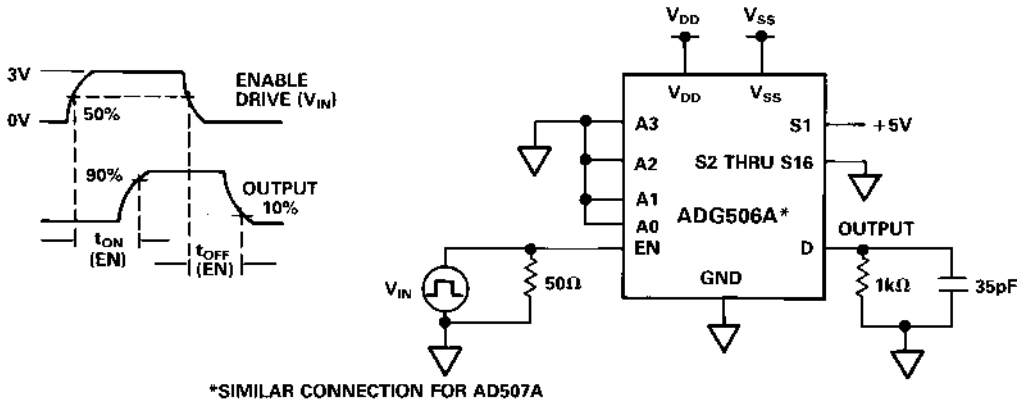

Test Circuit 8. Enable Delay, t_{ON} (EN), t_{OFF} (EN)

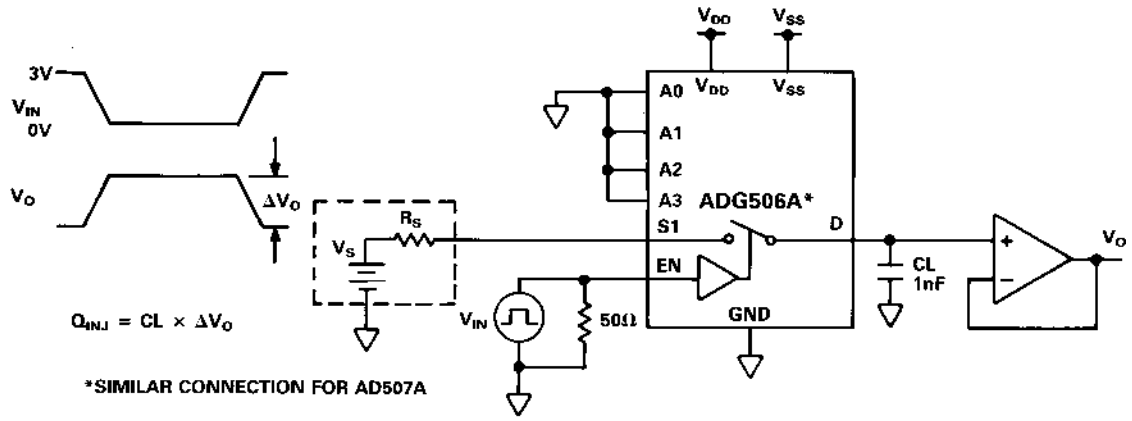

Test Circuit 9. Charge Injection

SINGLE SUPPLY AUTOMOTIVE APPLICATION

The excellent performance of the multiplexers under single supply conditions makes the ADG506A/ADG507A suitable in applications such as automotive and disc drives where only positive power supply voltages are normally available. The following application circuit shows the ADG507A connected as an 8-channel differential multiplexer in an automotive, data acquisition application circuit.

The AD7580 is a 10-bit successive approximation ADC, which has an on-chip sample-hold amplifier and provides a conversion result in 20 μs. The ADC has differential analog inputs and is configured in the application circuit for a span of 2.5 V over a common-mode range 0 V to + 5 V. Wider common-mode ranges can be accommodated. See the AD7579/AD7580 data sheet for more details. The complete system operates from +12 V (+10%) and +5 V supplies. The analog input signals to the ADG507A contain information such as temperature, pressure, speed etc.

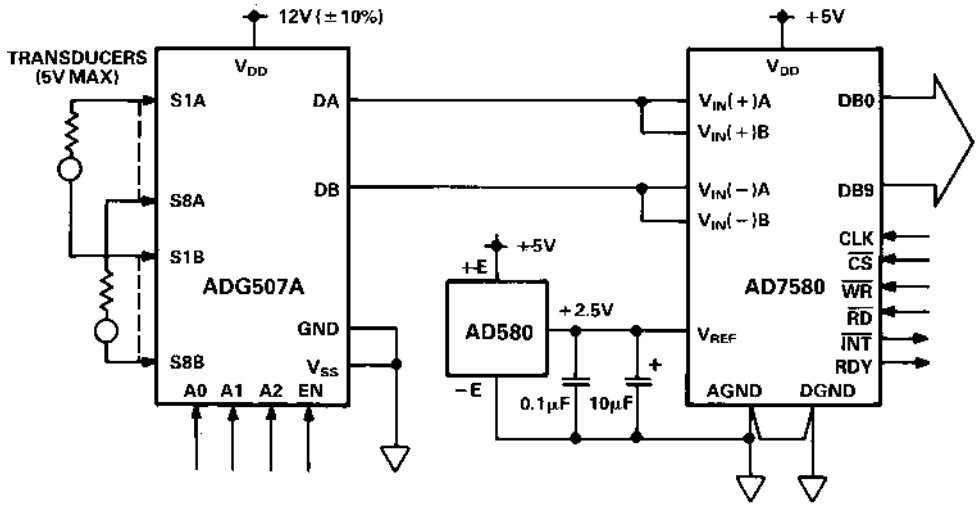


Figure 7. ADG507A in a Single Supply Automotive Data Acquisition Application


TERMINOLOGY

R_{ON}	Ohmic resistance between terminals D and S
R_{ON} Match	Difference between the R_{ON} of any two channels
R_{ON} Drift	Change in R_{ON} versus temperature
I_S (OFF)	Source terminal leakage current when the switch is off
I_D (OFF)	Drain terminal leakage current when the switch is off
I_D (ON)	Leakage current that flows from the closed switch into the body
V_S (V_D)	Analog voltage on terminal S or D
C_S (OFF)	Channel input capacitance for "OFF" condition
C_D (OFF)	Channel output capacitance for "OFF" condition
C_{IN}	Digital input capacitance
t_{ON} (EN)	Delay time between the 50% and 90% points of the digital input and switch "ON" condition
t_{OFF} (EN)	Delay time between the 50% and 10% points of the digital input and switch "OFF" condition
$t_{TRANSITION}$	Delay time between the 50% and 90% points of the digital inputs and switch "ON" condition when switching from one address state to another
t_{OPEN}	"OFF" time measured between 50% points of both switches when switching from one address state to another
V_{INL}	Maximum input voltage for Logic "0"
V_{INH}	Minimum input voltage for Logic "1"
I_{INL} (I_{INH})	Input current of the digital input
V_{DD}	Most positive voltage supply
V_{SS}	Most negative voltage supply
I_{DD}	Positive supply current
I_{SS}	Negative supply current

OUTLINE DIMENSIONS


Dimensions shown in inches and (mm).

28-Lead Plastic DIP (Suffix N)

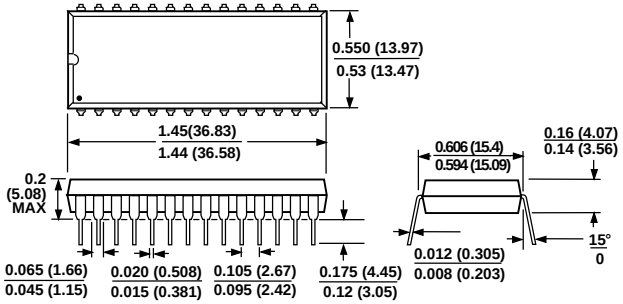


LEAD NO. 1 IDENTIFIED BY DOT OR NOTCH
LEADS ARE SOLDER OR TIN PLATED KOVAR OR ALLOY 42

28-Lead Cerdip (Suffix Q)

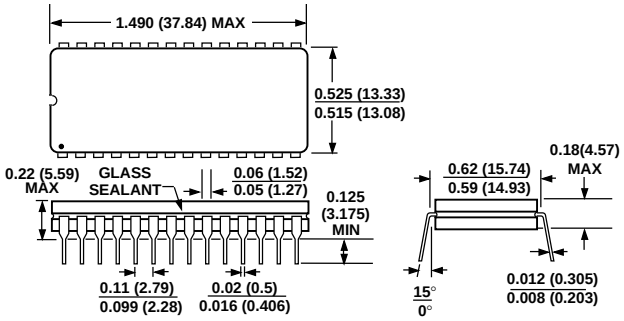


LEAD NO. 1 IDENTIFIED BY DOT OR NOTCH
LEADS ARE SOLDER OR TIN PLATED KOVAR OR ALLOY 42


28-Lead SOIC (Suffix R)

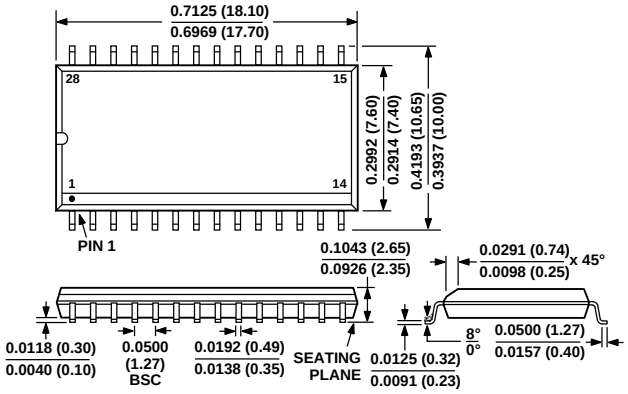


28-Lead TSSOP (Suffix RU)

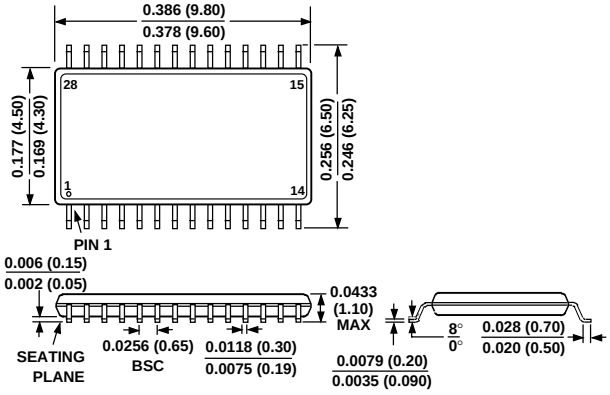

28-Terminal Plastic Leaded Chip Carrier (Suffix P)

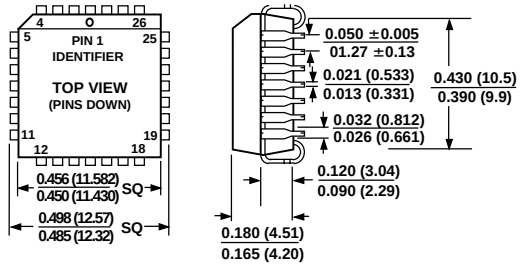

28-Terminal Leadless Ceramic Chip Carrier (Suffix E)

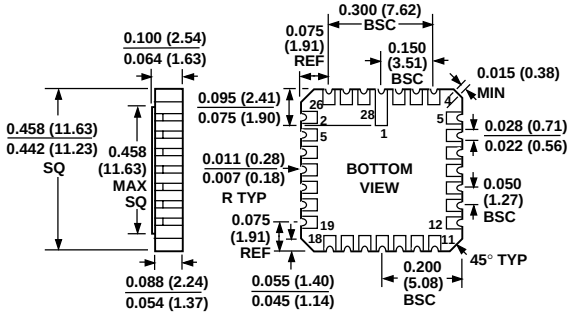

C1150c–0–6/98

PRINTED IN U.S.A.