
ADSANTEC
Ultra High-Speed Mixed Signal ASICs

Advanced Science And Novel Technology Company, Inc.
2790 Skypark Drive Suite 112, Torrance, CA 90505

Offices: 310-530-9400 / Fax: 310-530-9402
www.adsantec.com

ASNT5190B-KMC
DC-64*Gbps* Broadband Digital 1:2 Demultiplexer

- High speed broadband 1:2 Demultiplexer
- External control of internal clock's duty cycle
- Exhibits low jitter and limited temperature variation over industrial temperature range
- Ideal for high speed proof-of-concept prototyping
- Fully differential CML input interfaces
- Fully differential CML output interface with 400*mV* single-ended swing
- Single +3.3*V* or -3.3*V* power supply
- Power consumption: 600*mW*
- Fabricated in SiGe for high performance, yield, and reliability
- Custom CQFP 24-pin package

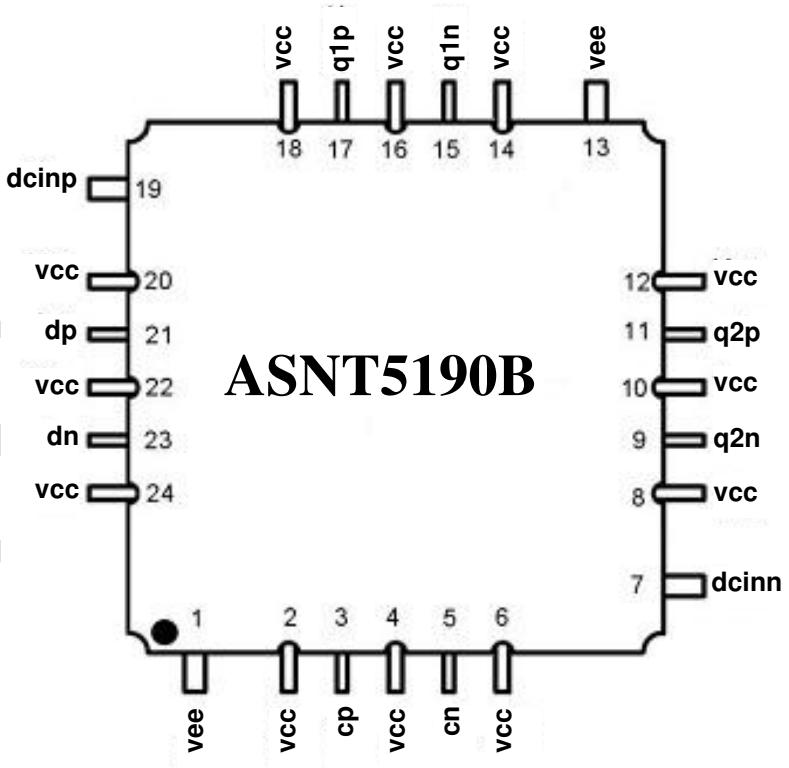

PRELIMINARY

Advanced Science And Novel Technology Company, Inc.
2790 Skypark Drive Suite 112, Torrance, CA 90505
Offices: 310-530-9400 / Fax: 310-530-9402
www.adsantec.com

DESCRIPTION

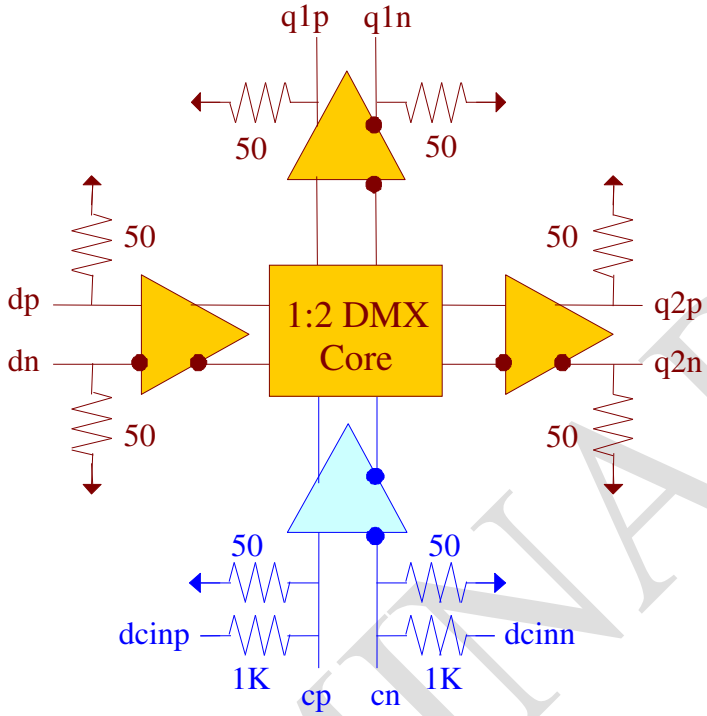


Fig. 1. Functional Block Diagram

The temperature stable ASNT5190B-KMC SiGe IC can be utilized as a high speed 1:2 demultiplexer, and is intended for use in high-speed measurement / test equipment. The IC shown in Fig. 1 can receive a high speed differential data input signal dp/dn and effectively demultiplex it into two high speed differential data output signals q1p/q1n and q2p/q2n by using a high speed differential clock input signal cp/cn. The duty cycle of the internal clock can be adjusted through ports dcinp/dcinn.

The part's I/O's support the CML logic interface with on chip 50*Ohm* termination to vcc and may be used differentially, AC/DC coupled, single-ended, or in any combination (see also POWER SUPPLY CONFIGURATION). In the DC-coupling mode, the input signal's common mode voltage should comply with the specifications shown in ELECTRICAL CHARACTERISTICS. In the AC-coupling mode, the input termination provides the required common mode voltage automatically. The differential DC signaling mode is recommended for optimal performance.

POWER SUPPLY CONFIGURATION

The part can operate with either a negative supply (vcc = 0.0*V* = ground and vee = −3.3*V*), or a positive supply (vcc = +3.3*V* and vee = 0.0*V* = ground). In case of a positive supply, all I/Os need AC termination when connected to any devices with 50*Ohm* termination to ground. Different PCB layouts will be needed for each different power supply combination.

All the characteristics detailed below assume vcc = 0.0*V* and vee = -3.3*V*.

PRELIMINARY

Advanced Science And Novel Technology Company, Inc.
2790 Skypark Drive Suite 112, Torrance, CA 90505
Offices: 310-530-9400 / Fax: 310-530-9402
www.adsantec.com

ABSOLUTE MAXIMUM RATINGS

Caution: Exceeding the absolute maximum ratings may cause damage to this product and/or lead to reduced reliability. Functional performance is specified over the recommended operating conditions for power supply and temperature only. AC and DC device characteristics at or beyond the absolute maximum ratings are not assumed or implied. All min and max voltage limits are referenced to ground.

Table 1. Absolute Maximum Ratings

Parameter	Min	Max	Units
Supply Voltage (vee)		-3.6	*V*
Power Consumption		0.65	*W*
RF Input Voltage Swing (SE)		1.0	*V*
Case Temperature		+90	*ºC*
Storage Temperature	-40	+100	*ºC*
Operational Humidity	10	98	*%*
Storage Humidity	10	98	*%*

TERMINAL FUNCTIONS

TERMINAL			DESCRIPTION
Name	**No.**	**Type**	
High-Speed I/Os			
dp	21	CML input	Differential data input signals with internal 50*Ohm* termination to vcc
dn	23		
q1p	17	CML output	Differential data output signals with internal 50*Ohm* termination to vcc
q1n	15		
q2p	11	CML output	Differential data output signals with internal 50*Ohm* termination to vcc
q2n	9		
cp	3	CML input	Differential clock input signals with internal 50*Ohm* termination to vcc
cn	5		
Control Ports			
dcinp	19	Analog inputs	cp common mode control voltage
dcinn	7		cn common mode control voltage
Supply and Termination Voltages			
Name	**Description**		**Pin Number**
vcc	Positive power supply (+3.3*V* or 0)		2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24
vee	Negative power supply (0*V* or -3.3*V*)		1, 13

PRELIMINARY

Advanced Science And Novel Technology Company, Inc.
2790 Skypark Drive Suite 112, Torrance, CA 90505

Offices: 310-530-9400 / Fax: 310-530-9402
www.adsantec.com

ELECTRICAL CHARACTERISTICS

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
General Parameters					
vee	-3.1	-3.3	-3.5	*V*	±6%
vcc		0.0		*V*	External ground
*I*vee		180		*mA*	
Power consumption		600		*mW*	
Junction temperature	-40	25	125	*°C*	
HS Input Data (dp/dn)					
Data rate	DC		64	*Gbps*	
Swing	0.05		1.0	*V*	Differential or SE, p-p
CM Voltage Level	vcc-0.8		vcc	*V*	Must match for both inputs
HS Input Clock (cp/cn)					
Frequency	DC		32	*GHz*	
Swing	0.05		1.0	*V*	Differential or SE, p-p
CM Voltage Level	vcc-0.8		vcc	*V*	Must match for both inputs
Duty cycle	45	50	55	*%*	
HS Output Data (q1p/q1n, q2p/q2n)					
Data rate	DC		32	*Gbps*	
Logic "1" level		vcc		*V*	
Logic "0" level		vcc-0.4		*V*	With external 50*Ohm* DC termination
Rise/Fall times	6	8	10	*ps*	20%-80%
Output Jitter			1	*ps*	Peak-to-peak
Common Mode Control Ports (dcinp/dcinn)					
Input signal range	-3.3		0	*V*	

PRELIMINARY

PACKAGE INFORMATION

The chip die is housed in a custom 24-pin CQFP package shown in Fig. 2. The package provides a center heat slug located on its back side to be used for heat dissipation. ADSANTEC recommends for this section to be soldered to the vcc plain, which is ground for a negative supply, or power for a positive supply.

The part's identification label is ASNT5190B-KMC. The first 9 characters of the name before the dash identify the bare die including general circuit family, fabrication technology, specific circuit type, and part version while the 3 characters after the dash represent the package's manufacturer, type, and pin out count.

This device complies with the Restriction of Hazardous Substances (RoHS) per 2011/65/EU for all ten substances.

Advanced Science And Novel Technology Company, Inc.
2790 Skypark Drive Suite 112, Torrance, CA 90505

Offices: 310-530-9400 / Fax: 310-530-9402
www.adsantec.com

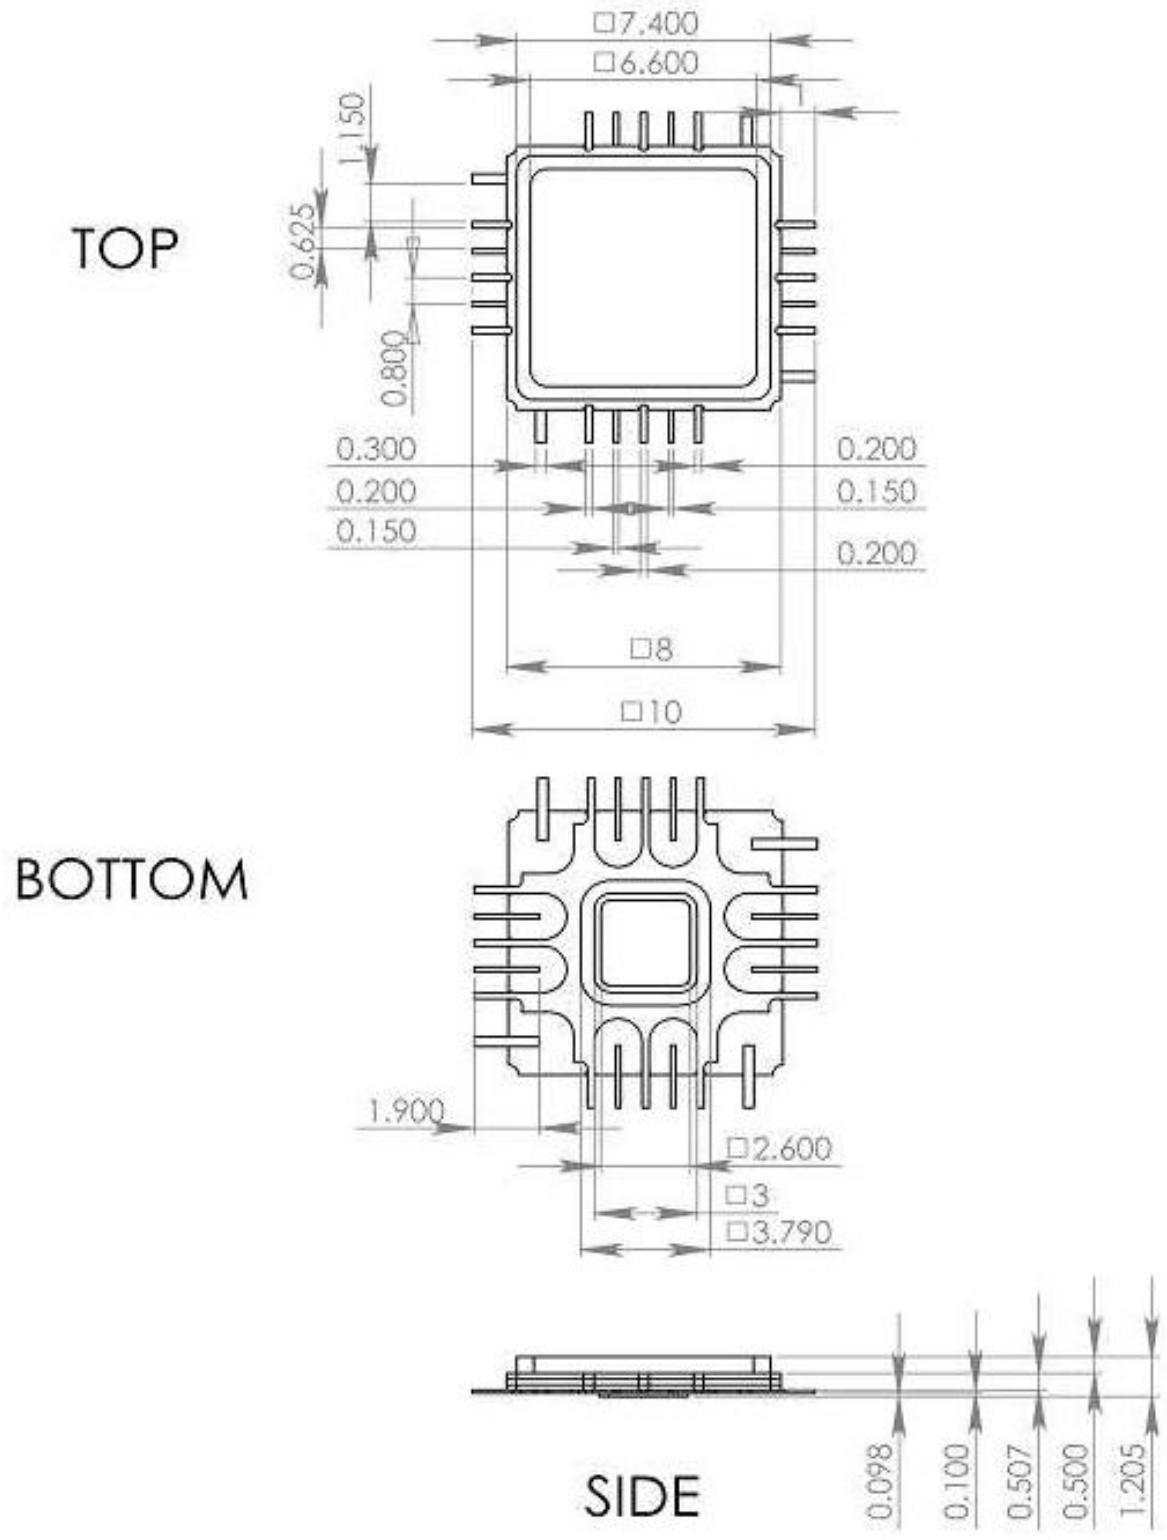


Fig. 2. CQFP 24-Pin Package Drawing (All Dimensions in mm)

Advanced Science And Novel Technology Company, Inc.
2790 Skypark Drive Suite 112, Torrance, CA 90505

Offices: 310-530-9400 / Fax: 310-530-9402
www.adsantec.com

REVISION HISTORY

Revision	Date	Changes
0.1.2	05-2020	Updated Package Information
0.0.2	07-2019	Updated Letterhead
0.0.1	09-2014	Preliminary release

PRELIMINARY