


Order code: A-MCSSP-80xxx Order color: Grey

Order code: A-MCSSP-80xxx/x


Order color:
R: Red
Y: Yellow
G: Green
B: Blue

Length Code	Length (M)
005	0.5
010	1
020	2
030	3
050	5
070	7
100	10
150	15
200	20
300	30

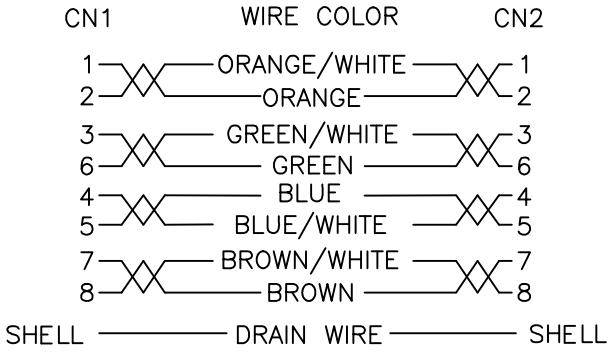

Tolerance

Length (M)	Max-M	Mix-M
0.5	0.03	0.025
1	0.04	0.035
L≥2	L x 3%	L x 3%

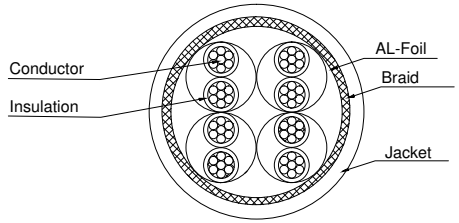

Electrical
Open/short/intermittence:100%
The operating temperature: -20°C~+60°C
The storage temperature: -20°C~+60°C

	NO.	NAME.	Q'TY	SPECIFICATION
①	4	AL-Foil	2	Double-sided conductive aluminum foil
①	3	Molding PVC	2	Molding PVC 65P
①	2	RJ45 CONN	2	RJ45 8P8C,Two Fork gold plated contacts 3u" gold Shielded
①	1	CABLE	1	SF/UTP(26AWG*x1PR)*4+AB(AL-MY),PVC OD:5.3±0.3mm

RoHS compliant

Unit: mm

		Date	Name
Drawn		04.08.2017	Fred
Approved		12.04.2022	Luca

Scale	FREE
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
①	Change the plant	12.04.2022	Luca
⓪	Drawn	04.08.2017	Fred

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-MCSSP-80xxx/x

Drawing-No.
ASS 0841 CA

rev01

Replace

Sheet

CAB0742