

ITEM NO	L	Color
A-AV-02-45-28-183-S	1830±30mm	Black
A-AV-02-45-28-091-S	915±20mm	Black
A-AV-02-45-28-183-S1	1830±30mm	White
A-AV-02-45-28-091-S1	915±20mm	White

NOTE:
1.100% OPEN SHORT & MISWIRE TEST.
2.HIPOT TEST:AT DC300V
3.INSULATION RESISTANCE:10M OHM/MIN.
4.CONDUCTIVE RESISTANCE: 5 OHM/MAX.

PIN ASSIGNMENT

P1	
1	RED
2	WHITE
3	GREEN
4	BLACK

NO.	NAME	DESCRIPTION	Q'TY	UNIT
⑤	HT-TUBE	OD4.0mm,L=25mm	1	PCS
④	INNER MOLD	LDPE	N/A	G
③	OUTER MOLD	PVC，45P	N/A	G
②	CONN	3.5ST MALE TRAY6.0MM,L=30MM, NICKEL PLATED	1	PCS
①	CABLE	NOUL 28AWG(7/0.12BC)*4C+A,80°C,OD3.8	1	PCS

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
⓪	Drawn	05.11.2021	Daniel

	Date	Name
Drawn	05.11.2021	Daniel
Approved	05.11.2021	Daniel

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-AV-02-45-28-xxx-x


Drawing-No.
ASS 10058 CA

rev00

Replace

Sheet
1 / 2

CAB1042

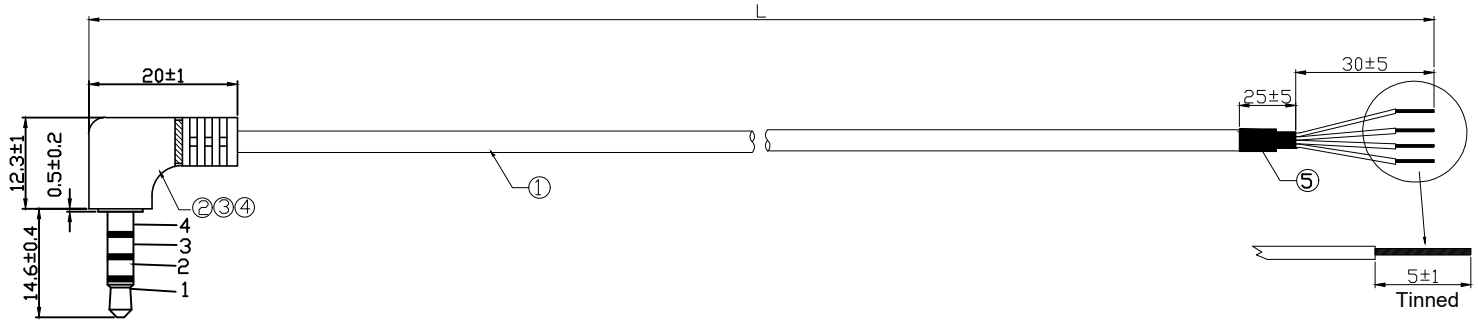

ITEM NO	L	Color
A-AV-02-45-28-183-S2	1830±30mm	Black
A-AV-02-45-28-091-S2	915±20mm	Black
A-AV-02-45-28-183-S3	1830±30mm	White
A-AV-02-45-28-091-S3	915±20mm	White

NOTE:
1.100% OPEN SHORT & MISWIRE TEST.
2.HIPOT TEST:AT DC300V
3.INSULATION RESISTANCE:10M OHM/MIN.
4.CONDUCTIVE RESISTANCE: 5 OHM/MAX.

PIN ASSIGNMENT

P1	
1	RED
2	WHITE
3	GREEN
4	BLACK

NO.	NAME	DESCRIPTION	Q'TY	UNIT
⑤	HT-TUBE	OD4.0mm,L=25mm	1	PCS
④	INNER MOLD	LDPE	N/A	G
③	OUTER MOLD	PVC，45P	N/A	G
②	CONN	3.5ST MALE TRAY6.0MM,L=30MM, NICKEL PLATED	1	PCS
①	CABLE	NOUL 28AWG(7/0.12BC)*4C+A,80°C,OD3.8	1	PCS

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
⓪	Drawn	05.11.2021	Daniel

	Date	Name
Drawn	05.11.2021	Daniel
Approved	05.11.2021	Daniel

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-AV-02-45-28-xxx-x

Drawing-No.
ASS 10058 CA

rev00

Replace

Sheet
2 / 2

CAB1042