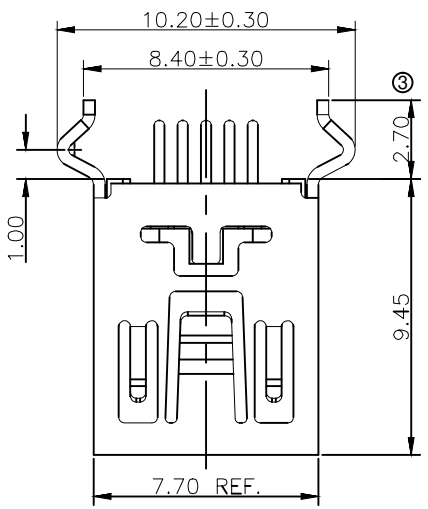
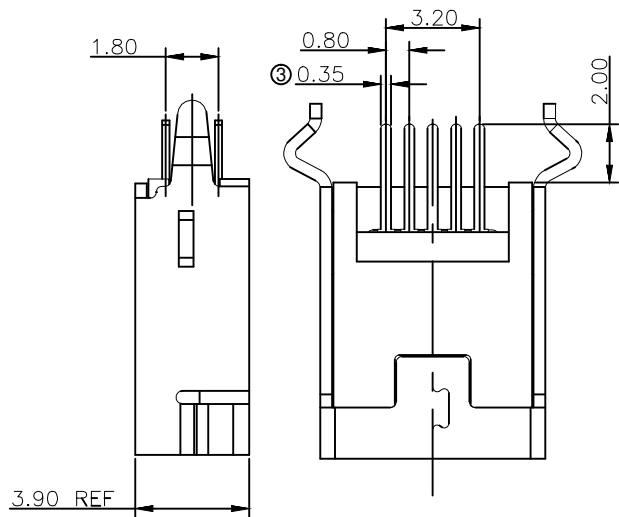
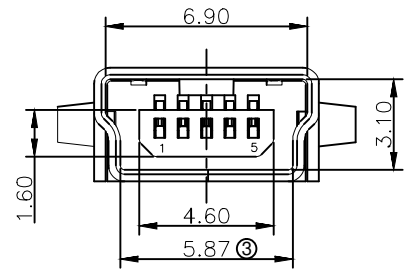
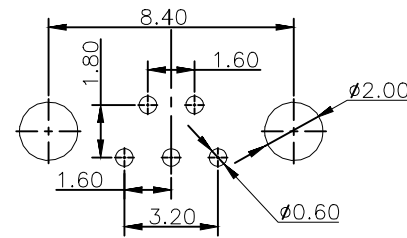


	1	2	3	4	5	6	7						
A	④ USB2.0COMPLIANT							A					
B						NOTES: 1.Material: 1.1 Housing: LCP+30%GF UL94V-0, Color Black 1.2 Shell: Brass 1.3 Contact :Phosphor Bronze 2. FINISH: 2.1 Contact Area: 15u" Au Solder Area: Tin Plated Under: Ni Plated 3.MECHANICAL: 3.1 Mating Force:3.57kgf Max. 3.2 Unmating Force:1.02kgf Min 3.3 Durability:1500 cycles Min 4.ELECTRICAL: ⑥ 4.1 Current Rating:1.8A Max 4.2 Dielectric Strength:500V AC FOR 1 MINUTE 4.3 Contact Resistance:50mΩ Max 4.4 Insulation Resistance:100 MΩ Min 5.Operating temperature: -55°C TO +85°C 6.PACKING: A-USB B-M5-TOP = Tray ⑤ A-USB B-M5-TOP2 = Tape&Reel		B					
C								C					
D								D					
E								E					
F								F					
G	RoHS compliant		Scale	Free	⑥	Change current rating to 1.8A Max	04.05.2020	Luca		Date	Name	Customer-No.	G
TOLERANCE			⑤	New P/N with T&R packaging	15.08.2016	S.Bölling	Drawn	19.02.2007	Hellwig	ASSMANN WSW-No. A-USB B-M5-TOP A-USB B-M5-TOP2			
X.X			±0.3	④	Update	19.08.2013	Winnie	Approved	04.05.2020			Luca	
X.XX			±0.20	③	Update	07.06.2013	Winnie				Drawing-No.		
X.XXX			±0.100	②	Update	07.07.2009	Stefanie						
DIM	TOL	①	Drawn	19.02.2007	Hellwig	Replace					rev06		
Angle	±1°	Id.	Modification	Date	Name			SHEET					
H	1	2	3	4	5	6	7						