


NOTES:

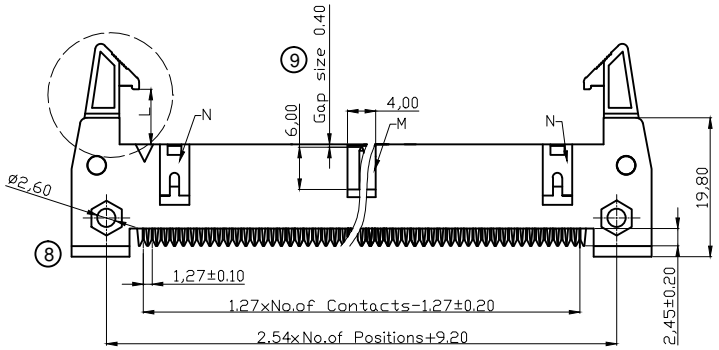
MATERIAL
1.Insulator Material:PBT+30%G.F,(UL94V-0),Grey
2.Contact Material : Brass
3.Contact Plating : 1u" Au selective Over Ni
ELECTRICAL
1.Current Rating : 3.0 AMP
2.Withstand Voltage : 1000V AC/minute
3.Contact Resistance : 20mΩ max
4.Insulation Resistance: 1000MΩ min
ENVIRONMENTAL
1.Operation Temperature: -40°C to +105°C
⑦ 2.Packing : Tube
3.10P~18P with slot"M" without slot "N"
20P-64P with slot "M" and "N"

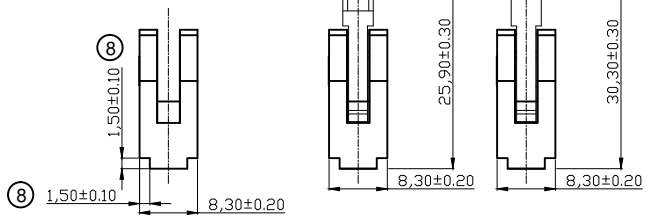
Ordering Information


AWH xxG-02x2-IDC


No. of Contacts : 10,14,16,20,26, 30,34,40,50,60,64

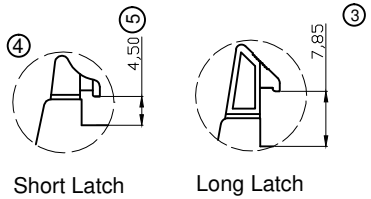
Latch Type
0 -without latch
2 -with short latches
3 -with long latches




**RoHS compliant**
**Unit: mm**

⑥ UL File No.: E198287

| Scale | Free |
|---|---|
| TOLERANCE | |
| X.X | ±0.40 |
| X.XX | ±0.25 |
| X.XXX | ±0.15 |
| ANGLE | ±3° |
| | |
| | |
| DIM | TOL |

| Id. | Modification | Date | Name |
|---|---|---|---|
| ⑨ | Add gap size 0.40mm | 28.06.2018 | Xavier |
| ⑧ | Modify the shape of insulator | 05.06.2017 | Winnie |
| ⑦ | Change the packing tray into tube | 21.09.2015 | Winnie |
| ⑥ | Add UL file no. | 12.12.2013 | Winnie |
| ⑤ | Upddate | 29.03.2013 | Amy |
| ④ | Correct drawing of short latch | 05.05.2010 | Dean |

| | Date | Name |
|---|---|---|
| Drawn | 25.01.2006 | Alex |
| Approved | 28.06.2018 | Winnie |
| | | |

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AWH xxG-02x2-IDC

Drawing-No.
ASS 2231 CO

rev09

Replace

Sheet 1/1