
⑥ USB 2.0 COMPLIANT

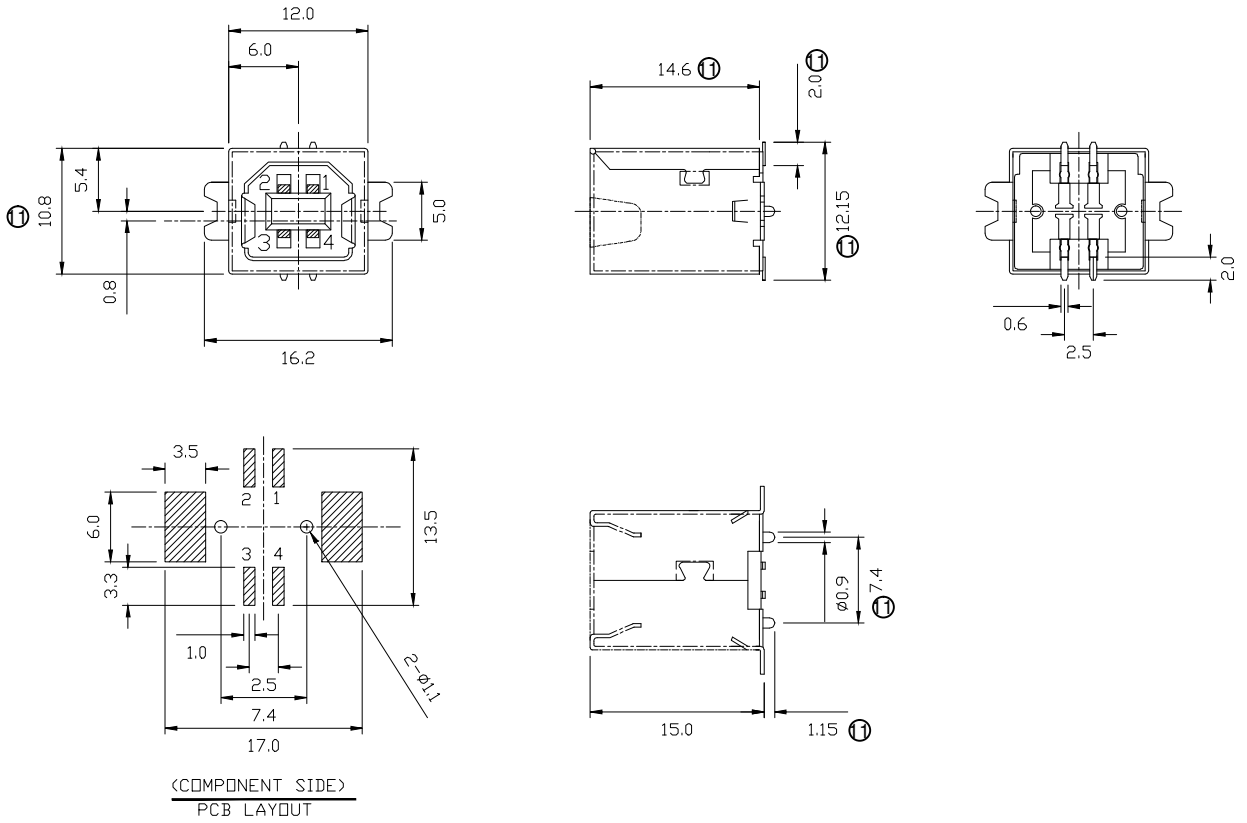

⑪ NOTES:

1.Material:
 1.1 Housing: PA9T+GF UL94V-0, Color Black
 1.2 Shell: Brass Ni plated
 1.3 Contact :Phosphor Bronze
2. FINISH:
 2.1 Contact Area: Gold Flash
 Solder Area:Tin Plated
 Under: Ni Plated
3.MECHANICAL:
 3.1 Mating Force:35N Max.
 3.2 Unmating Force:10N Min
 3.3 Durability:1500 cycles Min
4.ELECTRICAL:
 4.1 Dielectric Strength:750V AC AT SEA LEVEL
 4.2 Contact Resistance:30mΩ Max
 4.3 Insulation Resistance:1000 MΩ Min
5.PACKIING: Tray . 100 pcs/Tray；1600pcs/carton.

⑨⑪

RoHS compliant
Unit:mm

Scale	Free
TOLERANCE	
X.X	±0.38
X.XX	±0.25
X.XXX	±0.10
DIM	TOL
X.°	±3°
X.X°	±1°
Angle	TOL

Id.	Modification	Date	Name
⑪	Change the specification	01.07.2022	Luca
⑩	Update packing	15.01.2021	Luca
⑨	Update general tolerance	17.11.2020	Luca
⑧	Add soldering temperature& page 2	08.03.2016	Winnie
⑦	Add co-planarity	06.12.2014	Winnie
⑥	Add USB 2.0 compliant	27.08.2013	Winnie

	Date	Name
Drawn	20.11.2007	N.Schulz
Approved	01.07.2022	Luca

ASSMANN WSW components

Description: USB Connector
Female/ B type/ 4Pin/ SMT/ 180°

ASSMANN WSW-No.
A-USB B/SMT-TOP

Drawing-No.
ASS 2413 CO

rev11

Customer-No.

Sheet
1/1