





Panel Thickness
Screw L=5.0 For Panel Thickness Under 1.2mm
Screw L=6.0 For Panel Thickness Between 1.2-2.0mm

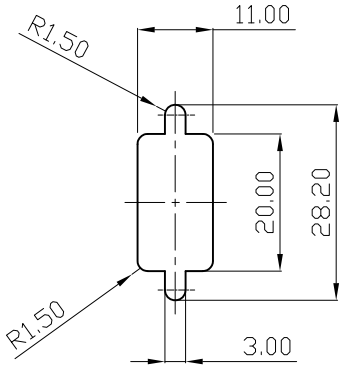

Recommended Panel Cut-Out

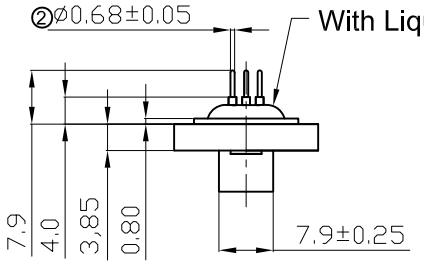


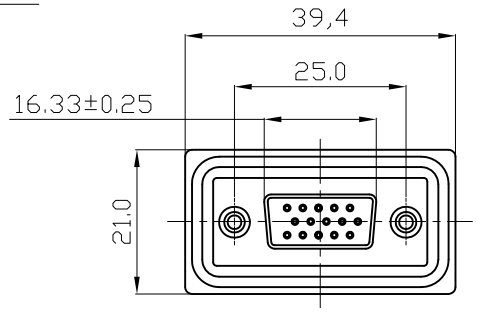



NOTES:

MATERIAL
1.Insulator Material:Black,NYLON+G/F
2.Contact Material : Copper Alloy
3.Plating : Gold Plating
4.Waterproof Rate: IP67
5.Do Mating Test After Glued

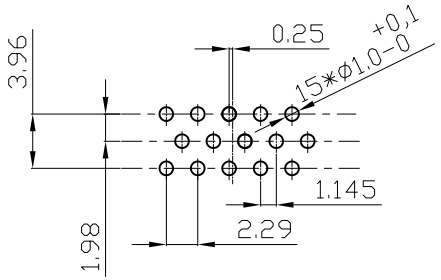

15 Pin Female Connector
PCB Pin Layout
Scale 2:1

RoHS compliant

Scale	1:1						Date	Name
TOLERANCE						Drawn	24.12.2008	JACK
X.X	±0.25					Approved	23.01.2018	Amy
X.XX	±0.10							
X.XXX	±0.05							
DIM	TOL	②	Cancel LOGO and change dimension	19.01.2018	Tom			
ANGLE	±1°	①	Drawn	24.12.2008	JACK			
X.X°	±X°	Id.	Modification	Date	Name			
Angle	TOL							

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-HDF 15 PP-WP

Drawing-No.
ASS 3273 CO

rev02

Replace

Sheet