
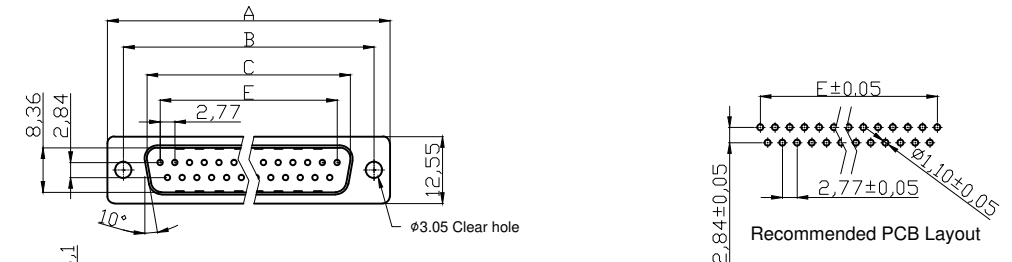
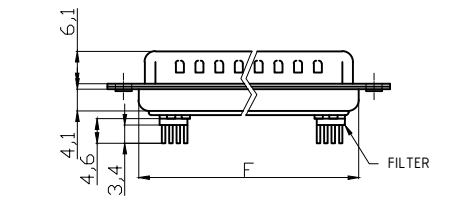

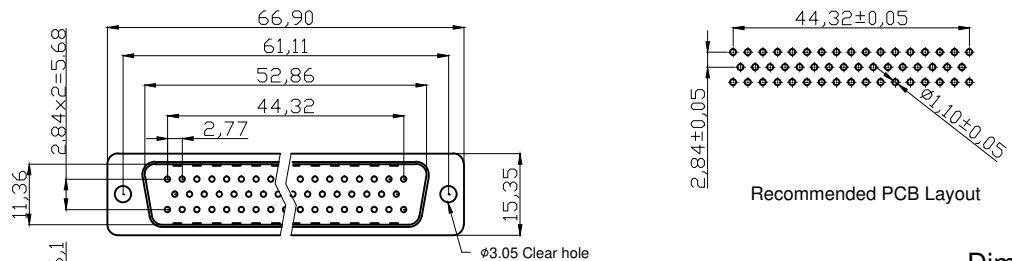
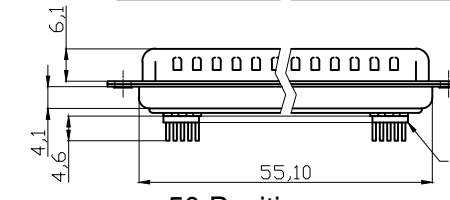


	1	2	3	4	5	6	7																															
A	Male  8,36 2,84 2,77 10° 12,55 ø3.05 Clear hole F±0.05 2,77±0.05 ø1.10±0.05 2,84±0.05 Recommended PCB Layout  6,1 4,1 4,6 3,4 F FILTER  10,72 NOTES: MATERIAL 1. Insulator Material: Glass-filled thermoplastic PBT, UL94V-0 2. Contact Material: Copper alloy 3. Shell : SPCC ELECTRICAL 1. Current Rating : 3AMP 2. Voltage Rating : 250V AC/rms 60Hz 3. Contact Resistance: 20mΩ Max at 1 AMP DC 4. Insulation Resistance: 1000MΩ min at 500 VDC 5. Withstand Voltage: 1000V AC/rms 60Hz for 1 minute ① Operating Temperature: -55°C~ +105°C Order Code: A-Dx xx PP-F Contact Type F - Female S - Male F - Ferrite plate Standard: Quality class III No. of Contact 09 / 15 / 25 / 37							A																														
B								B																														
C								C																														
D	 66,90 61,11 52,86 44,32 2,77 11,36 2,84x2=5,68 15,35 ø3.05 Clear hole 44,32±0.05 2,84±0.05 ø1.10±0.05 Recommended PCB Layout  6,1 4,1 4,6 F FILTER  13,42 Dimensions <table><tr><th>Positions</th><th>A</th><th>B</th><th>C</th><th>E</th><th>F</th></tr><tr><td>09</td><td>30.81</td><td>24.99</td><td>16.92</td><td>11.08</td><td>19.20</td></tr><tr><td>15</td><td>39.20</td><td>33.30</td><td>25.25</td><td>19.39</td><td>27.70</td></tr><tr><td>25</td><td>53.04</td><td>47.04</td><td>38.96</td><td>33.24</td><td>41.10</td></tr><tr><td>37</td><td>69.40</td><td>63.50</td><td>55.42</td><td>49.86</td><td>57.30</td></tr></table>							Positions	A	B	C	E	F	09	30.81	24.99	16.92	11.08	19.20	15	39.20	33.30	25.25	19.39	27.70	25	53.04	47.04	38.96	33.24	41.10	37	69.40	63.50	55.42	49.86	57.30	D
Positions	A	B	C	E	F																																	
09	30.81	24.99	16.92	11.08	19.20																																	
15	39.20	33.30	25.25	19.39	27.70																																	
25	53.04	47.04	38.96	33.24	41.10																																	
37	69.40	63.50	55.42	49.86	57.30																																	
E								E																														
F	50 Positions <table><tr><th>Positions</th><th>A</th><th>B</th><th>C</th><th>E</th><th>F</th></tr><tr><td>09</td><td>30.81</td><td>24.99</td><td>16.92</td><td>11.08</td><td>19.20</td></tr><tr><td>15</td><td>39.20</td><td>33.30</td><td>25.25</td><td>19.39</td><td>27.70</td></tr><tr><td>25</td><td>53.04</td><td>47.04</td><td>38.96</td><td>33.24</td><td>41.10</td></tr><tr><td>37</td><td>69.40</td><td>63.50</td><td>55.42</td><td>49.86</td><td>57.30</td></tr></table>							Positions	A	B	C	E	F	09	30.81	24.99	16.92	11.08	19.20	15	39.20	33.30	25.25	19.39	27.70	25	53.04	47.04	38.96	33.24	41.10	37	69.40	63.50	55.42	49.86	57.30	F
Positions	A	B	C	E	F																																	
09	30.81	24.99	16.92	11.08	19.20																																	
15	39.20	33.30	25.25	19.39	27.70																																	
25	53.04	47.04	38.96	33.24	41.10																																	
37	69.40	63.50	55.42	49.86	57.30																																	
G	RoHS compliant Unit:mm <table><tr><th>Scale</th><th>Free</th></tr><tr><td>TOLERANCE</td><td></td></tr><tr><td>X.</td><td>±0.38</td></tr><tr><td>X.X</td><td>±0.25</td></tr><tr><td>X.XX</td><td>±0.13</td></tr><tr><td>DIM</td><td>TOL</td></tr><tr><td>X.°</td><td>±3°</td></tr><tr><td>X.X°</td><td>±1.0°</td></tr><tr><td>Angle</td><td>TOL</td></tr></table> <table><tr><th>Date</th><th>Name</th><th>Description:</th></tr><tr><td>15.08.2012</td><td>Lucas</td><td>D-SUB Connector</td></tr><tr><td>23.12.2020</td><td>Luca</td><td>ASSMANN WSW-No.</td></tr></table>							Scale	Free	TOLERANCE		X.	±0.38	X.X	±0.25	X.XX	±0.13	DIM	TOL	X.°	±3°	X.X°	±1.0°	Angle	TOL	Date	Name	Description:	15.08.2012	Lucas	D-SUB Connector	23.12.2020	Luca	ASSMANN WSW-No.	G			
Scale	Free																																					
TOLERANCE																																						
X.	±0.38																																					
X.X	±0.25																																					
X.XX	±0.13																																					
DIM	TOL																																					
X.°	±3°																																					
X.X°	±1.0°																																					
Angle	TOL																																					
Date	Name	Description:																																				
15.08.2012	Lucas	D-SUB Connector																																				
23.12.2020	Luca	ASSMANN WSW-No.																																				
H	① Update operating temperature 23.12.2020 Luca ② Drawn 15.08.2012 Lucas ASSMANN WSW components <table><tr><th>Drawing-No.</th><th>rev01</th></tr><tr><td>ASS 4898 CO</td><td></td></tr></table> <table><tr><th>Customer-No.</th><th>Sheet</th></tr><tr><td></td><td>1/2</td></tr></table>							Drawing-No.	rev01	ASS 4898 CO		Customer-No.	Sheet		1/2	H																						
Drawing-No.	rev01																																					
ASS 4898 CO																																						
Customer-No.	Sheet																																					
	1/2																																					
	1	2	3	4	5	6	7																															

