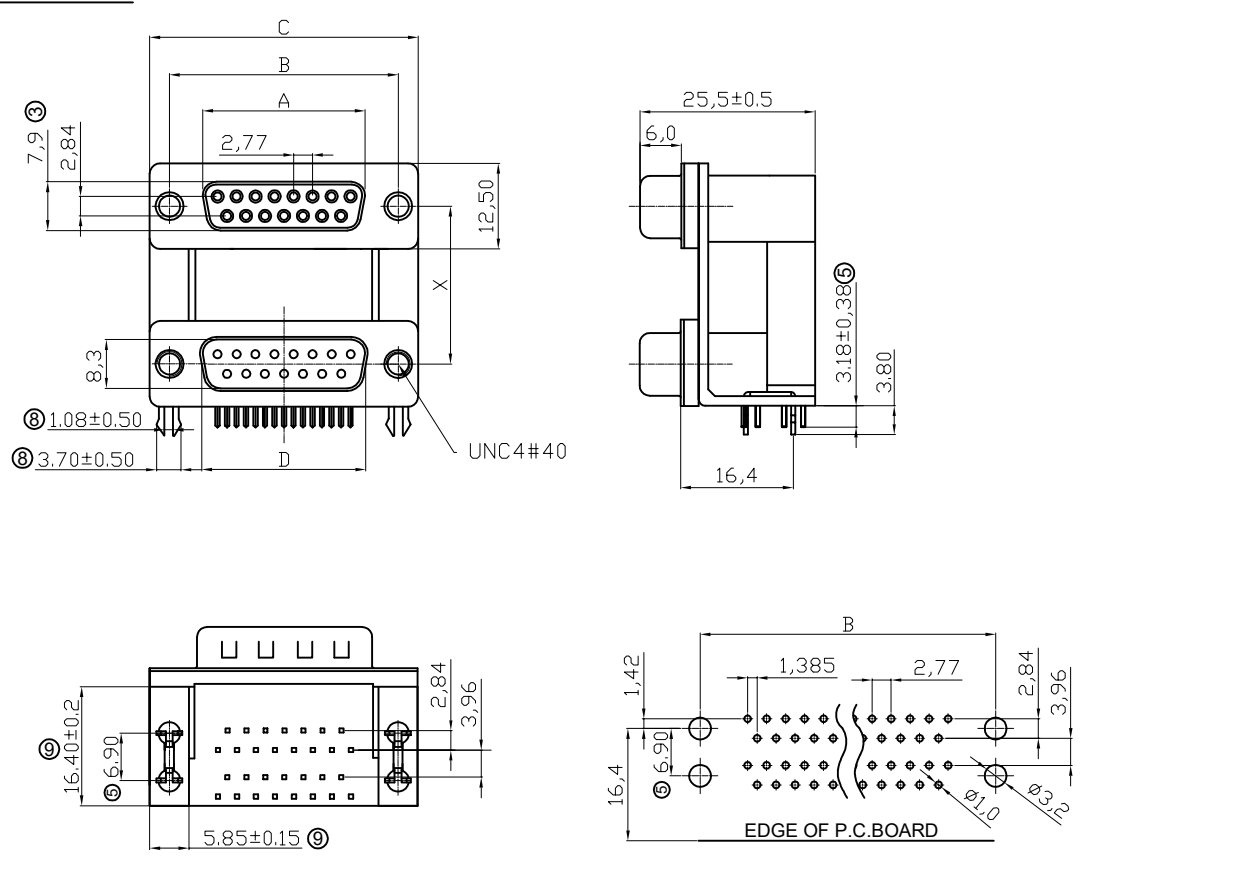


		1		2		3		4		5		6		7																												
A		Without Screw														A																										
B																B																										
C		SPECIFICATION MATERIAL Insulator: PBT, rated UL94V-0, black Contacts: Copper alloy Shell: Steel : 7439-89-6 Rivet,Boardlock: Copper alloy														C																										
D		CONTACT PLATING Contact area: Gold flash Solder tails: 100u" Tin over 40u" Nickel Shell plating: Tin plated Underplate: 50u" Nickel														D																										
E		ELECTRICAL Operation voltage: 250 VAC max. Current rating: 3 Amps max. Contact resistance: 25 mohms max. Insulation resistance: 3000 Mohms min @ 500 VDC Dielectric withstanding voltage: 1000 VAC / minute Operating temperature: -55°C ~ +105°C														E																										
F		① Order Code: ⑥ A-DD xx - x - x - x Empty - Without Screw UNC - With Screw (TOP / BOTTOM) 1- Male/Male 2- Male/Female 3- Female/Male 4- Female/Female Dim X _A - 15.875mm X _B - 19.05mm No. of Contacts 09 / 15 / 25 / 37														F																										
		Dimensions																																								
		<table><tr><th>POSITION</th><th>A</th><th>B</th><th>C</th><th>D</th></tr><tr><td>9</td><td>16.30</td><td>25.00</td><td>30.8</td><td>16.92</td></tr><tr><td>15</td><td>24.60</td><td>33.30</td><td>39.2</td><td>25.25</td></tr><tr><td>25</td><td>38.30</td><td>47.10</td><td>53.1</td><td>38.96</td></tr><tr><td>37</td><td>54.80</td><td>63.50</td><td>69.4</td><td>55.42</td></tr></table>														POSITION	A	B	C	D	9	16.30	25.00	30.8	16.92	15	24.60	33.30	39.2	25.25	25	38.30	47.10	53.1	38.96	37	54.80	63.50	69.4	55.42		
POSITION	A	B	C	D																																						
9	16.30	25.00	30.8	16.92																																						
15	24.60	33.30	39.2	25.25																																						
25	38.30	47.10	53.1	38.96																																						
37	54.80	63.50	69.4	55.42																																						
		RECOMMENDED P.C.B LAYOUT (TOP VIEW) TOLERANCES: ±0.10mm																																								
G		RoHS compliant Unit: mm		Scale	Free	⑨	Add dimensions and tolerances	11.11.2021	Peter		Date	Name	Description. D-SUB Connector Right Angle			G																										
				TOLERANCE		⑧	Add dimensions and tolerances	10.11.2021	Peter	Drawn	31.08.2012	Winnie	ASSMANN WSW-No. A-DD XX X-X																													
				X.	±0.50	⑦	Add version with UNC 4-#40 and adjust distribution	30.01.2019	Xavier	Approved	11.11.2021	Peter																														
				X.X	±0.30	⑥	Add contact style	20.03.2015	Winnie				Drawing-No. ASS 4956 CO			rev09																										
				X.XX	±0.20	⑤	Correct the 7.90mm into 6.90mm	15.08.2014	Winnie	ASSMANN WSW components																																
				DIM	TOL	④	Update	24.04.2013	Winnie				Customer-No.			Sheet 1/2																										
H				Angle	±5°	Id.	Modification	Date	Name																																	
		1		2		3		4		5		6		7		SV4638																										

	1	2	3	4	5	6	7																																		
A	With Screw Inner thread Out thread <table><tr><th>Dim. a</th><th>Dim. b</th><th>Inner thread</th><th>Out thread</th></tr><tr><td>4.8</td><td>11.8</td><td>4-#40</td><td>4-#40</td></tr></table> SPECIFICATION MATERIAL Insulator: PBT, rated UL94V-0 , black Contacts: Copper alloy Shell: Steel : 7439-89-6 Rivet, Boardlock: Copper alloy CONTACT PLATING Contact area: Gold flash Solder tails: 100u" Tin over 40u" Nickel Shell plating: Tin plated Underplate: 50u" Nickel ELECTRICAL Operation voltage: 250 VAC max. Current rating: 3 Amps max. Contact resistance: 25 mohms max. Insulation resistance: 3000 Mohms min @ 500 VDC Dielectric withstanding voltage: 1000 VAC / minute Operating temperature: -55°C ~ +105°C ① Order Code: ⑥ A-DD xx - x - x - x Empty - Without Screw UNC - With Screw (TOP / BOTTOM) 1- Male/Male 2- Male/Female 3- Female/Male 4- Female/Female Dim X: A - 15.875mm B - 19.05mm ③ No. of Contacts 09 / 15 / 25 / 37 ④ Dimensions <table><tr><th>POSITION</th><th>A</th><th>B</th><th>C</th><th>D</th></tr><tr><td>9</td><td>16.30</td><td>25.00</td><td>30.8</td><td>16.92</td></tr><tr><td>15</td><td>24.60</td><td>33.30</td><td>39.2</td><td>25.25</td></tr><tr><td>25</td><td>38.30</td><td>47.10</td><td>53.1</td><td>38.96</td></tr><tr><td>37</td><td>54.80</td><td>63.50</td><td>69.4</td><td>55.42</td></tr></table>							Dim. a	Dim. b	Inner thread	Out thread	4.8	11.8	4-#40	4-#40	POSITION	A	B	C	D	9	16.30	25.00	30.8	16.92	15	24.60	33.30	39.2	25.25	25	38.30	47.10	53.1	38.96	37	54.80	63.50	69.4	55.42	A
Dim. a	Dim. b	Inner thread	Out thread																																						
4.8	11.8	4-#40	4-#40																																						
POSITION	A	B	C	D																																					
9	16.30	25.00	30.8	16.92																																					
15	24.60	33.30	39.2	25.25																																					
25	38.30	47.10	53.1	38.96																																					
37	54.80	63.50	69.4	55.42																																					
B								B																																	
C								C																																	
D								D																																	
E								E																																	
F								F																																	
G	RoHS compliant Unit: mm		Scale	Free	⑨	Add dimensions and tolerances	11.11.2021	Peter		Date	Name	Description. D-SUB Connector Right Angle UNC Screw		G																											
TOLERANCE			⑧	Add dimensions and tolerances	10.11.2021	Peter	Drawn	31.08.2012	Winnie	ASSMANN WSW-No.			⑦ A-DD XX X-X-UNC																												
X.			±0.50	⑦	Add version with UNC 4-#40 and adjust distribution	30.01.2019	Xavier	Approved	11.11.2021	Peter	Drawing-No.																														
X.X			±0.30	⑥	Add contact style	20.03.2015	Winnie				ASS 4956 CO			rev09																											
X.XX			±0.20	⑤	Correct the 7.90mm into 6.90mm	15.08.2014	Winnie	ASSMANN WSW components			Customer-No.																														
DIM			TOL	④	Update	24.04.2013	Winnie				Sheet 2/2																														
H			Angle	±5°	Id.	Modification	Date	Name						H																											
	1	2	3	4	5	6	7	SV4638																																	