

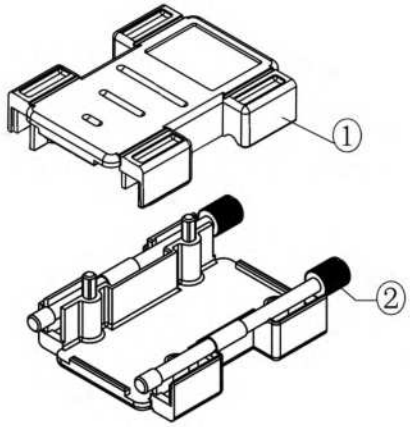


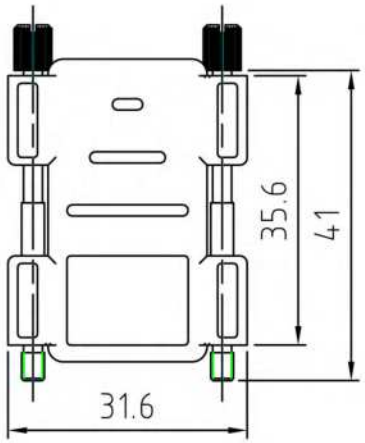

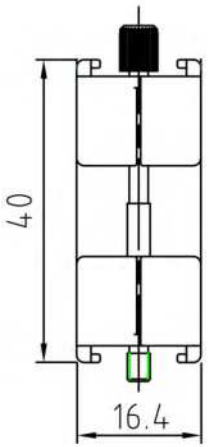

TECHNICAL SPECIFICATIONS

Material: ABS Plastic, UL94 V-0
Operating Temperature: -30°C to +110°C
Jackscrews: UNC 4-40

No. of contacts: 09-15-25

Item	QTY	Part description
1	2	Cover Halves
2	2	UNC 4-40x47 Jackscrew

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
0~6	±0.10
6~30	±0.20
30~120	±0.30
120~400	±0.50
DIM	Tol
Angle	±1°
Angle	Tol

Id.	Modification	Date	Name
0	Drawn	17.08.2017	S.Bölling

	Date	Name
Drawn	17.08.2017	S.Bölling
Approved	17.08.2017	S.Bölling

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-09NB4


Drawing-No.
ASS_5245_CO


rev00


Replace

Sheet 1/3

SV4382

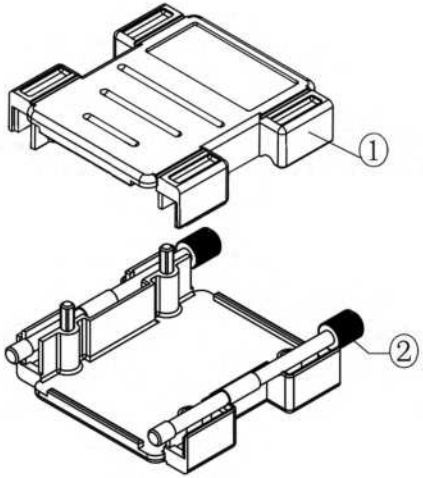

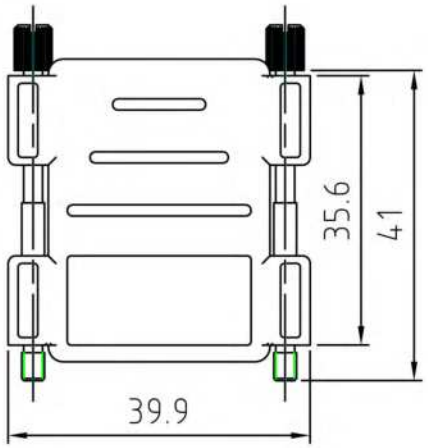

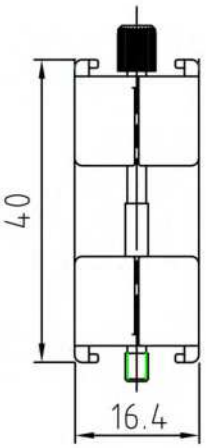

TECHNICAL SPECIFICATIONS

Material: ABS Plastic, UL94 V-0
Operating Temperature: -30°C to +110°C
Jackscrews: UNC 4-40

No. of contacts: 09-15-25

Item	QTY	Part description
1	2	Cover Halves
2	2	UNC 4-40x47 Jackscrew

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
0~6	±0.10
6~30	±0.20
30~120	±0.30
120~400	±0.50
DIM	Tol
Angle	±1°
Angle	Tol

Id.	Modification	Date	Name
0	Drawn	17.08.2017	S.Bölling

	Date	Name
Drawn	17.08.2017	S.Bölling
Approved	17.08.2017	S.Bölling

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-15NB4


Drawing-No.
ASS_5245_CO


rev00


Replace

Sheet 2/3

SV4382

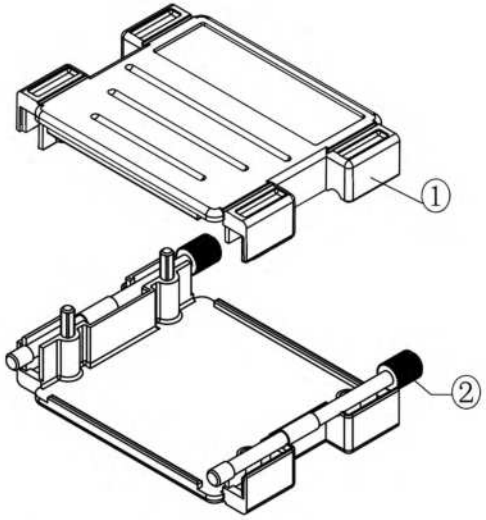

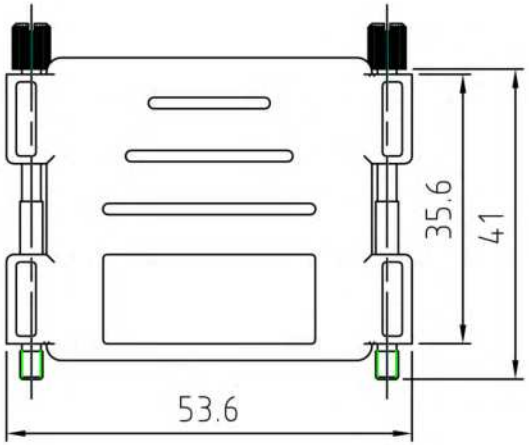

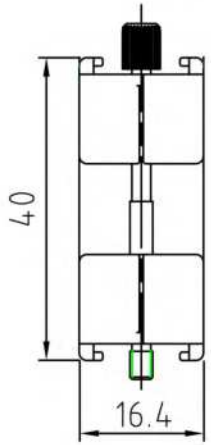

TECHNICAL SPECIFICATIONS

Material: ABS Plastic, UL94 V-0
Operating Temperature: -30°C to +110°C
Jackscrews: UNC 4-40

No. of contacts: 09-15-25

Item	QTY	Part description
1	2	Cover Halves
2	2	UNC 4-40x47 Jackscrew

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
0~6	±0.10
6~30	±0.20
30~120	±0.30
120~400	±0.50
DIM	Tol
Angle	±1°
Angle	Tol

Id.	Modification	Date	Name
0	Drawn	17.08.2017	S.Bölling

	Date	Name
Drawn	17.08.2017	S.Bölling
Approved	17.08.2017	S.Bölling

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-25NB4

Drawing-No.
ASS_5245_CO

rev00

Replace

Sheet 3/3

SV4382