

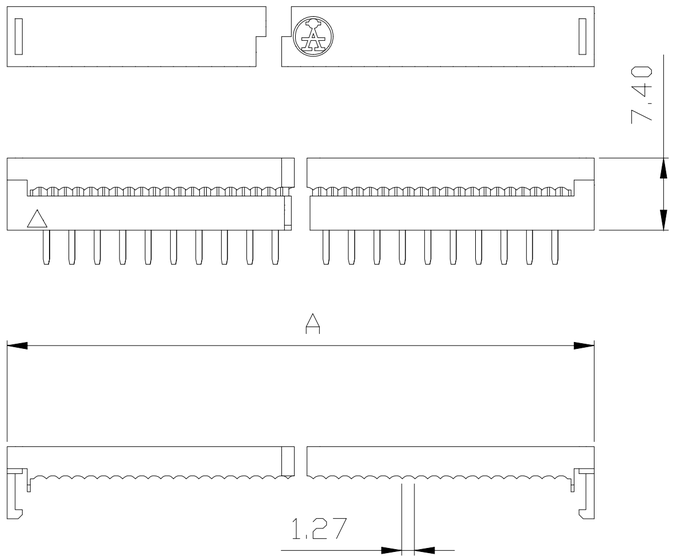


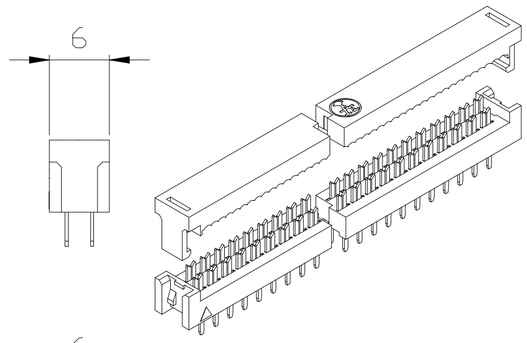

MATERIALS:
INSULATOR: P.B.T.30%GLASS FIBER,UL94V-0
CONTACT MATERIAL: BRASS OR PHOSPHOR BRONZE,
UNDERPLATED: NICKEL
CONTACT AREA: 1u"~30u" SELECTIVE GOLD
ELECTRICAL:
CURRENT RATING: 1AMP.
INSULATION RESISTANCE: 1000MΩ MIN.
DIELECTRIC WITHSTANDING: 500VAC
OPERATING TEMPERATURE: -55°C~+105°C

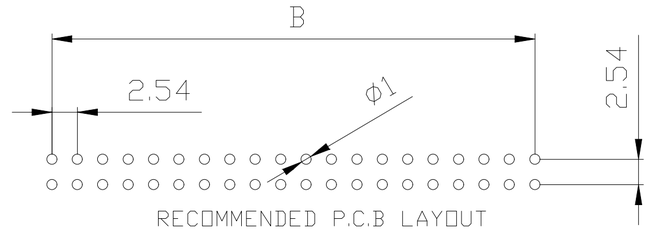

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

POSITION	A	B	POSITION	A	B
6P	12.94	5.08	26P	38.40	30.48
8P	15.48	07.62	28P	40.60	33.02
10P	18.10	10.16	30P	43.50	35.56
12P	20.51	12.70	34P	48.58	40.64
14P	23.05	15.24	40P	56.20	48.26
16P	25.64	17.78	50P	69.00	60.96
18P	28.15	20.32	60P	81.75	73.66
20P	30.78	22.86	64P	86.83	78.74
24P	35.86	27.94			

RoHS compliant
Unit: mm

Scale	FREE
TOLERANCE	
X.X	±0.4
X.XX	±0.25
X.XXX	±0.15
DIM	TOL
Angle	±3°
Angle	TOL

Id.	Modification	Date	Name
①	Drawn	26.05.2014	Ray

	Date	Name
Drawn	26.05.2014	Ray
Approved	26.05.2014	Ray

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AWLP xx/3,2-G

Drawing-No.
ASS 6447 CO

rev00

Replace

Sheet