





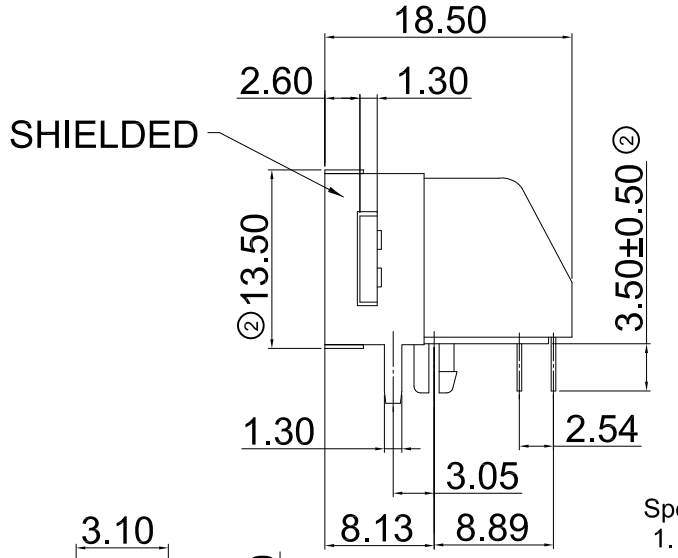

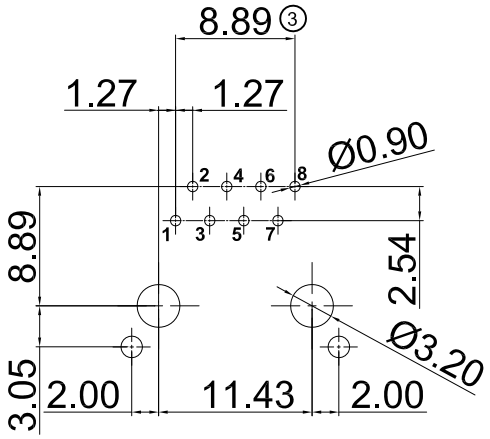

PCB LAYOUT
(TOP VIEW)





DETAIL Z
SCALE 2:1

Specification:

1. Electrical Char
 - Insulation Resistance: 500MΩ min. 500V DC for 1 minute
 - Contact Resistance: 30mΩ max.
 - Rating Current: 1.5A max.
 - ① Rating Voltage: 150V AC
 - Dielectric Voltage: 1000 Vrms at 1MA 60 sec. min.
2. Physical Char
 - Housing(Option): For Waving Soldering Process.
 PBT Glass filled (UL 94V-0) Color: Black
 - Soldering Temperature: 235°C for 5 sec.
 - Spring Wire: 0.35mm thickness Phosphor Bronze
 6u" Gold on contact area over 50u" Nickel
 - Temperature Range: -40°C to +85°C
 - Durability: 750 mating cycles min.
3. Packing: Tray

RoHS compliant
Unit:mm

Scale	Free	
TOLERANCE		
① .XX	±0.25	
.XXX	±0.13	
.XXXX	±0.05	
DIM	TOL	
Angle	+0°30'	

Id.	Modification	Date	Name
③	Update the dimensions	17.06.2019	Segal
②	Update the dimensions	30.08.2018	Segal
①	Update the tolerance & Rating Voltage	12.07.2018	Segal
⓪	Drawn	21.07.2016	Winnie

	Date	Name
Drawn	21.07.2017	Winnie
Approved	17.06.2019	Amy

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-2004-2-4-LP/S-R

Drawing-No.
ASS 7322 CO

rev03

Replace

SHEET