
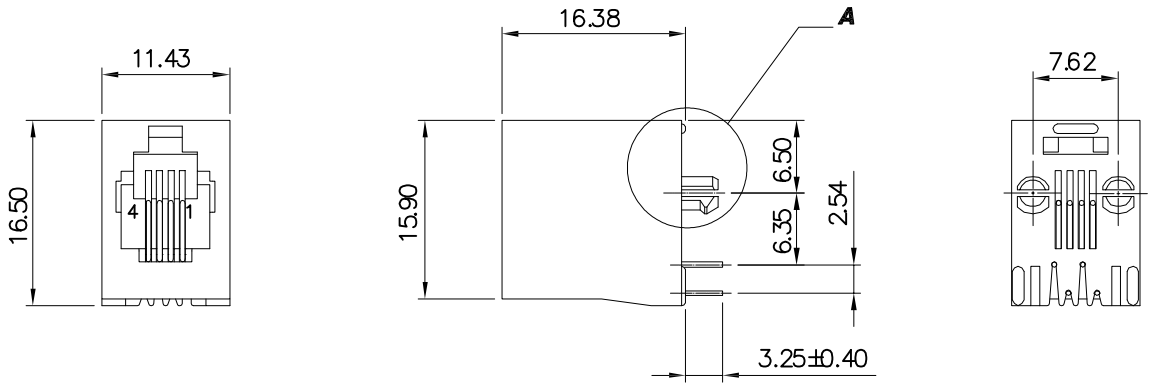
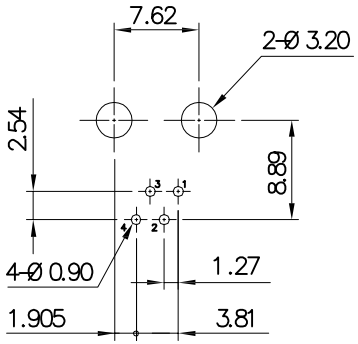



PCB LAYOUT
(Top View)

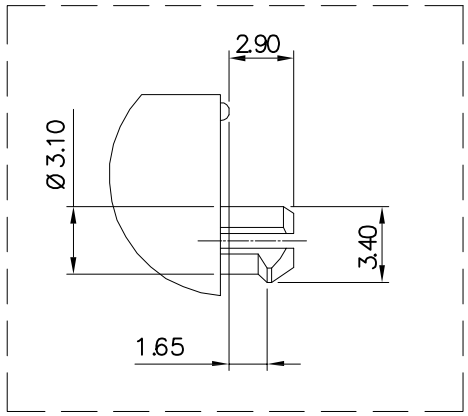


A(2:1)

Specification:

1. Electrical Char
   - Insulation Resistance: 500MΩ min. 500V DC for 1 minute
   - Contact Resistance: 20mΩ max.
   - Rating Current: 1.5A max.
   - Rating Voltage: 120V AC
   - Dielectric Voltage: 1000 Vrms at 1MA 60 sec. min.

2. Physical Char
   - Housing: PBT Glass filled (UL 94V-0) Color: Black
   - Soldering Temperature: 235°C for 5 sec.
   - Spring Wire: 0.45mm Dia Phosphor Bronze 6u" Gold plating over Nickel
   - Temperature Range: -40°C to +85°C
   - Durability: 500 mating cycles min.

3. Packing: Tray

**RoHS compliant**
Unit:mm

| | |
|---|---|
| Scale | Free |
| TOLERANCE | |
| .XX | ±0.20 |
| .XXX | ±0.13 |
| .XXXX | ±0.05 |
| DIM | TOL |
| | |
| | |
| Angle | +0°30' |

| Id. | Modification | Date | Name |
|---|---|---|---|
| 0 | Drawn | 04.08.2016 | Winnie |

| | Date | Name |
|---|---|---|
| Drawn | 04.08.2016 | Winnie |
| Approved | 04.08.2016 | Winnie |

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-2014-3-4-N-T-R

Drawing-No.
ASS 7331 CO

rev00

Replace

SHEET