


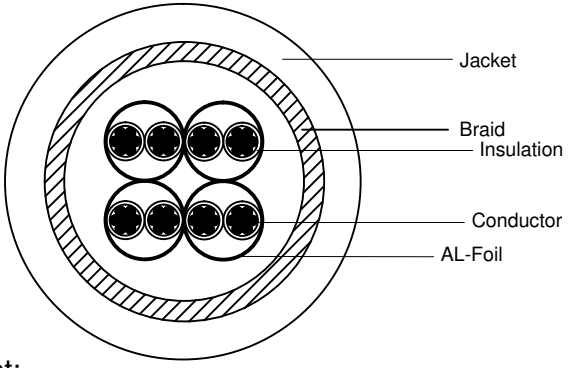

PIN OUT

CN1	WIRE COLOR	CN2
1	WHITE	1
2	ORANGE	2
3	WHITE	3
6	GREEN	6
4	BLUE	4
5	WHITE	5
7	WHITE	7
8	BROWN	8
SHELL	BRAID	SHELL

⑤ *The PIN OUT is applied to cable length ≥10M

PIN OUT

CN1	WIRE COLOR	CN2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8
SHELL	BRAID	SHELL

⑤ *The PIN OUT is applied to cable length <10M

Electrical test:
Open/short/intermitence: 100%

4	AL-FOIL	Double-sided conductive aluminum foil ④	2	PCS
3	Molding	PVC 65P Color: see order code ④	NA	KG
2	CONNECTOR	RJ45 8P8C two fork 3u" gold plated with metal shield	2	PCS
1	CABLE	CAT6a S/FTP (26AWG*1PR+A)*4+B(AM)+PVC OD=5.8± 0.3MM Color: see order code ④	NA	MM
NO:	NAME	DESCRIPTION	Q'TY	UNIT

WSW order code
AMJS0909-xxxx-xxB-26①

Cable length
0030: 0.3M
0050: 0.5M
0100: 1.0M
0150: 1.5M
0200: 2.0M
0300: 3.0M
0500: 5.0M
0700: 7.0M
1000: 10M
1500: 15M

Cable&Molding color
BK: Black
RD: Red
YE: Yellow
GN: Green
GY: Grey
BU: Blue
WH: White
BN: Brown

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
⑤	Add a PIN OUT for cable length ≥10M	22.08.2022	Luca
④	Change the plant	27.07.2022	Luca
③	Add UL Rating	02.07.2020	Winnie
②	Update the Cable specification	16.10.2018	Segal
①	Update the WSW order code	02.06.2017	Amy
⓪	Drawn	30.03.2017	Amy

		Date	Name
Drawn		30.03.2017	Amy
Approved		22.08.2022	Luca

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
① AMJS0909-xxxx-xxB-26

Drawing-No.
ASS 7944 CA

rev05

Replace

Sheet